

Technical Data

Original Instructions



Allen-Bradley

by ROCKWELL AUTOMATION

PowerFlex 755TS Products with TotalFORCE Control

Catalog Numbers 20G2, 20GE



Topic	Page
Summary of Changes	2
Introduction	2
Catalog Number Explanation	3
Product Selection—380...400V PowerFlex 755TS Drives	6
Product Selection—480V PowerFlex 755TS Drives	9
Certifications and Specifications	12
Design Considerations	19
Approximate Watts Loss	20
Derating Guidelines	21
Minimum Dynamic Brake Resistance	65
Fuse and Circuit Breaker Ratings	66
Cable Considerations	71
Motor Considerations	72
Dimensions and Weights	72
Enclosure Options	73
Pollution Degree Ratings According to EN 61800-5-1	73
Product Enclosure Ratings	73
Minimum Mounting Clearances	74
PowerFlex 755TS Drives Approximate Dimensions	75
Drive Options	93
Additional Resources	107

Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Page
Catalog numbers listed in the Product Selection tables corrected.	6...11
Ambient Temperature/Load derate curves now specify enclosure type.	43...64
Overall height changes when C3 bracket is installed on frame 1 drives. See footnote.	75
C3 bracket dimensions added to frame 4 IP20, NEMA/UL Open Type dimension drawing.	79
C3 bracket dimensions added to frame 5 IP20, NEMA/UL Open Type dimension drawing.	81
Frame 6 door graphics updated in dimension drawing.	86
Front and bottom views added to frame 7 NEMA/UL Type 1 dimension drawing.	89
Frame 7 door graphics updated in dimension drawing.	90
Catalog numbers added for feedback options with XT Corrosive Gas Protection.	97
Catalog numbers added for I/O option kits with XT Corrosive Gas Protection.	98
Catalog numbers added for safety options with XT Corrosive Gas Protection.	98

Introduction

PowerFlex® 755TS products with TotalFORCE® technology offer precise motor control and the ability to adapt to the dynamics experienced in industrial applications. TotalFORCE technology delivers exceptional motor control through precise, adaptive control of position, velocity, and torque for electric motors. It incorporates several patented features that are designed to help optimize your system and maintain productivity.

Maximize your productivity by taking advantage of the following key features that are offered in the PowerFlex 755TS products with TotalFORCE technology:

- **DeviceLogix™** – Embedded control technology that supports the manipulation of discrete outputs and drive control functions, while using discrete inputs and drive status information onboard the drive.
- **Predictive Maintenance** – Helps improve productivity by estimating the remaining life span of drive components so preventive action can be taken before component wear-out causes unplanned downtime.
- **Option Cards** – Each drive has a slot-based architecture. Supported hardware control options are available for both products, to help reduce your inventory and spare parts requirements.
- **I/O** – Option cards are available for additional analog and digital I/O.
- **Patented slot-based hardware structure** – Allows you to select option modules for safety, feedback, communications, and I/O.
- **Safe Torque Off and Safe Speed Monitor** – Provide a choice for safety levels depending on your application requirements.
- **Load Observer** – Maintain productivity with control that adapts to operating conditions.
- **Ride-Through** – Helps keep equipment running through power quality disturbances.
- **TorqProve™** – Patented control coordinates motor torque and brake operation in hoist applications.
- **Communications** – The PowerFlex 755TS products feature built-in Gigabit EtherNet/IP™ ports.
- **Packaging** – Factory and field-installable enclosure options are available to meet most environmental requirements. Options include Open Type and flange mount to support cabinet mount requirements, extra protection wall-mount for harsh environments, and debris hoods and conduit plate kits.



Catalog Number Explanation

Catalog number positions 1...7 identify the product type and voltage rating.

1...3	4	5	6	7	8...10	11	12	13	14	15	16	17	18
20G	2	A	N	D	248	J	N	O	N	N	N	N	N
	A	B	C	D	E								

A

Drive		
Code	Type	Frames
20G	PowerFlex 755TS Drives	1...7

B

Corrosive Gas Protection and Cooling Type		
Code	Description	Frames
2	Standard Protection, Forced Air	1...7
E	Corrosive Gas Protection (XT), Forced Air	1...7

C

Input Type		
Code	Description	Frames
1	AC Input with Precharge, includes DC terminals	1...5
4	DC Input with Precharge	5...7
A	AC Input with Precharge, no DC terminals	6 and 7 ⁽¹⁾

(1) The DC Bus Bar kit (20-750-DCBB3-Fx) is available for Frames 6 and 7 AC input drives that require DC bus terminals.

D

Enclosure		
Code	Description	Frames
R	IP20, NEMA/UL Open Type, Frame 1	1
F ⁽¹⁾	Flange, NEMA/UL Type 4X/12 back	2...5
G	IP54, NEMA/UL Type 12	2...7
N ⁽²⁾	IP20/IP00, NEMA/UL Open Type	2...7

(1) For Frames 6...7, a user installed flange kit (20-750-FLNG4-Fx) is available to convert a Code N drive that provides a NEMA/UL Type 4X/12 back.

(2) Frames 2...5 are IP20, Frames 6...7 are IP00.

E

Voltage Rating	
Code	Voltage
C	400V AC/540V DC
D	480V AC/650V DC

Catalog number positions 8...10 identify the product normal duty rating.

1...3 4 5 6 7 8...10 11 12 13 14 15 16 17 18
 20G 2 A N D 248 J N O N N N N N
 F1...F2

F1

PowerFlex 755TS ND Drive Ratings						
400V, 50 Hz Input						
Code	Amps	kW	Frame			
			Enclosure Code			
			F	G	N	R
2P1	2.1	0.75				
3P5	3.5	1.5				
5P0	5.0	2.2				
8P7	8.7	4	2	2	2	1
011	11.5	5.5				
015	15.4	7.5				
022	22	11				
030	30	15				
037	37	18.5	3	3	3	
043	43	22				
060	60	30	4	4	4	
061	61	30	—	—	3	
072	72	37	4	5	4	
073	73	37	—	4	—	
085	85	45	5	5	5	
086	86	45	4	—	4	—
104	104	55	5		5	
140	140	75		6		
170	170	90		6 ⁽¹⁾	6	
205	205	110				
260	260	132				
302	302	160		7		
367	367	200		7 ⁽¹⁾	7	
456	456	250				
477	477	270		—		

F2

PowerFlex 755TS ND Drive Ratings						
480V, 60 Hz Input						
Code	Amps	Hp	Frame			
			Enclosure Code			
			F	G	N	R
2P1	2.1	1				
3P4	3.4	2				
5P0	5.0	3				
8P0	8.0	5	2	2	2	1
011	11	7.5				
014	14	10				
022	22	15				
027	27	20				
034	34	25	3	3	3	
040	40	30				
052	52	40	4	4	4	
053	53	40	—	—	3	
065	65	50	4	5	4	
066	66	50	—	4	—	
077	77	60	5	5	5	
078	78	60	4	—	4	—
096	96	75	5		5	
125	125	100		6		
156	156	125		6 ⁽¹⁾	6	
186	186	150				
248	248	200				
302	302	250		7		
361	361	300		7 ⁽¹⁾	7	
415	415	350				
477	477	400		—		

(1) For Frames 6 and 7, a field-installed flange kit (20-750-TFLNG1-Fx) is available to convert a Code N drive to provide a NEMA/UL Type 4X/12 back.

Catalog number positions 11...13 identify additional product configuration.

1...3 4 5 6 7 8...10 11 12 13 14 15 16 17 18
 20G 2 A N D 248 J N O N N N N N N
 G H I

G

Filtering and CM Cap Configuration

Code	Filtering	Default CM Cap Connection	Frames
J	Yes	Jumper Installed	1...7

H

Dynamic Braking

Code	Internal Resistor ⁽¹⁾	Internal Transistor ⁽²⁾	Frames
A	No	Yes	1...7
N	No	No	6 and 7

(1) Frames 1...2 only. Internal Resistor kits (20-750-DB1-Dx) sold separately.

(2) Standard on Frames 1...5, optional on 6 and 7.

I

Human Interface Module (HIM)

Code	Operator Interface	Frames
0	No HIM	1...7

Catalog number positions 14...18 are not used.

1...3 4 5 6 7 8...10 11 12 13 14 15 16 17 18
 20G 2 A N D 248 J N O N N N N N N

Product Selection—380...400V PowerFlex 755TS Drives

380...400V AC, Three-phase Drives—IP00/IP20, NEMA/UL Type Open ^{(1) (2)}

Normal Duty				Heavy Duty				Cat. No. ^{(3) (4) (5)}	Frame Size
Output Amps			kW	Output Amps			kW		
Cont.	1 min	3 s		Cont.	1 min	3 s			
2.1	2.3	3.2	0.75	1.3	2.3	3.2	0.37	20G21RC2P1JA0NNNNN	1
3.5	3.9	5.3	1.5	2.1	3.9	5.3	0.75	20G21RC3P5JA0NNNNN	
5	5.5	7.5	2.2	3.5	5.5	7.5	1.5	20G21RC5P0JA0NNNNN	
8.7	9.6	13.1	4	5	9.6	13.1	2.2	20G21RC8P7JA0NNNNN	
11.5	12.7	17.3	5.5	8.7	13.1	17.3	4	20G21RC011JA0NNNNN	
15.4	16.9	23.1	7.5	11.5	17.3	23.1	5.5	20G21RC015JA0NNNNN	
2.1	3.1	3.7	0.75	2.1	3.1	3.7	0.75	20G21NC2P1JA0NNNNN	2
3.5	5.2	6.3	1.5	3.5	5.2	6.3	1.5	20G21NC3P5JA0NNNNN	
5	7.5	9	2.2	5	7.5	9	2.2	20G21NC5P0JA0NNNNN	
8.7	13	15.6	4	8.7	13	15.6	4	20G21NC8P7JA0NNNNN	
11.5	17.2	20.7	5.5	11.5	17.2	20.7	5.5	20G21NC011JA0NNNNN	
15.4	16.9	23.1	7.5	11.5	17.3	23.1	5.5	20G21NC015JA0NNNNN	
22	24.2	33	11	15.4	24.3	33	7.5	20G21NC022JA0NNNNN	3
30	33	45	15	22	33	45	11	20G21NC030JA0NNNNN	
37	40.7	55.5	18.5	30	45	55.5	15	20G21NC037JA0NNNNN	
43	47.3	64.5	22	37	55.5	66.6	18.5	20G21NC043JA0NNNNN	4
61	67.1	91.5	30	43	66	90	22	20G21NC061JA0NNNNN	
60	66	90	30	43	66	90	22	20G21NC060JA0NNNNN	5
72	79.2	108	37	60	90	108	30	20G21NC072JA0NNNNN	
86	94.6	129	45	72	108	129.6	37	20G21NC086JA0NNNNN	6
85	93.5	127.5	45	72	108	129.6	37	20G21NC085JA0NNNNN	
104	114.4	156	55	85	127.5	156	45	20G21NC104JA0NNNNN	7
140	154	210	75	104	156	210	55	20G2ANC140JA0NNNNN ⁽⁶⁾	
170	187	255	90	140	210	255	75	20G2ANC170JA0NNNNN ⁽⁶⁾	
205	225	307.5	110	170	255	307.5	90	20G2ANC205JA0NNNNN ⁽⁶⁾	
260	286	390	132	205	307.5	390	110	20G2ANC260JA0NNNNN ⁽⁶⁾	
302	332.2	453	160	260	390	468	132	20G2ANC302JA0NNNNN ⁽⁶⁾	7
367	403.5	550.5	200	302	453	550.5	160	20G2ANC367JA0NNNNN ⁽⁶⁾	
456	501.6	684	250	367	550.5	684	200	20G2ANC456JA0NNNNN ⁽⁶⁾	
477	524.7	715.5	270	367	550.5	684	200	20G2ANC477JA0NNNNN ⁽⁶⁾	

- (1) Frames 1...7 can be converted to IP20, NEMA/UL Type 1 with an optional conversion kit (20-750-TNEMA1-Fx), where x is the frame size of the drive.
- (2) Frames 2...7 IP20/IP00, NEMA/UL Type Open drives can be converted to a flange mount drive (back/heatsink: IP66, NEMA/UL Type 4X) with an optional user-installed flange-mount adapter kit (20-750-TFLNG1-Fx), where x is the frame size of the drive.
- (3) The 4th character determines corrosive gas protection; "2" = standard protection, and "E" = corrosive gas protection (XT).
- (4) The 5th character determines Input Type; "1" = AC input with precharge and DC terminals for frames 1...5, "4" = DC input with precharge for frames 5...7, and "A" = AC input with precharge and no DC terminals for frames 6 and 7. For DC input drives, see [DRIVES-S6001](#), the PowerFlex Common Bus Configuration Selection Guide.
- (5) The 11th character indicates the default Filtering and Common Mode Cap jumper configuration, All products ship with jumpers installed, code "J".
- (6) The 12th character determines whether an internal dynamic braking IGBT is included; "A" = Internal dynamic braking transistor installed, and "N" = No internal dynamic braking transistor.

380...400V AC, Three-phase Drives—IP54, NEMA/UL Type 12

Normal Duty				Heavy Duty				Cat. No. (1) (2) (3)	Frame Size
Output Amps			kW	Output Amps			kW		
Cont.	1 min	3 s		Cont.	1 min	3 s			
2.1	3.1	3.7	0.75	2.1	3.1	3.7	0.75	20G21GC2P1JA0NNNNN	2
3.5	5.2	6.3	1.5	3.5	5.2	6.3	1.5	20G21GC3P5JA0NNNNN	
5	7.5	9	2.2	5	7.5	9	2.2	20G21GC5P0JA0NNNNN	
8.7	13	15.6	4	8.7	13	15.6	4	20G21GC8P7JA0NNNNN	
11.5	17.2	20.7	5.5	11.5	17.2	20.7	5.5	20G21GC011JA0NNNNN	
15.4	16.9	23.1	7.5	11.5	17.3	23.1	5.5	20G21GC015JA0NNNNN	
22	24.2	33	11	15.4	24.3	33	7.5	20G21GC022JA0NNNNN	
30	33	45	15	22	33	45	11	20G21GC030JA0NNNNN	3
37	40.7	55.5	18.5	30	45	55.5	15	20G21GC037JA0NNNNN	
43	47.3	64.5	22	37	55.5	66.6	18.5	20G21GC043JA0NNNNN	
60	66	90	30	43	66	90	22	20G21GC060JA0NNNNN	4
73	80.3	109.5	37	60	90	108	30	20G21GC073JA0NNNNN	
72	79.2	108	37	60	90	108	30	20G21GC072JA0NNNNN	5
85	93.5	127.5	45	72	108	129.6	37	20G21GC085JA0NNNNN	
104	114.4	156	55	85	127.5	156	45	20G2AGC104JA0NNNNN ⁽⁴⁾	6
140	154	210	75	104	156	210	55	20G2AGC140JA0NNNNN ⁽⁴⁾	
170	187	255	90	140	210	255	75	20G2AGC170JA0NNNNN ⁽⁴⁾	
205	225	307.5	110	170	255	307.5	90	20G2AGC205JA0NNNNN ⁽⁴⁾	
260	286	390	132	205	307.5	390	110	20G2AGC260JA0NNNNN ⁽⁴⁾	7
302	332.2	453	160	260	390	468	132	20G2AGC302JA0NNNNN ⁽⁴⁾	
367	403.5	550.5	200	302	453	550.5	160	20G2AGC367JA0NNNNN ⁽⁴⁾	
456	501.6	684	250	367	550.5	684	200	20G2AGC456JA0NNNNN ⁽⁴⁾	

(1) The 4th character determines corrosive gas protection; "2" = standard protection, and "E" = corrosive gas protection (XT).

(2) The 5th character determines Input Type; "1" = AC input with precharge and DC terminals for frames 1...5, "4" = DC input with precharge for frames 5...7, and "A" = AC input with precharge and no DC terminals for frames 6 and 7. For DC input drives, see [DRIVES-SG001](#), the PowerFlex Common Bus Configuration Selection Guide.

(3) The 11th character indicates the default Filtering and Common Mode Cap jumper configuration. All products ship with jumpers installed, code "J".

(4) The 12th character determines whether an internal dynamic braking IGBT is included; "A" = Internal dynamic braking transistor installed, and "N" = No internal dynamic braking transistor.

380...400V AC, Three-phase Drives—Flange Mount (Front: IP20, NEMA/UL Type Open; Back/Heatsink: IP66, NEMA/UL Type 4X)

Normal Duty				Heavy Duty				Cat. No. (1) (2) (3)	Frame Size
Output Amps			kW	Output Amps			kW		
Cont.	1 min	3 s		Cont.	1 min	3 s			
2.1	3.1	3.7	0.75	2.1	3.1	3.7	0.75	20G21FC2P1JA0NNNNN	2
3.5	5.2	6.3	1.5	3.5	5.2	6.3	1.5	20G21FC3P5JA0NNNNN	
5	7.5	9	2.2	5	7.5	9	2.2	20G21FC5P0JA0NNNNN	
8.7	13	15.6	4	8.7	13	15.6	4	20G21FC8P7JA0NNNNN	
11.5	17.2	20.7	5.5	11.5	17.2	20.7	5.5	20G21FC011JA0NNNNN	
15.4	16.9	23.1	7.5	11.5	17.3	23.1	5.5	20G21FC015JA0NNNNN	
22	24.2	33	11	15.4	24.3	33	7.5	20G21FC022JA0NNNNN	
30	33	45	15	22	33	45	11	20G21FC030JA0NNNNN	3
37	40.7	55.5	18.5	30	45	55.5	15	20G21FC037JA0NNNNN	
43	47.3	64.5	22	37	55.5	66.6	18.5	20G21FC043JA0NNNNN	
60	66	90	30	43	66	90	22	20G21FC060JA0NNNNN	4
72	79.2	108	37	60	90	108	30	20G21FC072JA0NNNNN	
86	94.6	129	45	72	108	129.6	37	20G21FC086JA0NNNNN	
85	93.5	127.5	45	72	108	129.6	37	20G21FC085JA0NNNNN	5
104	114.4	156	55	85	127.5	156	45	20G21FC104JA0NNNNN	

- (1) The 4th character determines corrosive gas protection; "2" = standard protection, and "E" = corrosive gas protection (XT).
- (2) The 5th character determines Input Type; "1" = AC input with precharge and DC terminals for frames 1..5, "4" = DC input with precharge for frames 5..7, and "A" = AC input with precharge and no DC terminals for frames 6 and 7. For DC input drives, see [DRIVES-S6001](#), the PowerFlex Common Bus Configuration Selection Guide.
- (3) The 11th character indicates the default Filtering and Common Mode Cap jumper configuration, All products ship with jumpers installed, code "J".

Product Selection—480V PowerFlex 755TS Drives

480V AC, Three-phase Drives—IP00/IP20, NEMA/UL Type Open ^{(1) (2)}

Normal Duty			Heavy Duty				Cat. No. ^{(3) (4) (5)}	Frame Size	
Output Amps		Hp	Output Amps			Hp			
Cont.	1 min		3 s	Cont.	1 min				3 s
2.1	2.3	3.2	1	1.1	2.3	3.2	0.5	20G21RD2P1JAONNNNN	1
3.4	3.7	5.1	2	2.1	3.7	5.1	1	20G21RD3P4JAONNNNN	
5	5.5	7.5	3	3.4	5.5	7.5	2	20G21RD5P0JAONNNNN	
8	8.8	12	5	5	8.8	12	3	20G21RD8P0JAONNNNN	
11	12.1	16.5	7.5	8	12.1	16.5	5	20G21RD011JAONNNNN	
14	15.4	21	10	11	16.5	21	7.5	20G21RD014JAONNNNN	
2.1	3.1	3.7	1	1	3.1	3.7	1	20G21ND2P1JAONNNNN	2
3.4	5.1	6.1	2	3.4	5.1	6.1	2	20G21ND3P4JAONNNNN	
5	7.5	9	3	5	7.5	9	3	20G21ND5P0JAONNNNN	
8	12	14.4	5	8	12	14.4	5	20G21ND8P0JAONNNNN	
11	16.5	19.8	7.5	11	16.5	19.8	7.5	20G21ND011JAONNNNN	
14	15.4	21	10	11	16.5	21	7.5	20G21ND014JAONNNNN	
22	24.2	33	15	14	21	33	10	20G21ND022JAONNNNN	3
27	29.7	40.5	20	22	33	40.5	15	20G21ND027JAONNNNN	
34	37.4	51	25	27	40.5	51	20	20G21ND034JAONNNNN	
40	44	60	30	34	51	61.2	25	20G21ND040JAONNNNN	
53	58.3	79.5	40	40	60	78	30	20G21ND053JAONNNNN	
52	57.2	78	40	40	60	78	30	20G21ND052JAONNNNN	
65	71.5	97.5	50	52	78	97.5	40	20G21ND065JAONNNNN	4
78	85.8	117	60	65	97.5	117	50	20G21ND078JAONNNNN	
77	84.7	115.5	60	65	97.5	117	50	20G21ND077JAONNNNN	5
96	105.6	144	75	77	115.5	144	60	20G21ND096JAONNNNN	
125	137.5	187.5	100	96	144	187.5	75	20G2AND125JAONNNNN ⁽⁶⁾	6
156	171.6	234	125	125	187.5	234	100	20G2AND156JAONNNNN ⁽⁶⁾	
186	204.6	279	150	156	234	280.8	125	20G2AND186JAONNNNN ⁽⁶⁾	
248	272.8	372	200	186	279	372	150	20G2AND248JAONNNNN ⁽⁶⁾	
302	332.2	453	250	248	372	453	200	20G2AND302JAONNNNN ⁽⁶⁾	7
361	397.1	541.5	300	302	453	543.6	250	20G2AND361JAONNNNN ⁽⁶⁾	
415	456.5	622.5	350	361	541.5	649.8	300	20G2AND415JAONNNNN ⁽⁶⁾	
477	524.7	715.5	400	361	541.5	649.8	300	20G2AND477JAONNNNN ⁽⁶⁾	

(1) Frames 1...5 are IP20, NEMA/UL Type Open. Frames 6...7 are IP00, NEMA/UL Type Open. Frames 1...7 can be converted to IP20, NEMA/UL Type 1 with optional kit (20-750-NEMA1-Fx), where x is the frame size of the drive.

(2) Frames 2...7 IP20/IP00, NEMA/UL Type Open drives can be converted to a flange mount drive (back/heatsink: IP66, NEMA/UL Type 4X) with an optional user-installed flange-mount adapter kit (20-750-TFLNG1-Fx), where x is the frame size of the drive.

(3) The 4th character determines corrosive gas protection; "2" = standard protection, and "E" = corrosive gas protection (XT).

(4) The 5th character determines Input Type; "1" = AC input with precharge and DC terminals for frames 1...5, "4" = DC input with precharge for frames 5...7, and "A" = AC input with precharge and no DC terminals for frames 6 and 7. For DC input drives, see [DRIVES-SG001](#), the PowerFlex Common Bus Configuration Selection Guide.

(5) The 11th character indicates the default Filtering and Common Mode Cap jumper configuration. All products ship with jumpers installed, code "J".

(6) The 12th character determines whether an internal dynamic braking IGBT is included; "A" = Internal dynamic braking transistor installed, and "N" = No internal dynamic braking transistor.

480V AC, Three-phase Drives—IP54, NEMA/UL Type 12

Normal Duty				Heavy Duty				Cat. No. (1) (2) (3)	Frame Size
Output Amps			Hp	Output Amps			Hp		
Cont.	1 min	3 s		Cont.	1 min	3 s			
2.1	3.1	3.7	1	2.1	3.1	3.7	1	20G21GD2P1JA0NNNNN	2
3.4	5.1	6.1	2	3.4	5.1	6.1	1	20G21GD3P4JA0NNNNN	
5	5.5	7.5	3	3.4	5.1	6.1	2	20G21GD5P0JA0NNNNN	
8	12	14.4	5	8	12	14.4	5	20G21GD8P0JA0NNNNN	
11	16.5	19.8	7.5	11	16.5	19.8	7.5	20G21GD0T1JA0NNNNN	
14	15.4	21	10	11	16.5	21	7.5	20G21GD0T4JA0NNNNN	
22	24.2	33	15	14	21	33	10	20G21GD022JA0NNNNN	
27	29.7	40.5	20	22	33	40.5	15	20G21GD027JA0NNNNN	3
34	37.4	51	25	27	40.5	51	20	20G21GD034JA0NNNNN	
40	44	60	30	34	51	61.2	25	20G21GD040JA0NNNNN	
52	57.2	78	40	40	60	78	30	20G21GD052JA0NNNNN	4
66	72.5	99	50	52	78	97.5	40	20G21GD066JA0NNNNN	
65	71.5	97.5	50	52	78	97.5	40	20G21GD065JA0NNNNN	5
77	84.7	115.5	60	65	97.5	117	50	20G21GD077JA0NNNNN	
96	105.6	144	75	77	115.5	144	60	20G2AGD096JA0NNNNN ⁽⁴⁾	6
125	137.5	187.5	100	96	144	187.5	75	20G2AGD125JA0NNNNN ⁽⁴⁾	
156	171.6	234	125	125	187.5	234	100	20G2AGD156JA0NNNNN ⁽⁴⁾	
186	204.6	279	150	156	234	280.8	125	20G2AGD186JA0NNNNN ⁽⁴⁾	
248	272.8	372	200	186	279	372	150	20G2AGD248JA0NNNNN ⁽⁴⁾	7
302	332.2	453	250	248	372	453	200	20G2AGD302JA0NNNNN ⁽⁴⁾	
361	397.1	541.5	300	302	453	543.6	250	20G2AGD361JA0NNNNN ⁽⁴⁾	
415	456.5	622.5	350	361	541.5	649.8	300	20G2AGD415JA0NNNNN ⁽⁴⁾	

- (1) The 4th character determines corrosive gas protection; "2" = standard protection, and "E" = corrosive gas protection (XT).
- (2) The 5th character determines Input Type; "1" = AC input with precharge and DC terminals for frames 1..5, "4" = DC input with precharge for frames 5..7, and "A" = AC input with precharge and no DC terminals for frames 6 and 7. For DC input drives, see [DRIVES-SG001](#), the PowerFlex Common Bus Configuration Selection Guide.
- (3) The 11th character indicates the default Filtering and Common Mode Cap jumper configuration, All products ship with jumpers installed, code "J".
- (4) The 12th character determines whether an internal dynamic braking IGBT is included; "A" = Internal dynamic braking transistor installed, and "N" = No internal dynamic braking transistor.

480V AC, Three-phase Drives—Flange Mount (Front: IP20, NEMA/UL Type Open; Back/Heatsink: IP66, NEMA/UL Type 4X)

Normal Duty				Heavy Duty				Cat. No. (1) (2) (3)	Frame Size
Output Amps			Hp	Output Amps			Hp		
Cont.	1 min	3 s		Cont.	1 min	3 s			
2.1	3.1	3.7	1	2.1	3.1	3.7	1	20G21FD2P1JA0NNNNN	2
3.4	5.1	6.1	2	3.4	5.1	6.1	2	20G21FD3P4JA0NNNNN	
5	7.5	9	3	5	7.5	9	3	20G21FD5P0JA0NNNNN	
8	12	14.4	5	8	12	14.4	5	20G21FD8P0JA0NNNNN	
11	16.5	19.8	7.5	11	16.5	19.8	7.5	20G21FD011JA0NNNNN	
14	15.4	21	10	11	16.5	21	7.5	20G21FD014JA0NNNNN	
22	24.2	33	15	14	21	33	10	20G21FD022JA0NNNNN	
27	29.7	40.5	20	22	33	40.5	15	20G21FD027JA0NNNNN	3
34	37.4	51	25	27	40.5	51	20	20G21FD034JA0NNNNN	
40	44	60	30	34	51	61.2	25	20G21FD040JA0NNNNN	
52	57.2	78	40	40	60	78	30	20G21FD052JA0NNNNN	4
65	71.5	97.5	50	52	78	97.5	40	20G21FD065JA0NNNNN	
78	85.8	117	60	65	97.5	117	50	20G21FD078JA0NNNNN	
77	84.7	115.5	60	65	97.5	117	50	20G21FD077JA0NNNNN	5
96	105.6	144	75	77	115.5	144	60	20G21FD096JA0NNNNN	

(1) The 4th character determines corrosive gas protection; "2" = standard protection, and "E" = corrosive gas protection (XT).

(2) The 5th character determines Input Type; "1" = AC input with precharge and DC terminals for frames 1..5, "4" = DC input with precharge for frames 5..7, and "A" = AC input with precharge and no DC terminals for frames 6 and 7. For DC input drives, see [DRIVES-S6001](#), the PowerFlex Common Bus Configuration Selection Guide.

(3) The 11th character determines default Filtering and Common Mode Cap jumper configuration; "J" = Installed, and "A" = Removed.

Certifications and Specifications

This section provides information for certifications and specifications.

Certifications

Certification	Description
Product certifications	Rockwell Automation maintains current product certification information on its website at: rok.auto/certifications
CE	In conformity with these European Directives EMC Directive (2014/30/EU) EN 61800-3 Low Voltage Directive (2014/35/EU) EN 61800-5-1 ATEX Directive (2014/34/EU) EC-Type-Examination Certificate Number TÜV 12 ATEX 7990 X EN 50495
cULus	Listed to UL61800-5-1 and CSA C22.2 No. 274 up to 600V AC
EAC	Low Voltage TP TC 004/2011 EMC TP TC 020/2011
Ecodesign	Ecodesign Directive (2009/125/EC) as implemented by EU 2019/1781.
EMC	In conformity with EMC Directive (2014/30/EU).
Functional Safety	TÜV Rheinland – Certification applies to 20-750-S, 20-750-S1, 20-750-S3, and 20-750-S4 Safety Options when installed in drive. Standards applied EN 61800-3, EN 61508 PARTS 1-7 EN 61800-5-1, EN 62061 EN 61800-5-2, EN 60204-1 EN ISO 13849-1
KCC	R-R-RAA-Drive, R-R-RAA-750-M See the certificate of registration for specific drive catalog numbers that have this certification. ⁽¹⁾
Morocco	Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) NM EN 61800-5-1 Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) NM EN 61800-3
RCM	Australian Communications and Media Authority In conformity with the following items Radiocommunications Act: 1992 (including Amendments up to 2018) Radiocommunications (Electromagnetic Compatibility) Standard 2017 Radiocommunications Labeling (Electromagnetic Compatibility) Notice 2017 Standards applied EN 61800-3
SEMI F47	Certified compliant with the following standards SEMI F47 IEC 61000-4-34
UKCA	2016 No. 1101 Electrical Equipment (Safety) Regulations (LV) 2016 No. 1091 Electromagnetic Compatibility Regulations (EMC) 2012 No. 3032 Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations (RoHS)

(1) See the product certifications website, rok.auto/certifications, for declarations of conformity, certificates, and other certification details.

Environmental Specifications

Category	Specification																																																
Altitude Based on load Based on voltage	<p>See derating guidelines starting on page 21.</p> <p>Based on EN61800-5-1 (Electro-thermal Safety Standard for drives)</p> <table border="1"> <thead> <tr> <th>System and Ground Configuration</th> <th>Overvoltage Category ⁽³⁾</th> <th>Altitude Limit Above Sea Level [m (ft)] ⁽⁴⁾⁽⁵⁾</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>400/480V AC</td> </tr> <tr> <td rowspan="2">Center grounded (Y neutral) (TN or TT) ⁽¹⁾</td> <td>II (2)</td> <td>9000 (29,527.5) ⁽⁶⁾</td> </tr> <tr> <td>III (3)</td> <td>4800 (15,748.0)</td> </tr> <tr> <td rowspan="2">Ungrounded or impedance ground ⁽²⁾ (IT) ⁽¹⁾</td> <td>II (2)</td> <td>4800 (15,748.0)</td> </tr> <tr> <td>III (3)</td> <td>2000 (6,561.7)</td> </tr> <tr> <td rowspan="2">Corner grounded (TN or TT) ⁽²⁾</td> <td>II (2)</td> <td>4800 (15,748.0)</td> </tr> <tr> <td>III (3)</td> <td>2000 (6,561.7)</td> </tr> </tbody> </table> <p>(1) IEC Standard 60364-1 (2) Frame 1 drives do not support Category III ungrounded, impedance, or corner grounded distribution. (3) Category II (Isolation Transformer Level) - Typically two levels of isolation or protection from outdoor power lines. Category III (most common) Distribution Level Inside a Building - Typically one level of isolation or protection from outdoor power lines. (4) Excluding failure from cosmic radiation. Cosmic radiation increases rate of semiconductor malfunction at altitudes greater than 3000 m (9842.6 ft) above sea level. Concrete walls and ceilings or concrete walls and large bottles of water overhead are examples of ways to shield against cosmic radiation. (5) Frame 1 drives are limited to a maximum of 2000 m (6,561.7 ft) thermally. See Derating Guidelines on page 21. (6) Drive is limited to a maximum of 4800 m (15,748.0 ft) thermally. See Derating Guidelines on page 21.</p>	System and Ground Configuration	Overvoltage Category ⁽³⁾	Altitude Limit Above Sea Level [m (ft)] ⁽⁴⁾⁽⁵⁾			400/480V AC	Center grounded (Y neutral) (TN or TT) ⁽¹⁾	II (2)	9000 (29,527.5) ⁽⁶⁾	III (3)	4800 (15,748.0)	Ungrounded or impedance ground ⁽²⁾ (IT) ⁽¹⁾	II (2)	4800 (15,748.0)	III (3)	2000 (6,561.7)	Corner grounded (TN or TT) ⁽²⁾	II (2)	4800 (15,748.0)	III (3)	2000 (6,561.7)																											
System and Ground Configuration	Overvoltage Category ⁽³⁾	Altitude Limit Above Sea Level [m (ft)] ⁽⁴⁾⁽⁵⁾																																															
		400/480V AC																																															
Center grounded (Y neutral) (TN or TT) ⁽¹⁾	II (2)	9000 (29,527.5) ⁽⁶⁾																																															
	III (3)	4800 (15,748.0)																																															
Ungrounded or impedance ground ⁽²⁾ (IT) ⁽¹⁾	II (2)	4800 (15,748.0)																																															
	III (3)	2000 (6,561.7)																																															
Corner grounded (TN or TT) ⁽²⁾	II (2)	4800 (15,748.0)																																															
	III (3)	2000 (6,561.7)																																															
Corrosive atmosphere (Standard protection) IEC ISA	<p>Conformity with IEC 60721-3-3, 3C3 and 3S2, for components manufactured by Rockwell Automation. A suitable IP54, NEMA/UL Type 12 Cabinet is required to meet the 3S2 requirement.</p> <p>Harsh environments with a copper or silver reactivity level greater than 1000 angstroms per 30 days exposure are not allowed. No condensation is allowed. Maximum allowable humidity is 60% in the presence of corrosive gases. See ISA-71.04-2013 for details on how to measure reactivity levels on copper and silver test coupons.</p>																																																
Corrosive atmosphere (Corrosive gas protection) • ASTM B845-97 Method K Accelerated Test (30-day Exposure) • Rockwell Automation proprietary accelerated corrosion test for industries with sources of gaseous sulfur compounds, including tire and rubber	<p>Severity Level GX per ANSI/ISA 71.03-2013, Airborne contaminants-gases. Severity level GX is defined as up to 2100 angstroms of film growth per 30 days of copper or silver reactivity. Severity Level CX per IEC 60721-3-3: 2019, Chemically Active Substances. For the product to meet the corrosive atmosphere rating, these conditions must be met:</p> <ul style="list-style-type: none"> Protective covers must remain installed in unused connectors during storage and operation. The product or kit must be stored in the original packaging. 																																																
Surrounding Air Temperatures	<table border="1"> <thead> <tr> <th>Enclosure Rating</th> <th>Operating Range without Derating</th> <th>Maximum Operating Temperature with Derating ⁽¹⁾</th> <th>Frames</th> </tr> </thead> <tbody> <tr> <td colspan="4">Stand-alone/Wall-mount</td> </tr> <tr> <td>IP20, NEMA/UL Open Type</td> <td>-20...+50 °C (-4...+122 °F)</td> <td>60 °C (140 °F)</td> <td>1...5, All ratings</td> </tr> <tr> <td>IPO0, NEMA/UL Open Type</td> <td>-20...+50 °C (-4...+122 °F)</td> <td>60 °C (140 °F)</td> <td>6 and 7, All ratings</td> </tr> <tr> <td>IP20, NEMA/UL Type 1 (with hood)</td> <td>-20...+40 °C (-4...+104 °F)</td> <td>50 °C (104 °F)</td> <td>1...5, All ratings</td> </tr> <tr> <td>IP20, NEMA/UL Type 1 (with option kit)</td> <td>-20...+40 °C (-4...+104 °F)</td> <td>50 °C (104 °F)</td> <td>6 and 7, All ratings</td> </tr> <tr> <td>IP54, NEMA/UL Type 12</td> <td>-20...+40 °C (-4...+104 °F)</td> <td>50 °C (104 °F)</td> <td>2...5, All ratings</td> </tr> <tr> <td colspan="4">Flange mount – front</td> </tr> <tr> <td>IP20, NEMA/UL Open Type</td> <td>-20...+50 °C (-4...+122 °F)</td> <td>60 °C (140 °F)</td> <td>2...5, All ratings</td> </tr> <tr> <td>IPO0, NEMA/UL Open Type</td> <td>-20...+50 °C (-4...+122 °F)</td> <td>60 °C (140 °F)</td> <td>6 and 7, All ratings</td> </tr> <tr> <td colspan="4">Flange mount – back/heatsink</td> </tr> <tr> <td>IP66, NEMA/UL Type 4X</td> <td>-20...+40 °C (-4...+104 °F)</td> <td>50 °C (104 °F)</td> <td>2...5, All ratings ⁽²⁾</td> </tr> </tbody> </table> <p>(1) See temperature derating guidelines starting on page 43. (2) Product codes C061 and D053 are rated IP20, NEMA/UL Type 1 for the back/heatsink.</p>	Enclosure Rating	Operating Range without Derating	Maximum Operating Temperature with Derating ⁽¹⁾	Frames	Stand-alone/Wall-mount				IP20, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	1...5, All ratings	IPO0, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	6 and 7, All ratings	IP20, NEMA/UL Type 1 (with hood)	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	1...5, All ratings	IP20, NEMA/UL Type 1 (with option kit)	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	6 and 7, All ratings	IP54, NEMA/UL Type 12	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	2...5, All ratings	Flange mount – front				IP20, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	2...5, All ratings	IPO0, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	6 and 7, All ratings	Flange mount – back/heatsink				IP66, NEMA/UL Type 4X	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	2...5, All ratings ⁽²⁾
Enclosure Rating	Operating Range without Derating	Maximum Operating Temperature with Derating ⁽¹⁾	Frames																																														
Stand-alone/Wall-mount																																																	
IP20, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	1...5, All ratings																																														
IPO0, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	6 and 7, All ratings																																														
IP20, NEMA/UL Type 1 (with hood)	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	1...5, All ratings																																														
IP20, NEMA/UL Type 1 (with option kit)	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	6 and 7, All ratings																																														
IP54, NEMA/UL Type 12	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	2...5, All ratings																																														
Flange mount – front																																																	
IP20, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	2...5, All ratings																																														
IPO0, NEMA/UL Open Type	-20...+50 °C (-4...+122 °F)	60 °C (140 °F)	6 and 7, All ratings																																														
Flange mount – back/heatsink																																																	
IP66, NEMA/UL Type 4X	-20...+40 °C (-4...+104 °F)	50 °C (104 °F)	2...5, All ratings ⁽²⁾																																														
Storage temperature (all constructions)	-40...+70 °C (-40...+158 °F)																																																

Environmental Specifications (Continued)

Category	Specification			
UV radiation	The HIM and IP54, NEMA/UL Type 12 drive plastics are not UV rated.			
Relative humidity	5...95% noncondensing in environments with severity level G2 or below per ANSI/ISA 71-04-2013			
• Standard protection	5...60% noncondensing in environments with severity level G2 or above per ANSI/ISA 71-04-2013			
• Corrosive gas protection	5...95% noncondensing			
Shock – operating	Frames 1...6	15 g peak for 11 ms duration (±1.0 ms)		
	Frame 7	10 g peak for 11 ms duration (±1.0 ms)		
Shock – packaged for shipment	Frames 1 and 2	381 mm (15 in.) drop height		
	Frames 3 and 4	330 mm (13 in.) drop height		
	Frame 5	305 mm (12 in.) drop height		
	Frames 6 and 7	Meets International Safe Transit Association (ISTA) test procedure 2B		
Vibration – operating	Frames 1 and 2	1.000 mm (0.040 in.) displacement, 2 g peak		
	Frames 3...5	1.000 mm (0.040 in.) displacement, 1.5 g peak		
	Frames 6 and 7	1.000 mm (0.040 in.) displacement, 1 g peak		
Vibration – packaged for shipment, sinusoidal loose load	Frames 1...5	20.0 mm (0.8 in.) peak to peak, 2...5.186 Hz; 1.1 g peak from 5.186...20 Hz		
	Frames 6 and 7	Meets ISTA 2B packaging standards		
Vibration – packaged for shipment, random secured	Frames 1...5	Frequency (Hz)	PSD (g ² /Hz)	
		1	0.00005	
		4	0.01	
		16	0.01	
		40	0.001	
		80	0.001	
		200	0.00001	
	Frames 6 and 7	Meets International Safe Transit Association (ISTA) test procedure 2B.		
Required airflow	Frame	Total fan airflow	Frame	Total fan airflow
	1 and 2	84.95 m ³ /h (50 CFM)	5	883.49 m ³ /h (520 CFM)
	3	135.92 m ³ /h (80 CFM)	6	856.30 m ³ /h (504 CFM)
	4	543.68 m ³ /h (320 CFM)	7	1284.45 m ³ /h (756 CFM)
Sound	Frame	Sound level	Frame	Sound level
IMPORTANT: Sound pressure level is measured at 2 m (6.6 ft).	1 and 2	63 dB	5	77 dB
	3	64 dB	6	73 dB
	4	72 dB	7	74 dB
Surrounding environment pollution degree	All enclosures acceptable.			
Pollution Degree 1 and 2	Enclosure that meets or exceeds IP54, NEMA/UL Type 12 required.			
Pollution Degree 3 and 4	See page 73 for descriptions of each pollution degree rating.			

Technical Specifications

Category	Specification		
Protection		Motor Voltage	
		380/400V	
		480V	
	AC input overvoltage trip	576V AC	576V AC
	AC input undervoltage trip	250V AC	300V AC
	Bus overvoltage trip	815V DC	815V DC
	Bus undervoltage shutoff Frames 1...7	200V DC	200V DC
	Nominal bus voltage (full load)	540V DC	648V DC
	Drive overcurrent trip	200% of drive rated	
	Software overcurrent trip	100% of 3 s rating (158...210%)	
	Instantaneous current limit	143% of 3 s rating (215...287%)	
	Hardware overcurrent trip		
	Line transients	Up to 6000V peak per IEEE C62.41-1991	
	Control logic noise immunity	Showering arc transients up to 1500V peak	
Power ride-through	15 ms at full load		
Logic control ride-through	0.5 s min, 2 s typical		
Ground fault trip	Phase-to-ground on drive output		
Short circuit trip	Phase-to-phase on drive output		
Electrical	AC input voltage tolerance	See Input Voltage Tolerance on page 19 for full power and operating range.	
	Frequency tolerance	47...63 Hz	
	Input phases	Three-phase input provides full rating for all drives. For single-phase operation, see Single-Phase Drive Ratings on page 18 for rated current at 25 °C (77 °F) surrounding air temperature.	
	DC input voltage tolerance	±10% of nominal bus voltage (see Nominal bus voltage (full load) on page 15)	
	Displacement power factor	0.98 across entire speed range	
	DC link impedance	≤ 4%	
	Efficiency	97.5% at rated amps, nominal line volts	
	Maximum short circuit rating	100,000 A RMS symmetrical	
	Actual short circuit rating	Determined by AIC rating of installed fuse/circuit breaker.	
	Drive to motor power ratio		
	Min	Recommended not less than 1:2 ratio	
	Max	Recommended not greater than 2:1 ratio	
	Brake IGBT rating	100% of motor-rated torque	
	Control POD current draw	5 A	
	Digital inputs	DC	AC
	Nominal	24V DC	120V AC
	Maximum	30V DC	132V AC
High state	20...24V DC	100...132V AC	
Low state	0...5V DC	0...30V AC	
PTC inputs	22-Series I/O option module	ATEX option module for 11-Series I/O option module	
Standard	DIN 44082	IEC 6094-8	
Trip resistance	3.1 kΩ	3.2 kΩ	
Nominal resistance	1.8 kΩ	1.6 kΩ	
Reset resistance	2.2 kΩ	N/A ⁽¹⁾	
Short circuit trip resistance	80 Ω	100 Ω	
	(1) No hysteresis, fault is latched.		

Technical Specifications (Continued)

Category	Specification		
Control	Method	Sine coded PWM with programmable carrier frequency. Ratings apply to all drives.	
	Carrier frequency	Default settings Frames 1...3 4 kHz Frames 4...7 2 kHz Settings Frames 1...6 2, 4, 8, and 12 kHz Frame 7 2, 4, and 8 kHz	
	Output voltage range	0 to rated motor voltage	
	Output frequency range	0...325 Hz at 2 kHz carrier 0...590 Hz at 4 kHz carrier	
	Frequency accuracy Digital input Analog input	Within $\pm 0.01\%$ of set output frequency Within $\pm 0.4\%$ of maximum output frequency	
	Frequency control	Speed regulation – with slip compensation (V/Hz and Sensorless Vector modes) 0.5% of base speed across 40:1 speed range, 40:1 operating range	
	Speed control	Without feedback (Flux Vector mode), 0.1% of base speed across 120:1 speed range, 120:1 operating range	
		With feedback (Flux Vector mode), 0.001% of base speed across 120:1 speed range, 1000:1 operating range	
	Torque accuracy	1.2% motor rated torque with encoder feedback and optional torque accuracy module, Cat. No. 20-750-TSTAM-CD-XT	
	Selectable motor control	<ul style="list-style-type: none"> Flux vector (with and without encoder feedback) for induction motors, surface permanent magnet (SPM) motors, and Interior permanent magnet (IPM) motors. Sensorless vector for induction motors, permanent magnet motors (both IPM and SPM), and synchronous reluctance motors. Volts per hertz for induction motors, permanent magnet motors (both IPM and SPM), and synchronous reluctance motors. Economizer for induction motors. 	
	Stop modes	Multiple programmable stop modes including: Ramp, Coast, DC-Brake, Ramp-to-Hold, Fast Braking, and Current Limit Stop.	
	Accel/Decel	Two independently programmable accel and decel times. Each time can be programmed from 0...3600 seconds in 0.1 second increments (0 to motor nameplate speed).	
	S-curve time	Adjustable from 0...100% of ramp time (normal duty rating)	
	Intermittent overload	Normal duty	110% overload capability for up to 1 minute out of 10 minutes 150% overload capability for up to 3 seconds out of 60 seconds
		Heavy duty	150% overload capability for up to 1 minute out of 10 minutes 180% overload capability for up to 3 seconds out of 60 seconds
Current limit capability	Proactive current limit programmable from 20...160% of rated output current. Independently programmable proportional and integral gain.		
Electronic motor overload protection	Class 1 to class 60 motor overload protection according to NEC article 430 and motor over-temperature protection according to NEC article 430.126 (A)(2). UL File E59272.		

RF Emission Compliance and Installation Requirements

PowerFlex 755TS 400V/480V Input Drives

Drive Frame Catalog Number	EN 61800-3 Category C3 ^{(1) (2)} (I ≤ 100 A) CISPR11 Group 1 Class A (Input Power > 20 kVA)	EN 61800-3 Category C3 ^{(1) (2)} I > 100 A
Frame 1 20G...C2P1 thru 20G...C015 20G...D2P1 thru 20G...D014	150m (492.1 ft) motor cable limit with no filter. Requires installation of the supplied C3 bracket to ground the motor cable shield.	N/A
Frame 2 20G...C2P1 thru 20G...C022 20G...D2P1 thru 20G...D022	150m (492.1 ft) motor cable limit with no filter. Requires using the factory installed C3 bracket to ground the motor cable shield.	N/A
Frame 3 20G...C030 thru 20G...C061 20G...D027 thru 20G...D053	150m (492.1 ft) motor cable limit with no filter. Requires using the factory installed C3 bracket to ground the motor cable shield.	N/A
Frame 4 20G...C060 thru 20G...C086 20G...D052 thru 20G...D078	150m (492.1 ft) motor cable limit with no filter. Requires using the factory installed C3 bracket to ground the motor cable shield.	N/A
Frame 5 20G...C085 thru 20G...C104 20G...D077 thru 20G...D096	150m (492.1 ft) motor cable limit with no filter. Requires using the factory installed C3 bracket to ground the motor cable shield.	150m (492.1 ft) motor cable limit with no filter. Requires using the factory installed C3 bracket to ground the motor cable shield.
Frame 6 20G...C104 thru 20G...C260 20G...D125 thru 20G...D248	150m (492.1 ft) motor cable limit with no filter. Requires a 20-750-EMC6-F6 EMC C3 option kit or other means of shield termination within the installation.	150m (492.1 ft) motor cable limit with no filter. Requires a 20-750-EMC6-F6 EMC C3 option kit or other means of shield termination within the installation.
Frame 7 20G...C302 thru 20G...C477 20G...D302 thru 20G...D477	N/A	150m (492.1 ft) motor cable limit with no filter. Requires a 20-750-EMC6-F7 EMC C3 option kit or other means of shield termination within the installation.

(1) Intended to be powered from an industrial power network that is supplied by a dedicated power transformer or generator and not from LV power lines that supply other customers.

(2) See the PowerFlex 755TS Products with TotalFORCE Control Installation Instructions, publication [750-IN119](#) for shield termination requirements.

Single-Phase Drive Ratings

400V AC Input Single-Phase Ratings at 25 °C (77 °F) Surrounding Air Temperature

Drive		Without AC Line Reactor			With AC Line Reactor			AC Line Reactor
Frame	Cat. No.	Output Power [kW]	Output Current [A]	Input Current [A]	Output Power [kW]	Output Current [A]	Input Current [A]	Cat. No.
1	20G...C2P1	0.18	0.6	1.1	0.18	0.6	1	1321-3R2-B
1,2	20G...C2P1	0.37	1	1.8	0.37	1	1.6	1321-3R2-B
1,2	20G...C3P5	0.75	1.7	3.1	0.75	1.7	2.8	1321-3R4-D
1,2	20G...C5P0	1.1	2.5	4.6	1.1	2.5	4.1	1321-3R8-D
1,2	20G...C8P7	2	4.3	7.9	2	4.3	7	1321-3R12-C
1,2	20G...C011	2.75	5.7	10.5	2.75	5.7	9.3	1321-3R12-C
1,2	20G...C015	4	8.7	16	4	8.7	14.1	1321-3R18-C
2	20G...C021	5.5	11.5	21	5.5	11.5	18.8	1321-3R25-C
3	20G...C030	7.5	15.4	28	7.5	15.4	25.3	1321-3R25-C
3	20G...C037	9.25	18.5	33	9.25	18.5	30.5	1321-3R35-C
3	20G...C043	11	22	40	11	22	36.0	1321-3R45-C
3	20G...C061	15	30	54	15	30	50.0	1321-3R55-C
4	20G...C060							
4	20G...C072	18.5	37	67	18.5	37	62.0	1321-3R80-C
4	20G...C086	22	43	80	22	43	72.0	1321-3R80-C
5	20G...C085							
5	20G...C104	30	60	111	30	60	101.5	1321-3R100-C
6	20G...C140	37	72	133	37	72	121.8	1321-3R130-C
6	20G...C170	45	85	157	45	85	143.8	1321-3R160-C
6	20G...C205	55	104	192	55	104	176.6	1321-3R200-C
6	20G...C260	55	104	192	55	104	176.6	1321-3R200-C
7	20G...C302	75	140	261	75	140	236.9	1321-3R320-C
7	20G...C367	90	170	317	90	170	287.9	1321-3R320-C
7	20G...C456	110	205	383	110	205	349.7	1321-3R400-C
7	20G...C477	110	205	383	132	260	443.5	1321-3R500-C

480V AC Input Single-Phase Ratings at 25 °C (77 °F) Surrounding Air Temperature

Drive		Without AC Line Reactor			With AC Line Reactor			AC Line Reactor
Frame	Cat. No.	Output Power [Hp]	Output Current [A]	Input Current [A]	Output Power [Hp]	Output Current [A]	Input Current [A]	Cat. No.
1	20G...D2P1	0.25	0.5	1	0.25	0.5	0.8	1321-3R2-B
1,2	20G...D2P1	0.5	1.1	2.1	0.5	1.1	1.8	1321-3R4-D
1,2	20G...D3P4	1	1.7	3.2	1	1.7	2.8	1321-3R4-D
1,2	20G...D5P0	1.5	2.5	4.7	1.5	2.5	4.1	1321-3R8-D
1,2	20G...D8P0	2.5	4	7.5	2.5	4	6.5	1321-3R12-C
1,2	20G...D011	3.75	5.5	10.3	3.75	5.5	8.9	1321-3R12-C
1,2	20G...D014	5	8	15	5	8	13	1321-3R18-C
2	20G...D022	7.5	11	20	7.5	11	18	1321-3R25-C
3	20G...D027	10	14	25	10	14	23	1321-3R25-C
3	20G...D034	12.5	17	31	12.5	17	28	1321-3R35-C
3	20G...D040	15	22	40	15	22	36	1321-3R45-C
3	20G...D053	20	27	49	20	27	45	1321-3R55-C
4	20G...D052							
4	20G...D065	25	34	62	25	34	57	1321-3R80-C
4	20G...D078	30	40	75	30	40	67	1321-3R80-C
5	20G...D077							
5	20G...D096	40	52	97	40	52	88	1321-3R100-C
6	20G...D125	50	65	121	50	65	110	1321-3R130-C
6	20G...D156	60	78	146	60	78	132	1321-3R160-C
6	20G...D186	75	96	179	75	96	163	1321-3R200-C
6	20G...D248	75	96	179	75	96	163	1321-3R200-C
7	20G...D302	125	156	291	125	156	264	1321-3R320-C
7	20G...D361	150	186	347	150	186	315	1321-3R320-C
7	20G...D415	150	186	347	200	248	423	1321-3R500-C
7	20G...D477	150	186	347	200	248	423	1321-3R500-C

Design Considerations


This section provides information for design considerations.

Input Voltage Tolerance

Drive Rating	Nominal Line Voltage	Nominal Motor Voltage	Drive Full Power Range	Drive Operating Range
380...480	380	361	380...528	342...528
	400	380	400...528	
	480	460	460...528	

Drive Full Power Range = Nominal Motor Voltage to Nominal Line Voltage + 10%.
Rated current is available across the entire Drive Full Power Range


Drive Operating Range = Nominal Line Voltage - 10% to Drive Rated Voltage + 10%. Drive Output is linearly derated when Actual Line Voltage is less than the Nominal Motor Voltage

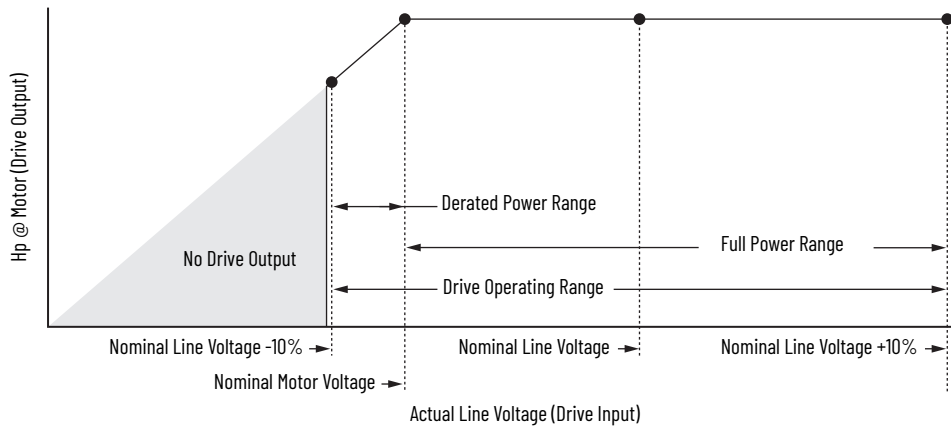

EXAMPLE Calculate the maximum power of a 5.0 Hp, 460V motor connected to a 480V-rated drive supplied with 342V Actual Line Voltage input.

- Actual Line Voltage / Nominal Motor Voltage = 74.3%
- 74.3% x 5.0 Hp = 3.7 Hp
- 74.3% x 60 Hz = 44.6 Hz

At 342V Actual Line Voltage, the maximum power the 5.0 Hp, 460V motor can produce is 3.7 Hp at 44.6 Hz.

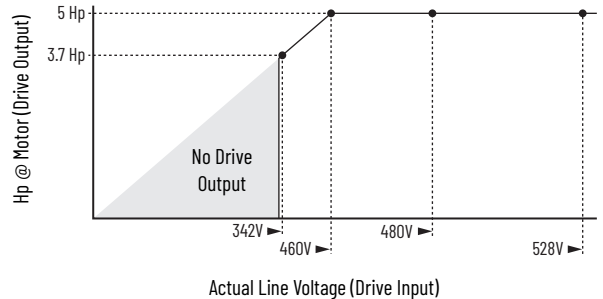

Approximate Watts Loss

The following table lists watts loss data for PowerFlex 755TS drives running at full load, full speed, and default carrier frequency.

Internal watts are the watts that the control structure of the drive dissipates into the cabinet, regardless of mounting style. External watts are the watts that are dissipated directly through the heatsink and are outside the cabinet for flange mount, and inside the cabinet for other mounting types.

Watts Loss for 400/480V Drives

Cat. No. (1)	Normal Duty		Frame	External Watts	Internal Watts	Total Watts	Cat. No. (1)	Normal Duty		Frame	External Watts	Internal Watts	Total Watts
	kW	Continuous Output Amps						Hp	Continuous Output Amps				
400 Volt							480 Volt						
20G...C2P1	0.75	2.1	2 (1)	16 (16)	55 (56)	71 (72)	20G...D2P1	1.0	2.1	2 (1)	17 (21)	60 (61)	77 (82)
20G...C3P5	1.5	3.5	2 (1)	26 (33)	57 (60)	83 (93)	20G...D3P4	2.0	3.4	2 (1)	27 (39)	61 (64)	88 (103)
20G...C5P0	2.2	5	2 (1)	39 (44)	58 (62)	97 (106)	20G...D5P0	3.0	5	2 (1)	41 (54)	63 (67)	104 (121)
20G...C8P7	4.0	8.7	2 (1)	75 (79)	64 (80)	139 (159)	20G...D8P0	5.0	8	2 (1)	71 (91)	68 (82)	139 (173)
20G...C011	5.5	11.5	2 (1)	108 (107)	70 (80)	178 (187)	20G...D011	7.5	11	2 (1)	108 (118)	74 (88)	182 (206)
20G...C015	7.5	15.4	2 (1)	161 (166)	80 (80)	241 (246)	20G...D014	10	14	2 (1)	149 (152)	81 (81)	230 (233)
20G...C022	11	22	2	225	86	311	20G...D022	15	22	2	237	91	328
20G...C030	15	30	3	300	103	403	20G...D027	20	27	3	273	101	374
20G...C037	18.5	37	3	362	115	477	20G...D034	25	34	3	368	115	483
20G...C043	22	43	3	505	126	631	20G...D040	30	40	3	503	126	629
20G...C060	30	60	4	540	152	692	20G...D052	40	52	4	455	135	590
20G...C061	30	61	3	619	158	777	20G...D053	40	53	3	537	142	679
20G...C072	37	72	5 (4)	549 (615)	162 (151)	711 (766)	20G...D065	50	65	5 (4)	502 (559)	155 (148)	657 (707)
20G...C073	37	73	4	487	134	621	20G...D066	50	66	4	422	129	551
20G...C085	45	85	5	705	166	871	20G...D077	60	77	5	646	162	808
20G...C086	45	86	4	661	177	838	20G...D078	60	78	4	596	162	758
20G...C104	55	104	6 (5)	825 (928)	261 (205)	1086 (1133)	20G...D096	75	96	6 (5)	781 (855)	248 (193)	1029 (1048)
20G...C140	75	140	6	1239	329	1568	20G...D125	100	125	6	1109	309	1418
20G...C170	90	170	6	1381	310	1691	20G...D156	125	156	6	1299	304	1603
20G...C205	110	205	6	1893	391	2284	20G...D186	150	186	6	1718	368	2086
20G...C260	132	260	7 (6)	2061 (2449)	437 (512)	2498 (2961)	20G...D248	200	248	7 (6)	2058 (2384)	464 (501)	2522 (2885)
20G...C302	160	302	7	2566	471	3037	20G...D302	250	302	7	2704	501	3205
20G...C367	200	367	7	3322	596	3918	20G...D361	300	361	7	3409	616	4025
20G...C456	250	456	7	3472	765	4237	20G...D415	350	415	7	3232	693	3925
20G...C477	270	477	7	3647	808	4455	20G...D477	400	477	7	3823	822	4645

(1) Select the watts loss based on the catalog number.


Derating Guidelines

The following sections describe conditional derating guidelines.


Low Frequency Derating—400V

The following graphs show the low frequency deratings for 400V PowerFlex 755TS drives.


Low Frequency Derating Curves—400V AC Frames 1...7

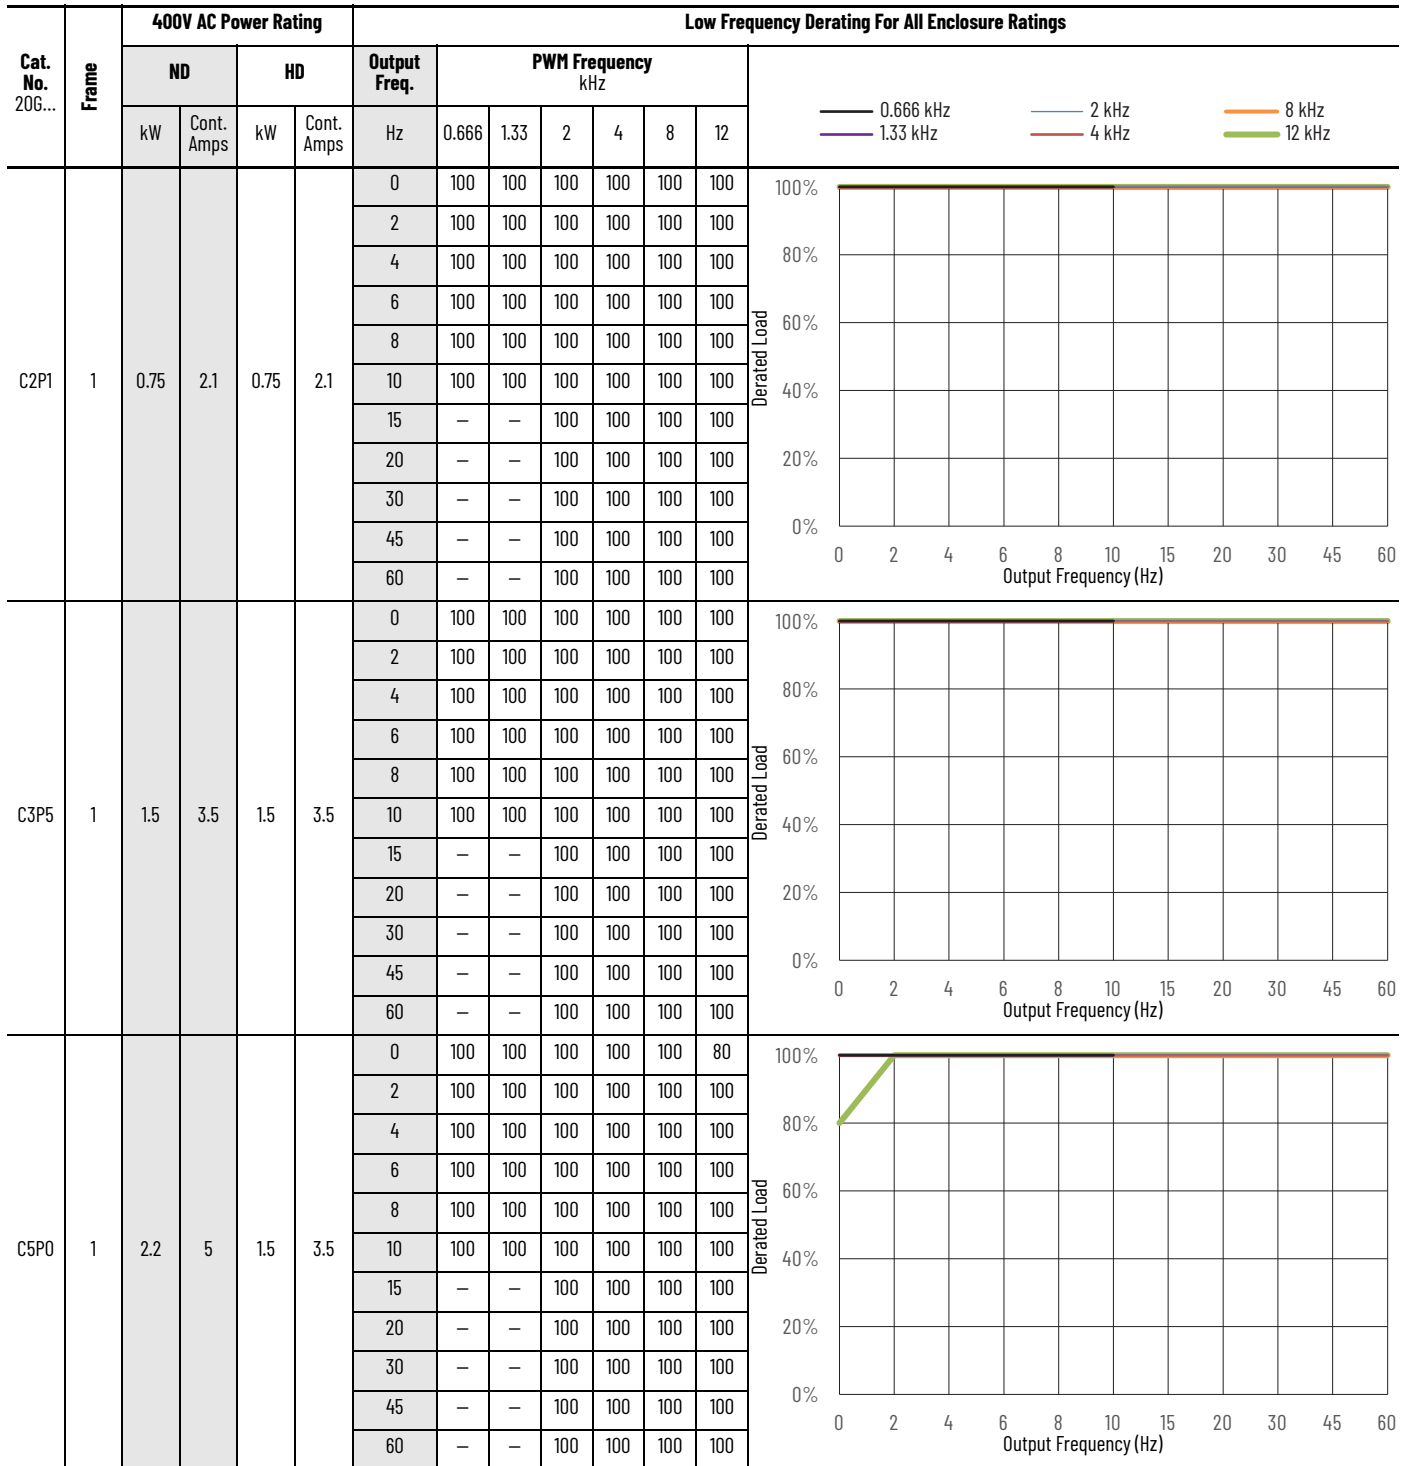


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

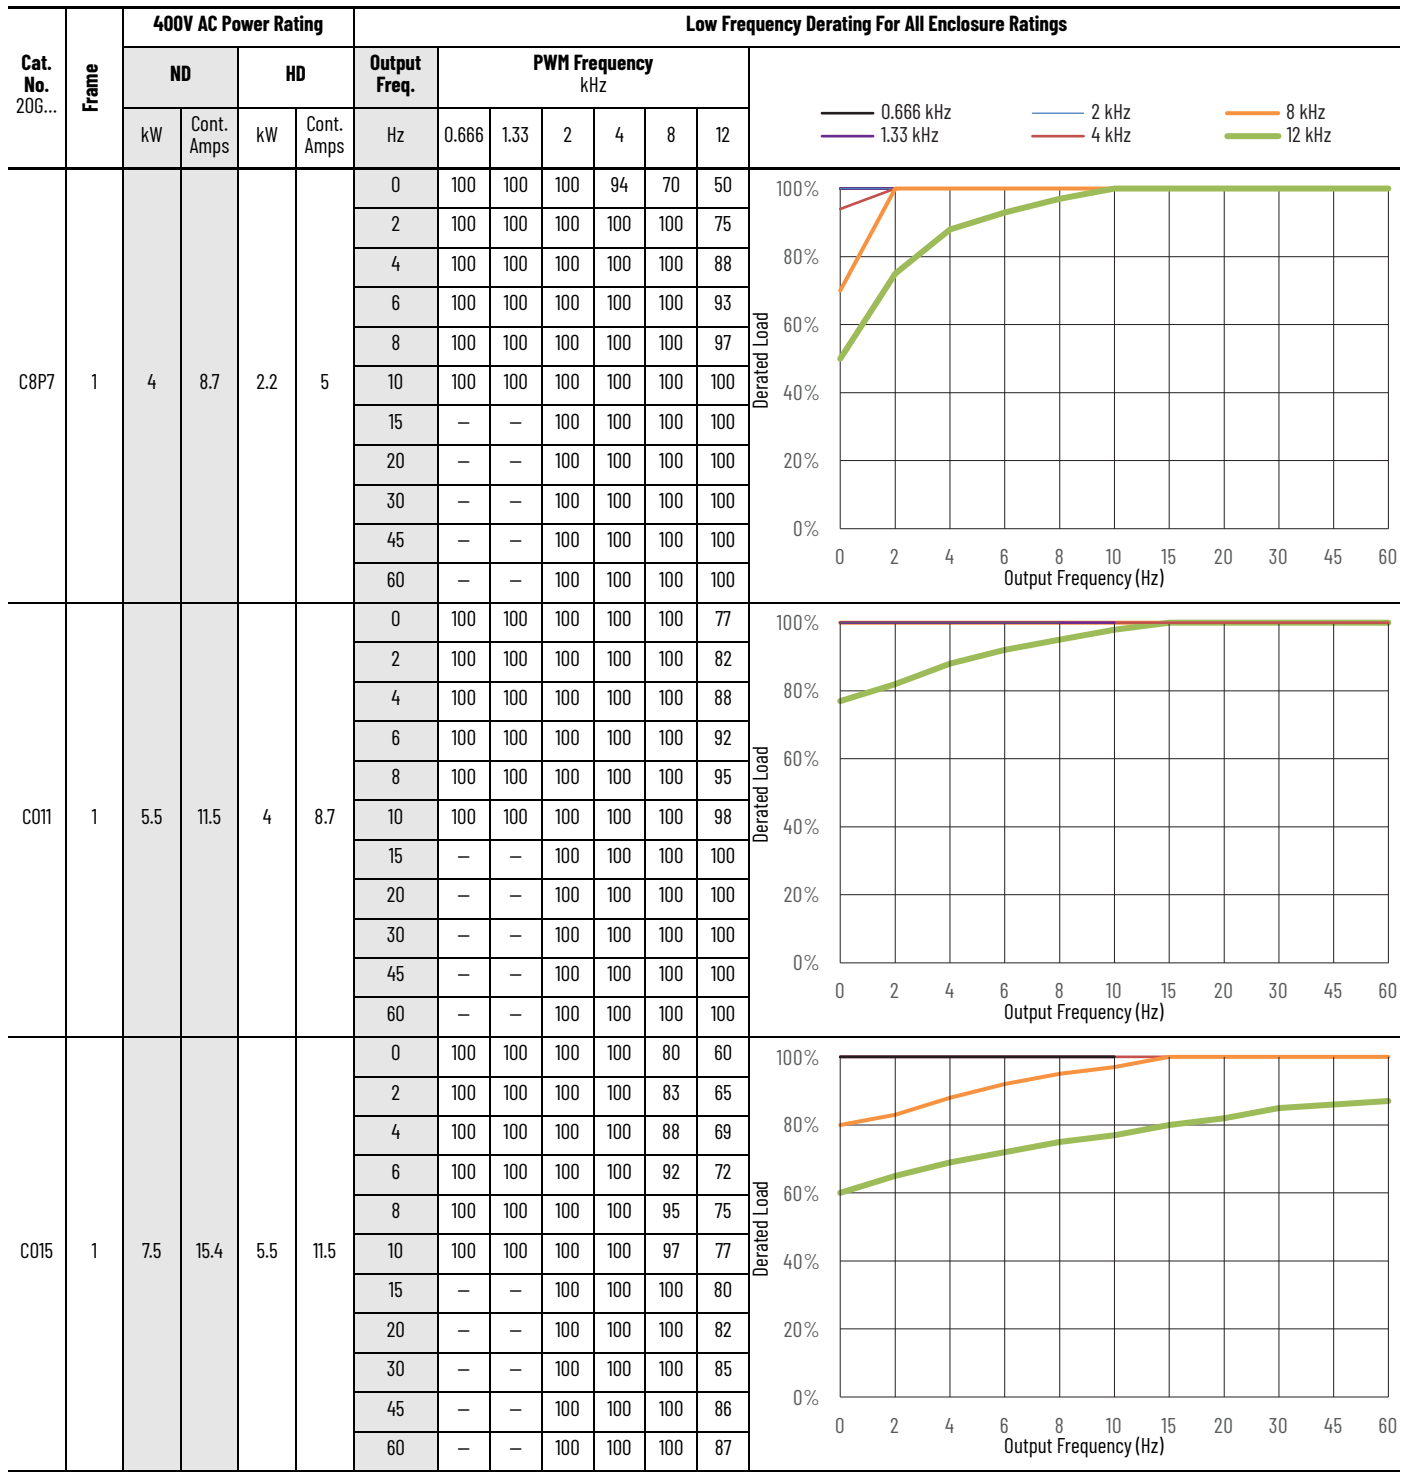


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

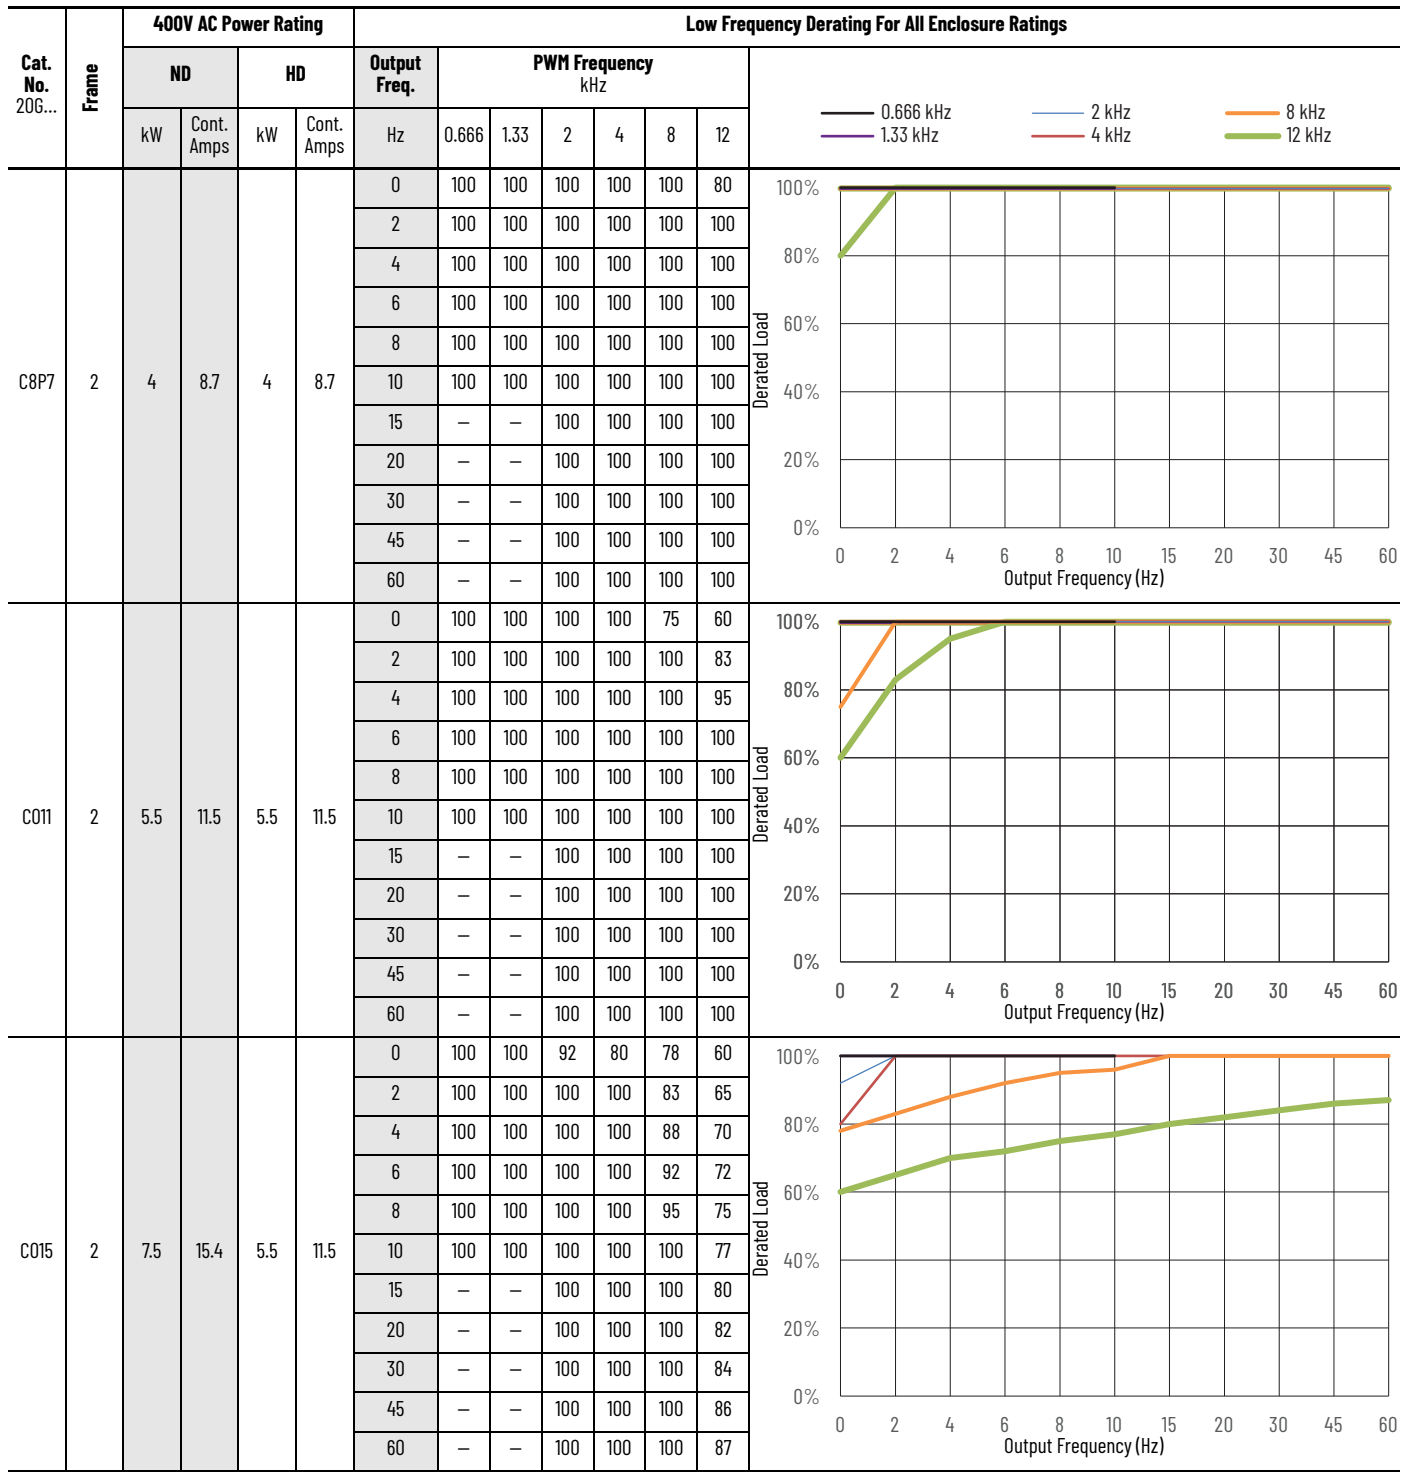


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

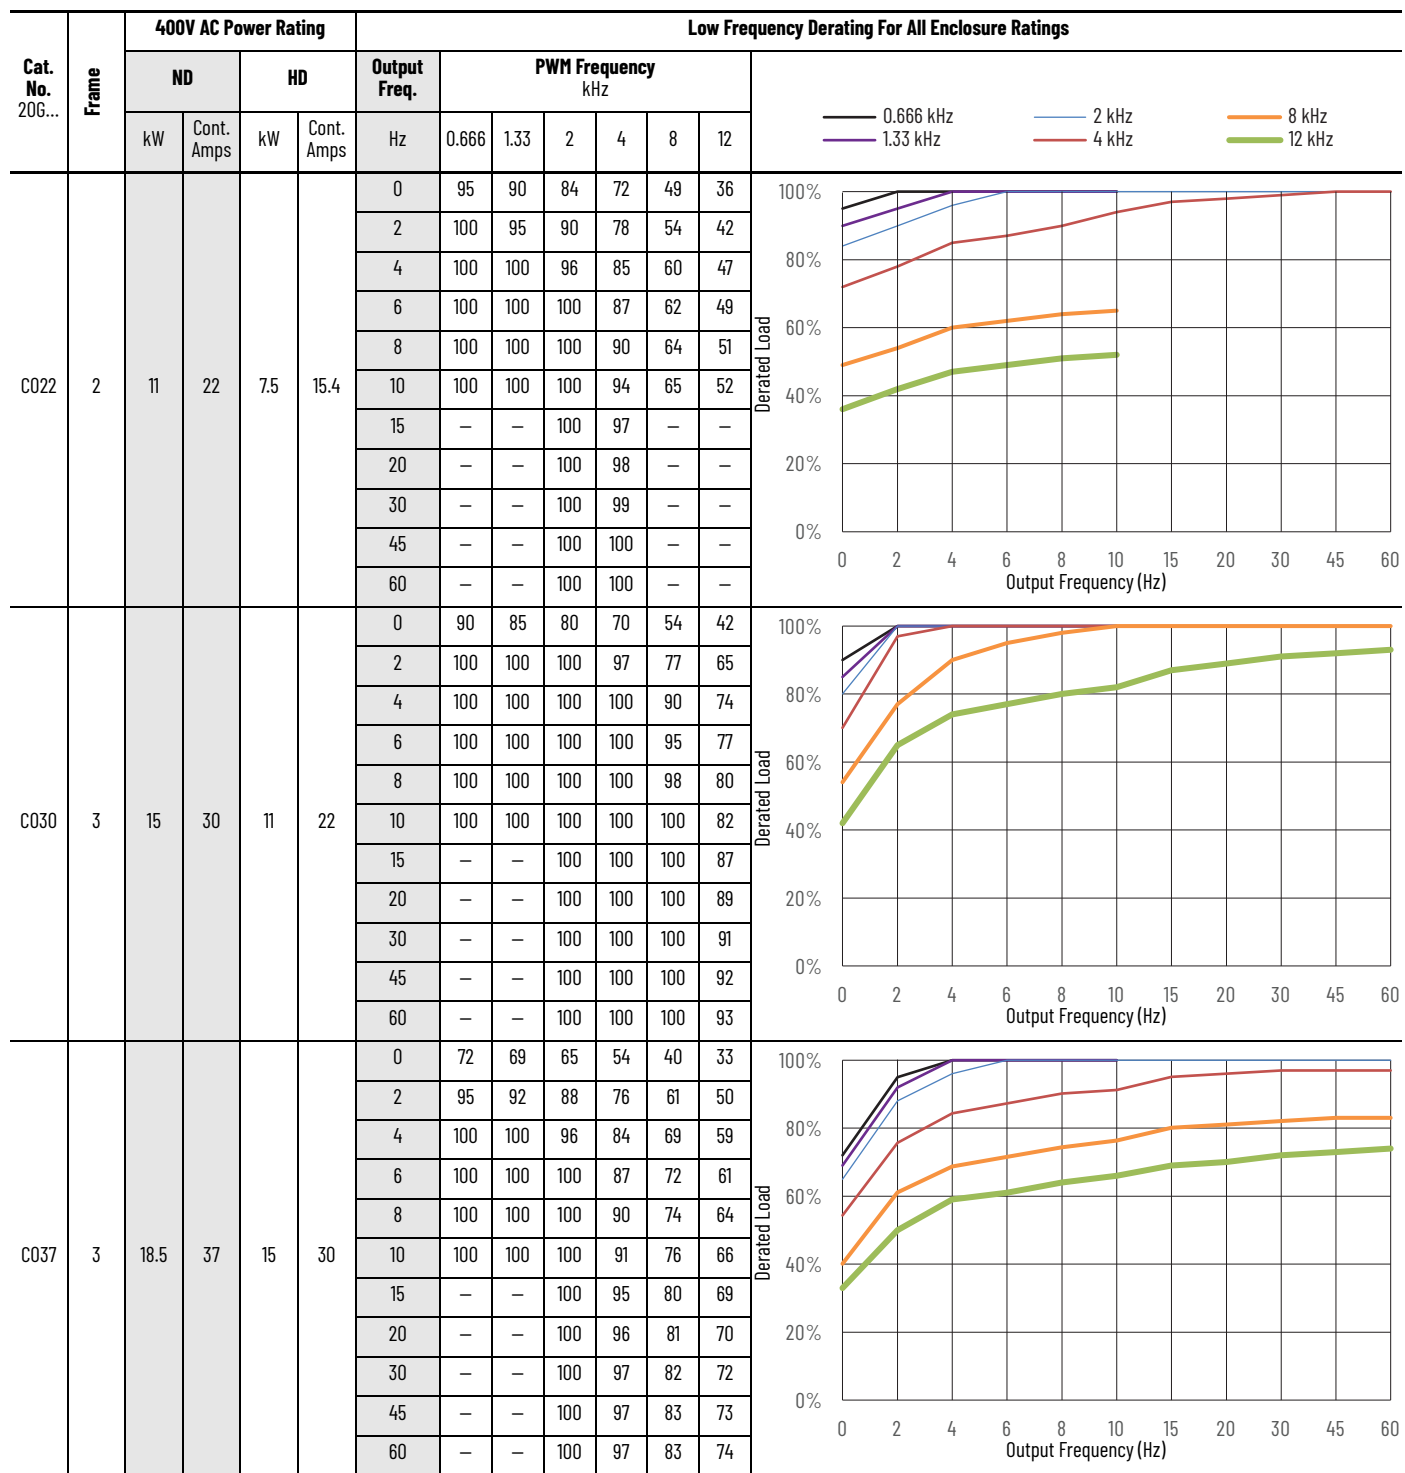


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

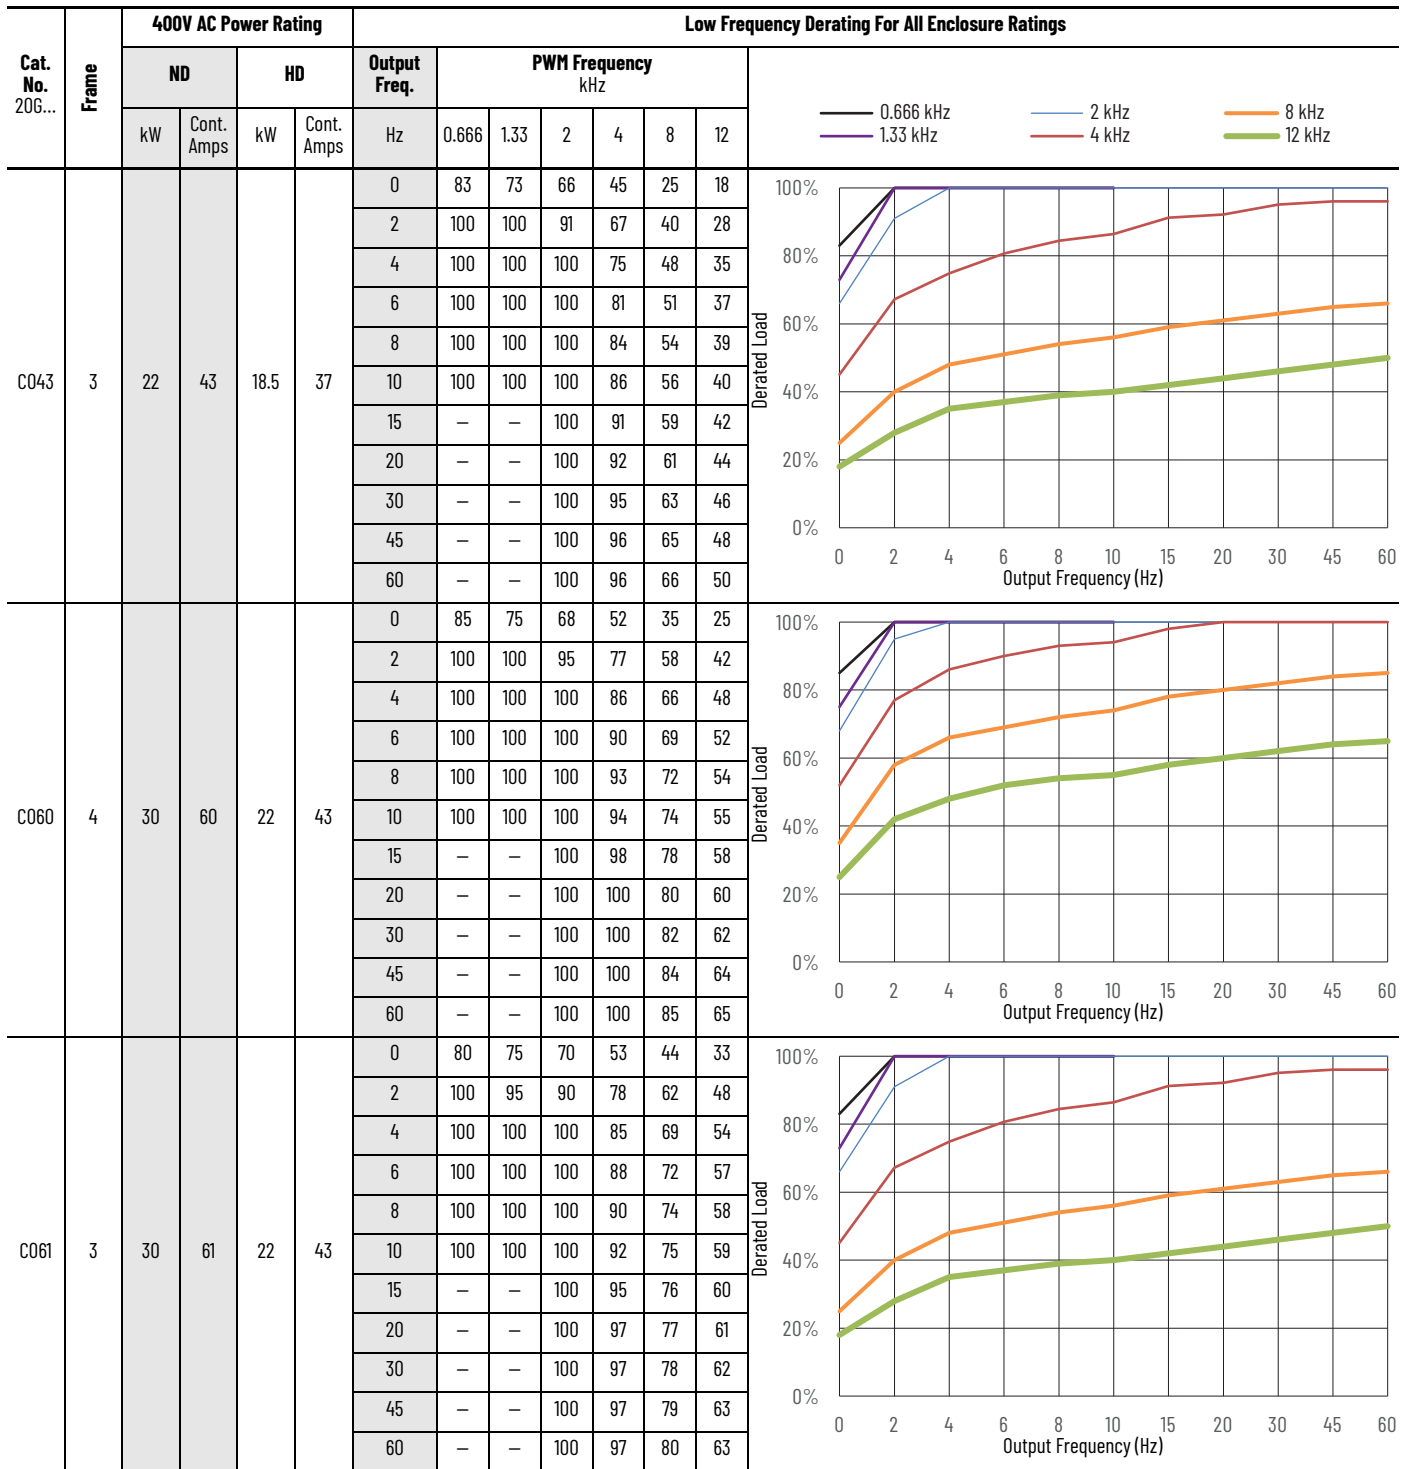

Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

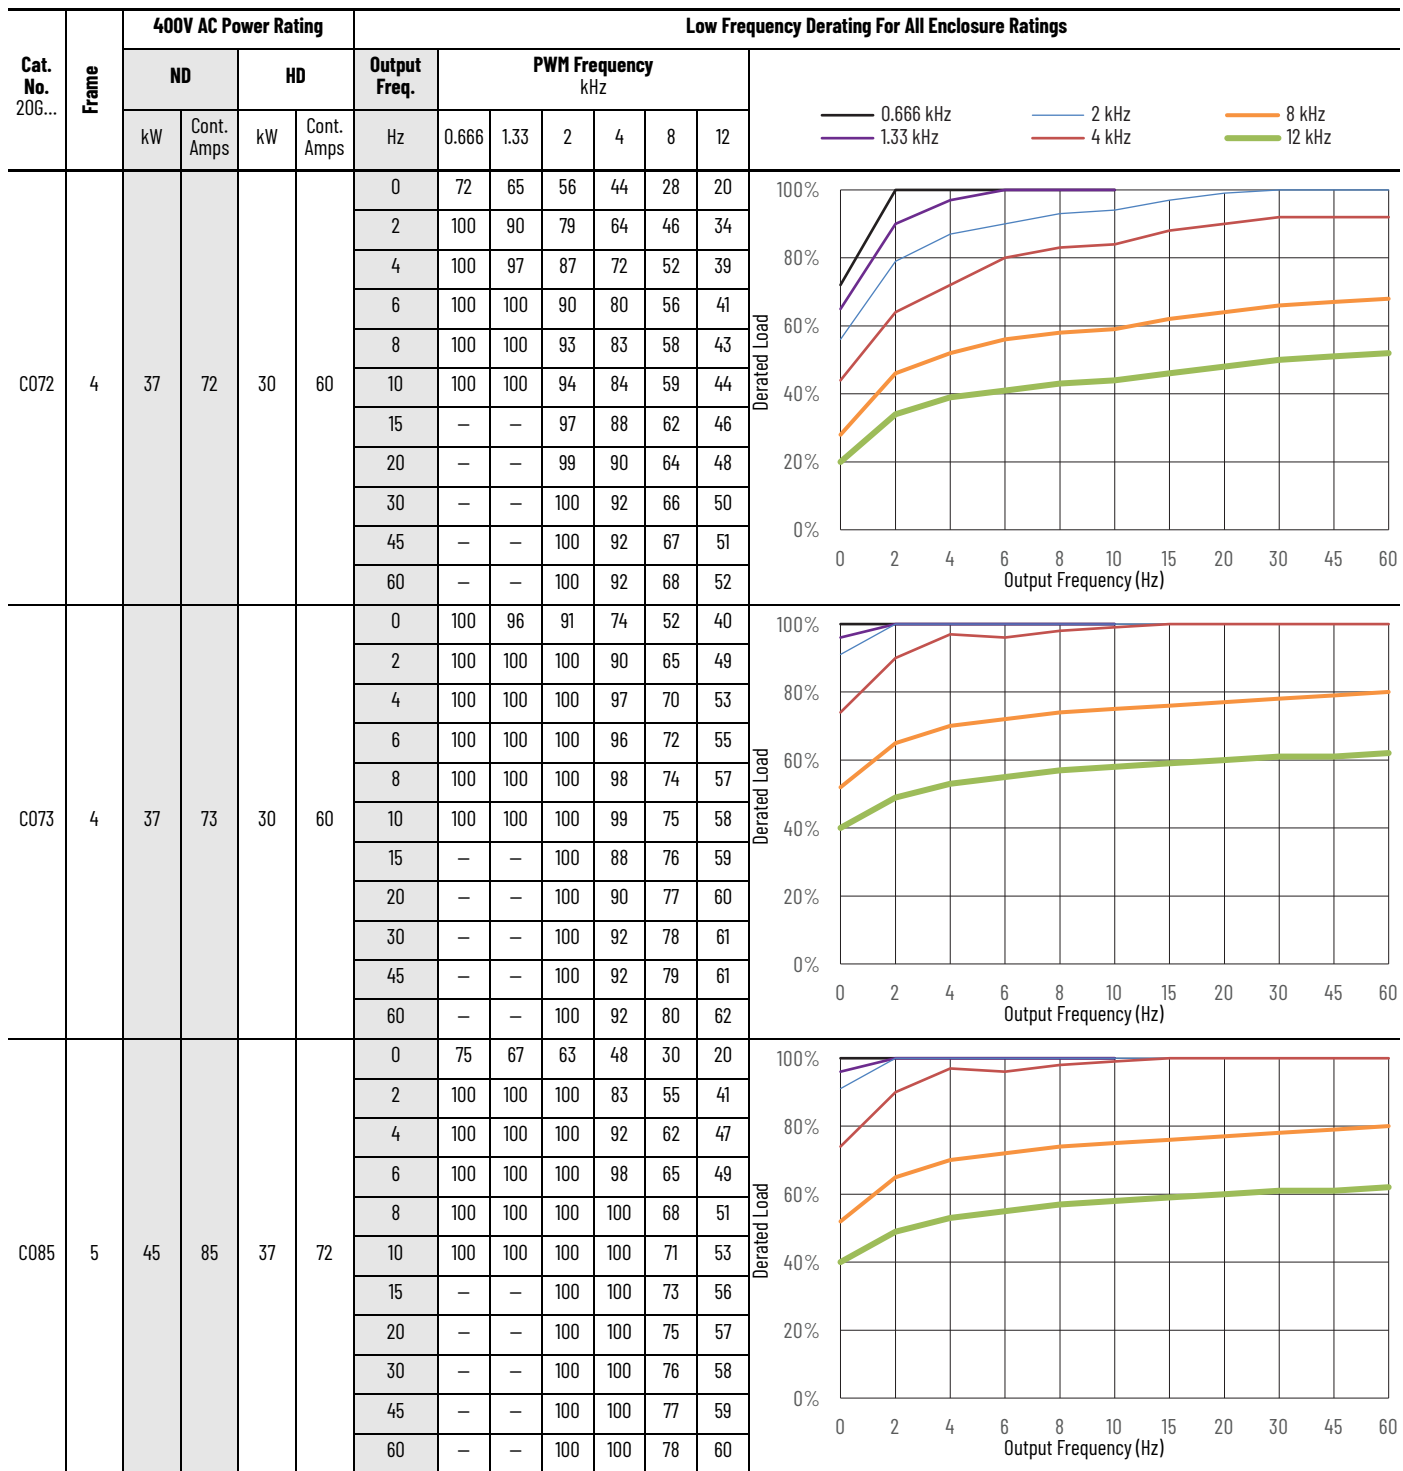


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

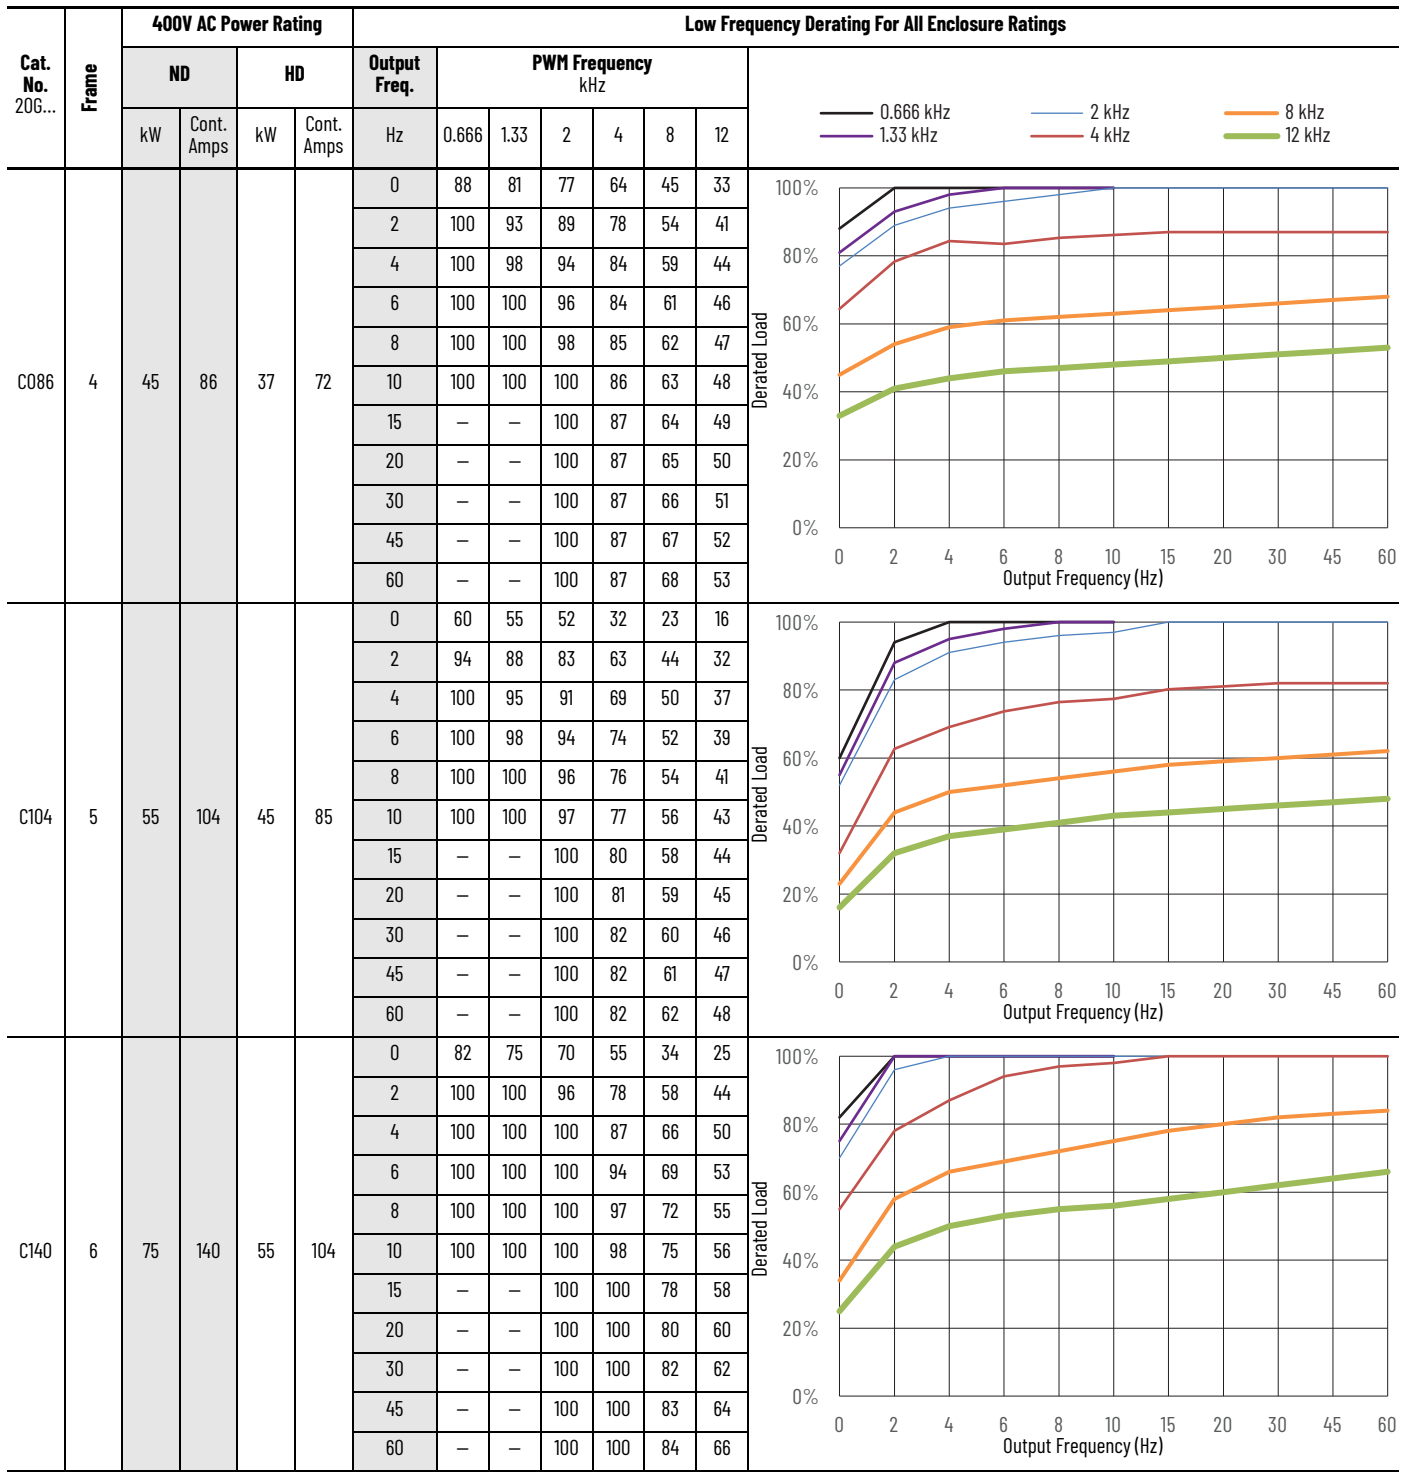


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

Cat. No. 206...	Frame	400V AC Power Rating				Low Frequency Derating For All Enclosure Ratings							
		ND		HD		Output Freq.	PWM Frequency kHz						
		kW	Cont. Amps	kW	Cont. Amps	Hz	0.666	1.33	2	4	8	12	
C170	6	90	170	75	140	0	86	78	72	56	34	24	
						2	100	100	100	91	62	46	
						4	100	100	100	100	70	53	
						6	100	100	100	100	74	55	
						8	100	100	100	100	76	57	
						10	100	100	100	100	78	59	
						15	—	—	100	100	81	62	
						20	—	—	100	100	84	64	
						30	—	—	100	100	86	66	
						45	—	—	100	100	87	67	
60	—	—	100	100	88	68							
C205	6	110	205	90	170	0	71	65	61	45	28	20	
						2	100	98	92	72	52	39	
						4	100	100	100	80	59	44	
						6	100	100	100	86	62	46	
						8	100	100	100	89	64	48	
						10	100	100	100	90	66	50	
						15	—	—	100	94	69	52	
						20	—	—	100	95	70	54	
						30	—	—	100	96	71	56	
						45	—	—	100	96	72	57	
60	—	—	100	96	74	58							
C260	6	132	260	110	205	0	63	57	53	30	22	20	
						2	95	90	84	62	42	31	
						4	100	95	90	68	46	33	
						6	100	98	92	70	47	34	
						8	100	100	94	71	48	35	
						10	100	100	95	72	49	36	
						15	—	—	98	74	50	37	
						20	—	—	99	76	51	38	
						30	—	—	100	76	52	39	
						45	—	—	100	76	53	40	
60	—	—	100	76	54	41							

Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

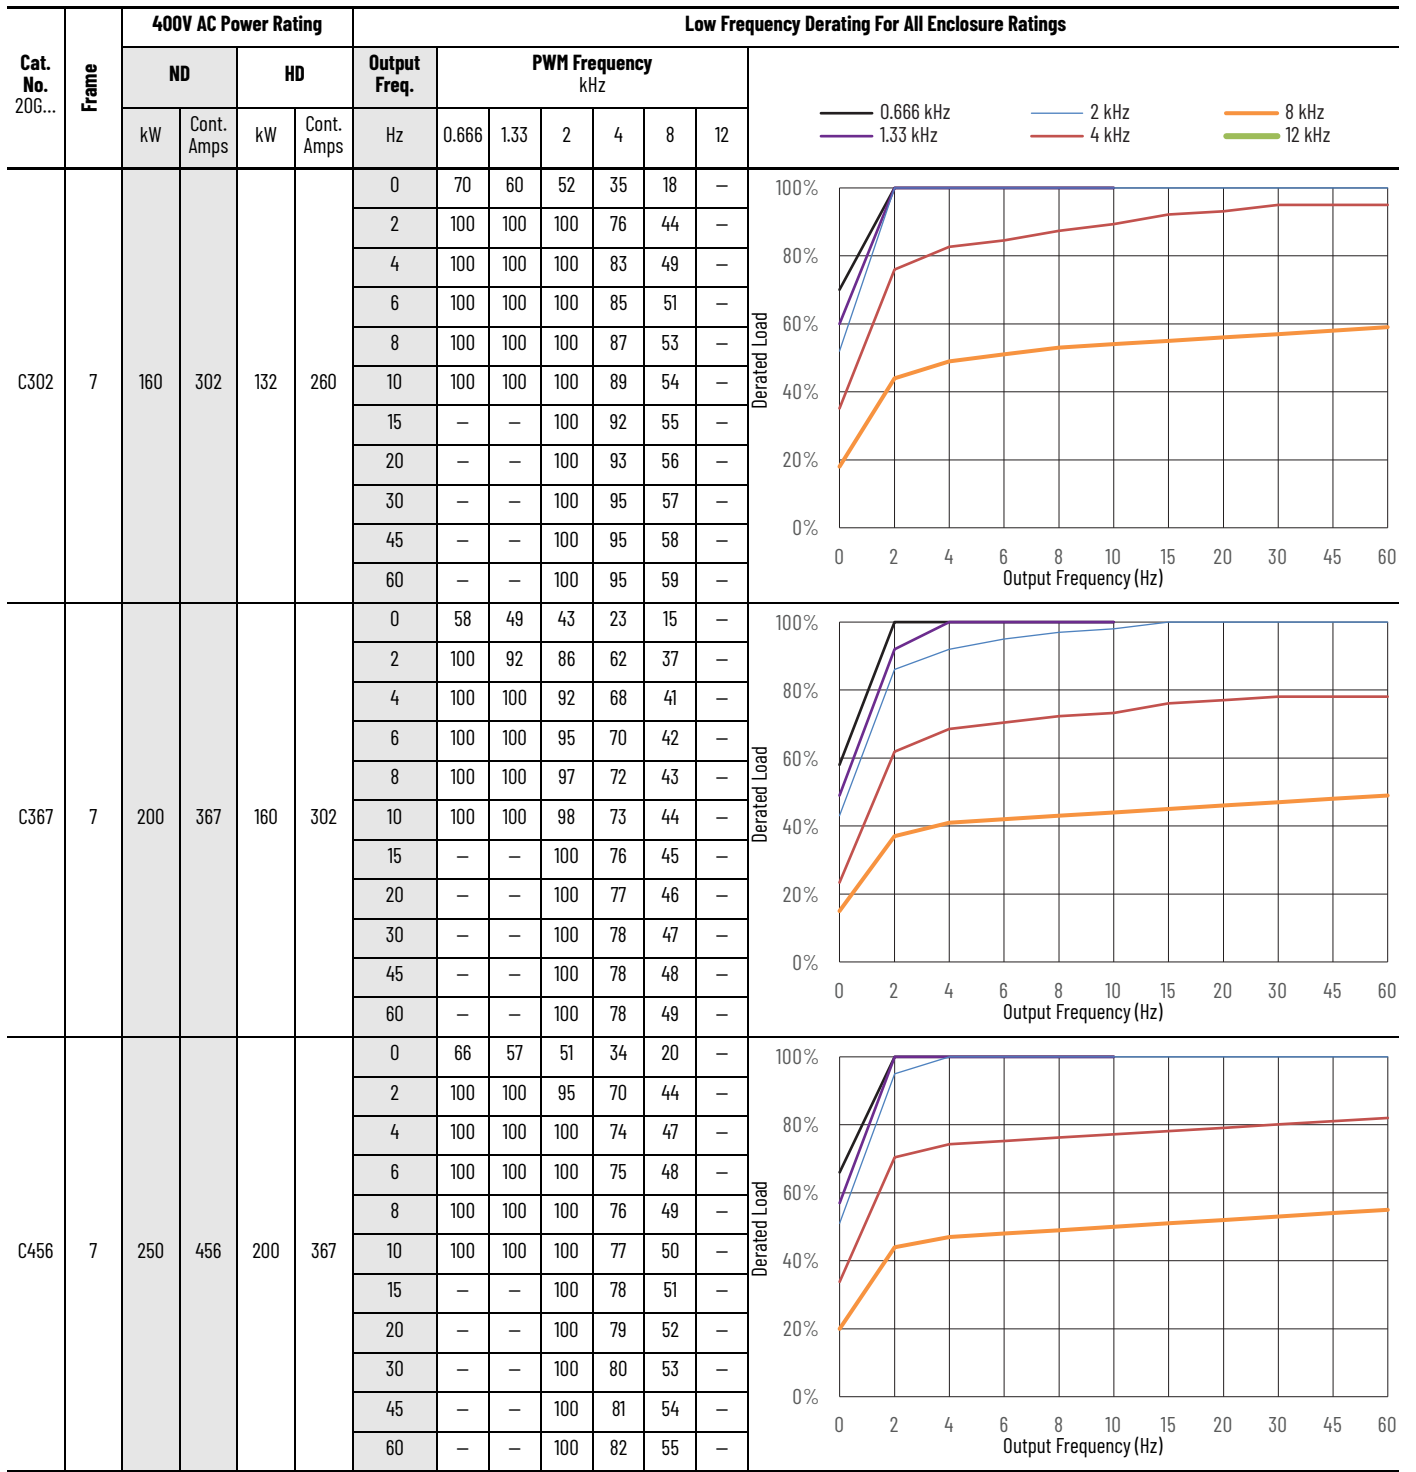


Low Frequency Derating Curves—400V AC Frames 1...7 (Continued)

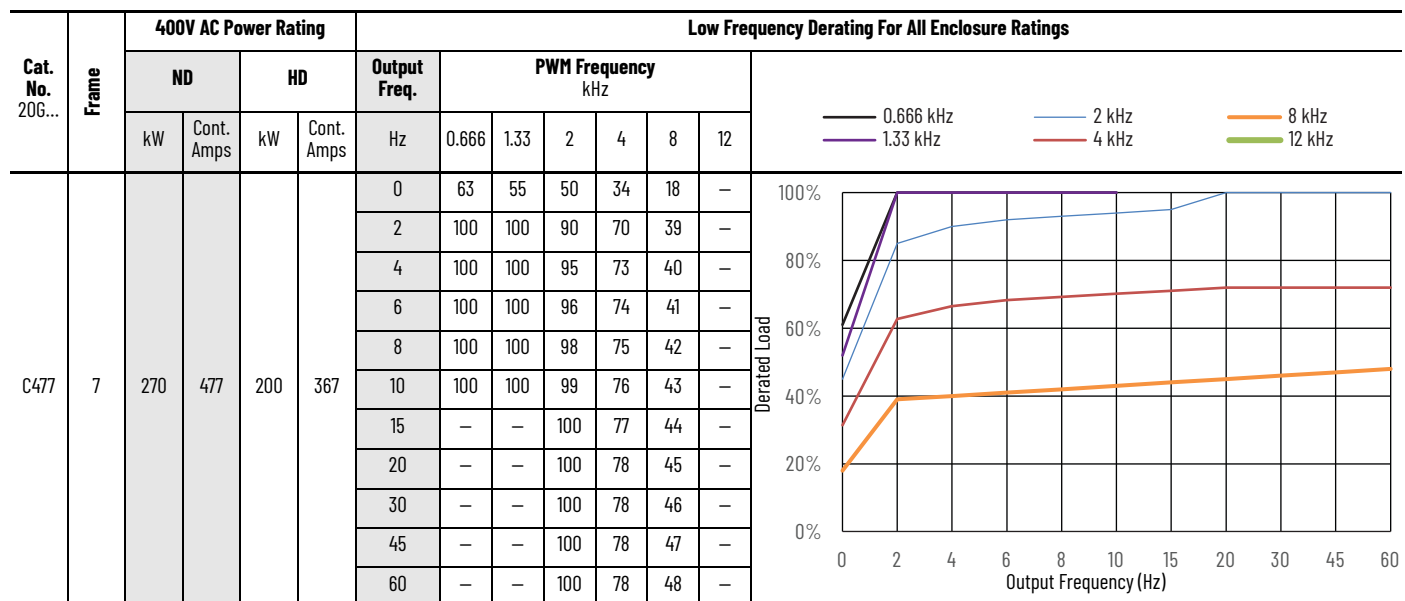


Low Frequency Derating—480V

The following graphs show the low frequency deratings for 480V PowerFlex 755TS drives. If a catalog number is not shown, that drive can be operated without derating as long as the limits specified on [page 21](#) are followed.

Low Frequency Derating Curves—480V AC Frames 1...7

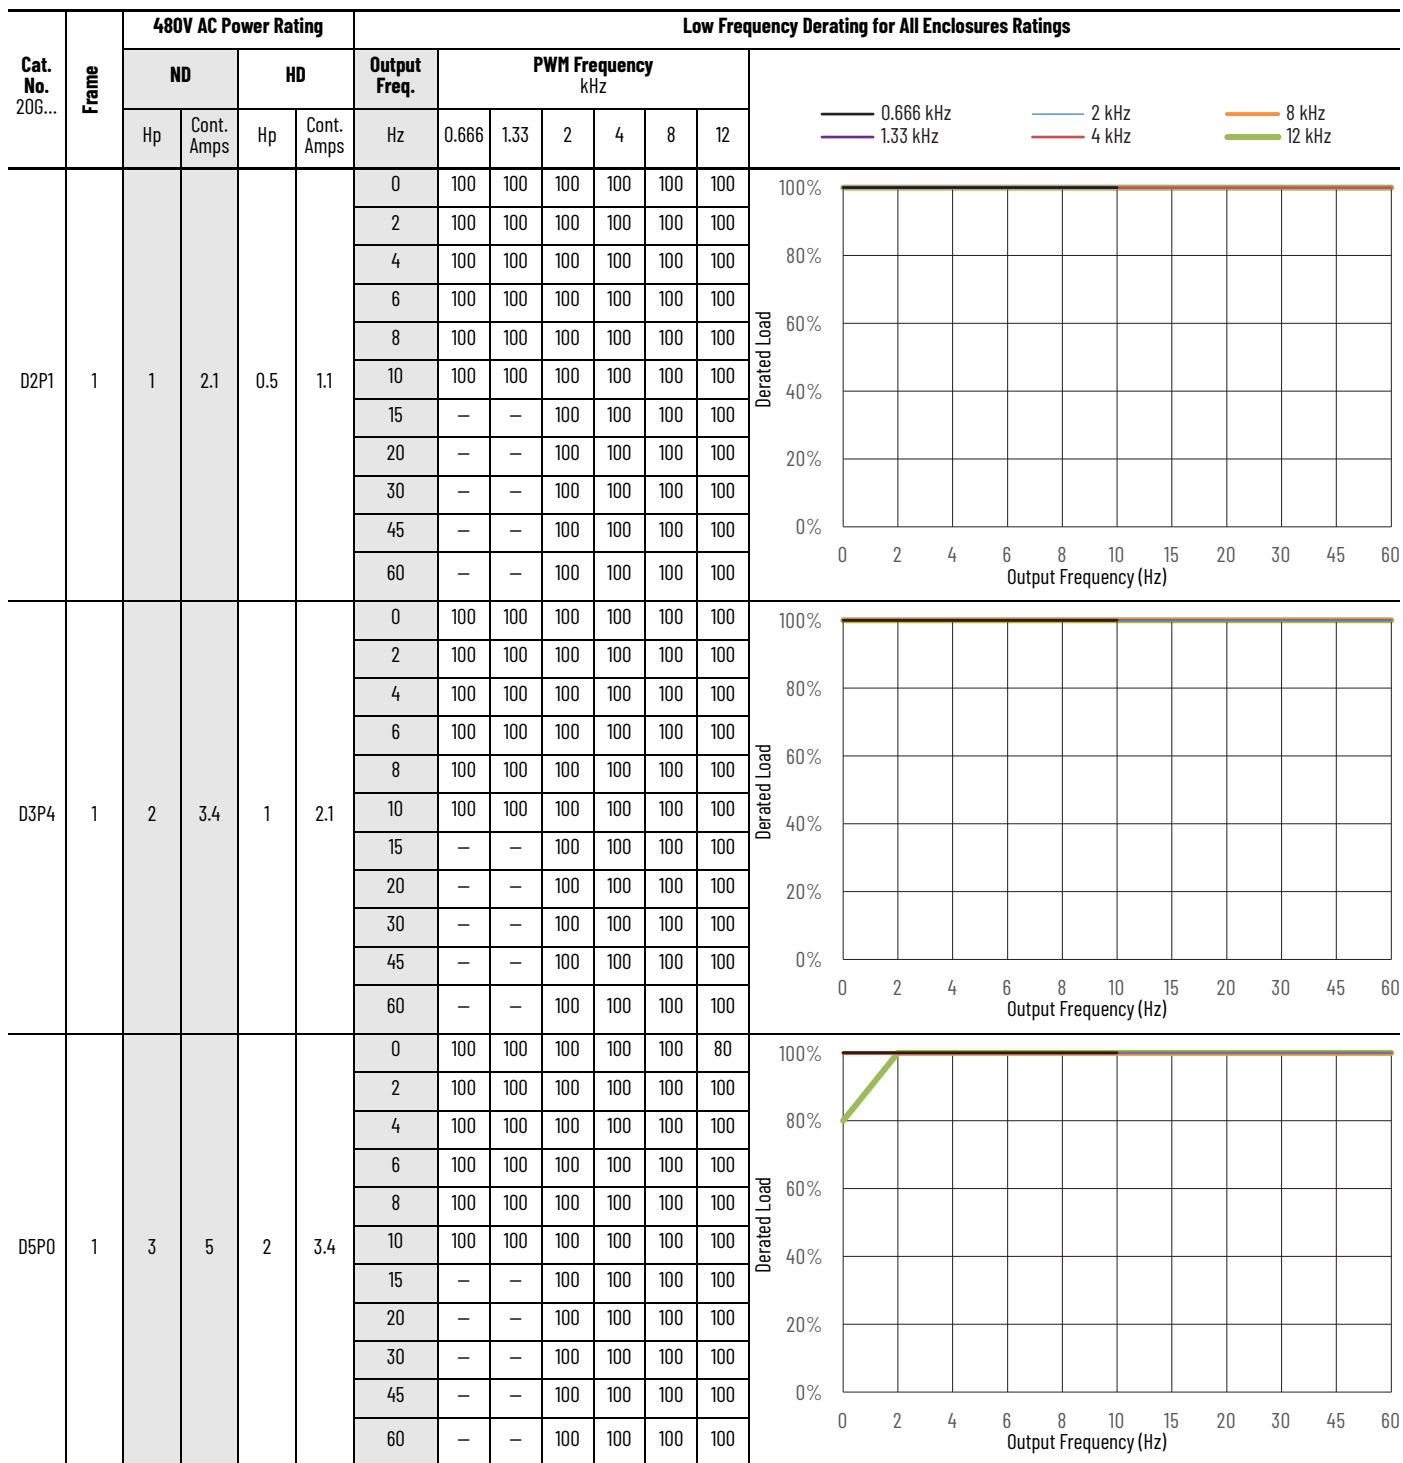


Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

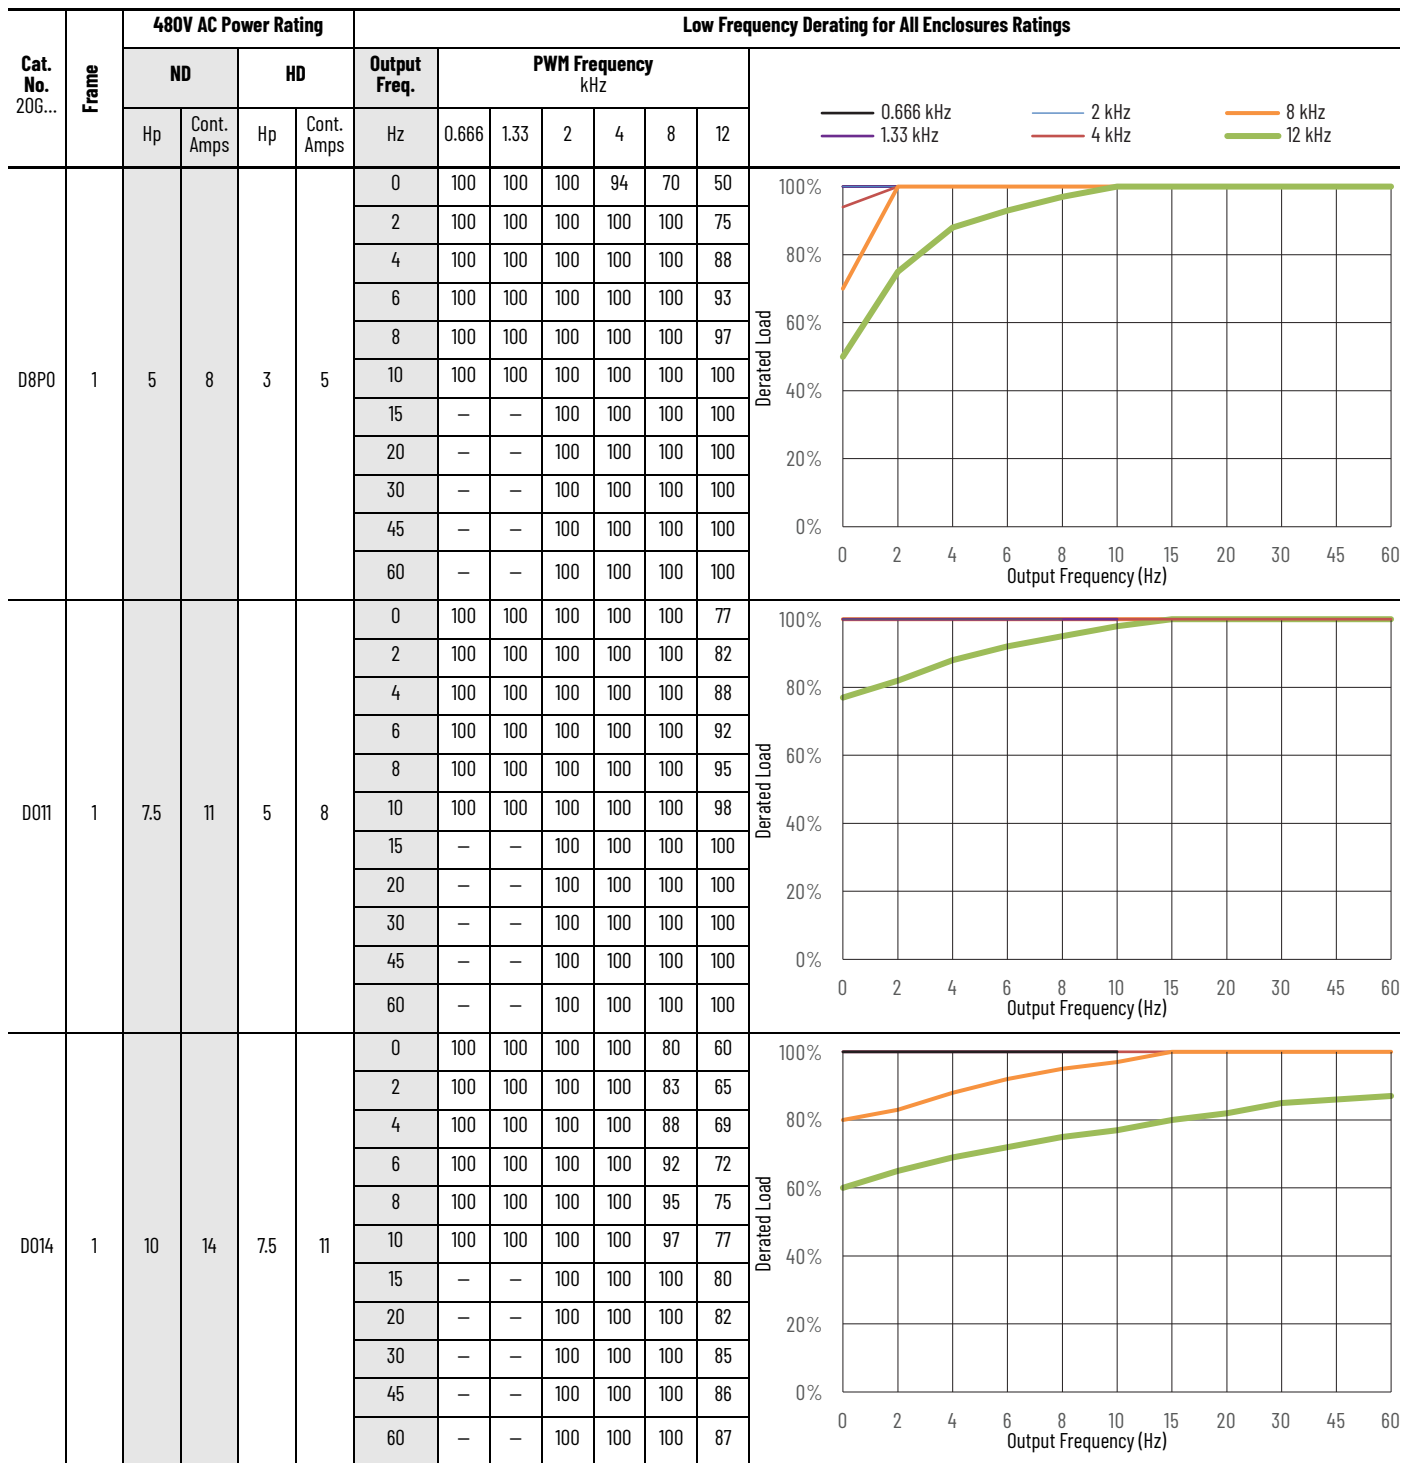


Low Frequency Derating Curves—480V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	480V AC Power Rating				Low Frequency Derating for All Enclosures Ratings																						
		ND		HD		Output Freq. Hz	PWM Frequency kHz						Derated Load	Output Frequency (Hz)														
		Hp	Cont. Amps	Hp	Cont. Amps		0.666	1.33	2	4	8	12																
D2P1	2	1	2.1	1	2.1	0	100	100	100	100	100	100			100	100	100	100%	0	2	4	6	8	10	15	20	30	45
						2	100	100	100	100	100	100	100	100	100													
						4	100	100	100	100	100	100	100	100	100	100												
						6	100	100	100	100	100	100	100	100	100	100												
						8	100	100	100	100	100	100	100	100	100	100												
						10	100	100	100	100	100	100	100	100	100	100												
						15	—	—	100	100	100	100	100	100	100	100												
						20	—	—	100	100	100	100	100	100	100	100												
						30	—	—	100	100	100	100	100	100	100	100												
						45	—	—	100	100	100	100	100	100	100	100												
60	—	—	100	100	100	100	100	100	100	100																		
D3P4	2	2	3.4	2	3.4	0	100	100	100	100	100	100	100	100	100%	0	2	4	6	8	10	15	20	30	45	60		
						2	100	100	100	100	100	100	100	100													100	
						4	100	100	100	100	100	100	100	100													100	100
						6	100	100	100	100	100	100	100	100													100	100
						8	100	100	100	100	100	100	100	100													100	100
						10	100	100	100	100	100	100	100	100													100	100
						15	—	—	100	100	100	100	100	100													100	100
						20	—	—	100	100	100	100	100	100													100	100
						30	—	—	100	100	100	100	100	100													100	100
						45	—	—	100	100	100	100	100	100													100	100
60	—	—	100	100	100	100	100	100	100	100																		
D5P0	2	3	5	3	5	0	100	100	100	100	100	100	100	100	100%	0	2	4	6	8	10	15	20	30	45	60		
						2	100	100	100	100	100	100	100	100													100	
						4	100	100	100	100	100	100	100	100													100	100
						6	100	100	100	100	100	100	100	100													100	100
						8	100	100	100	100	100	100	100	100													100	100
						10	100	100	100	100	100	100	100	100													100	100
						15	—	—	100	100	100	100	100	100													100	100
						20	—	—	100	100	100	100	100	100													100	100
						30	—	—	100	100	100	100	100	100													100	100
						45	—	—	100	100	100	100	100	100													100	100
60	—	—	100	100	100	100	100	100	100	100																		


Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

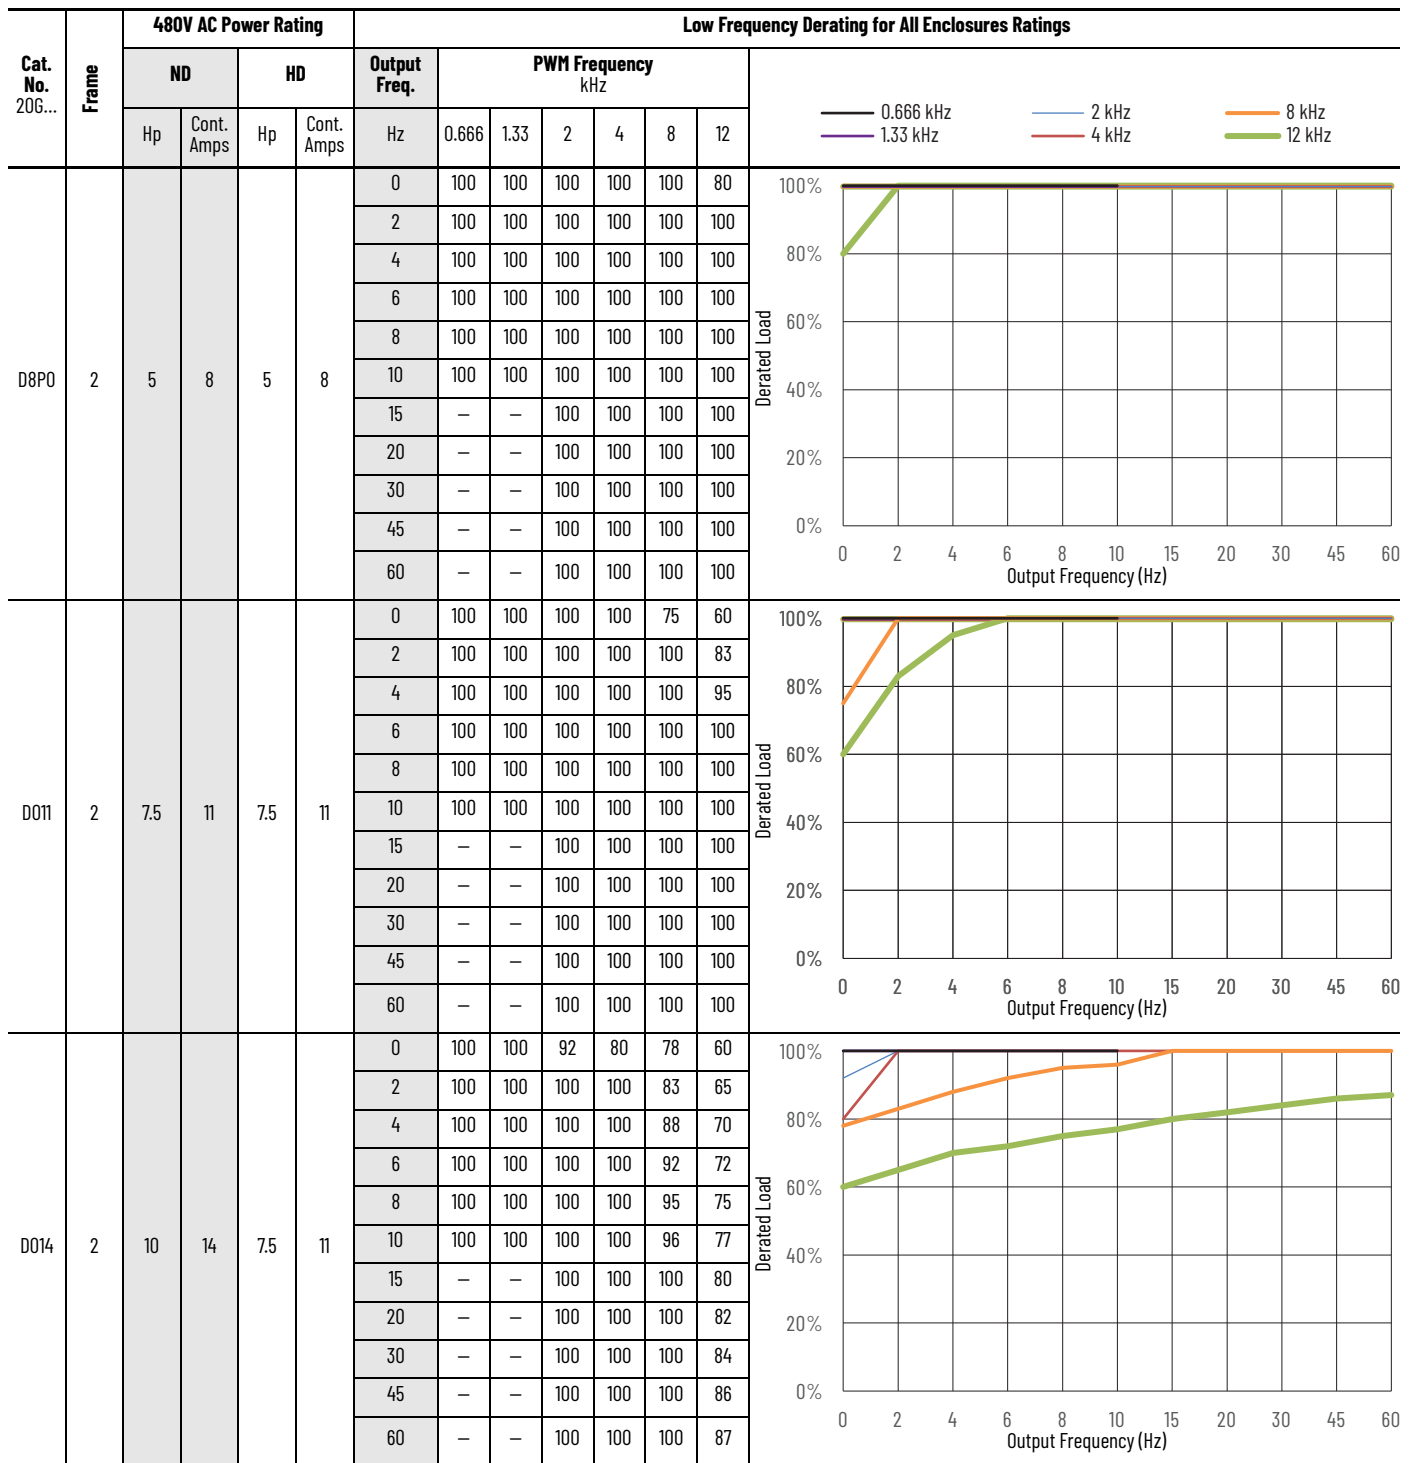


Low Frequency Derating Curves—480V AC Frames 1...7 (Continued)

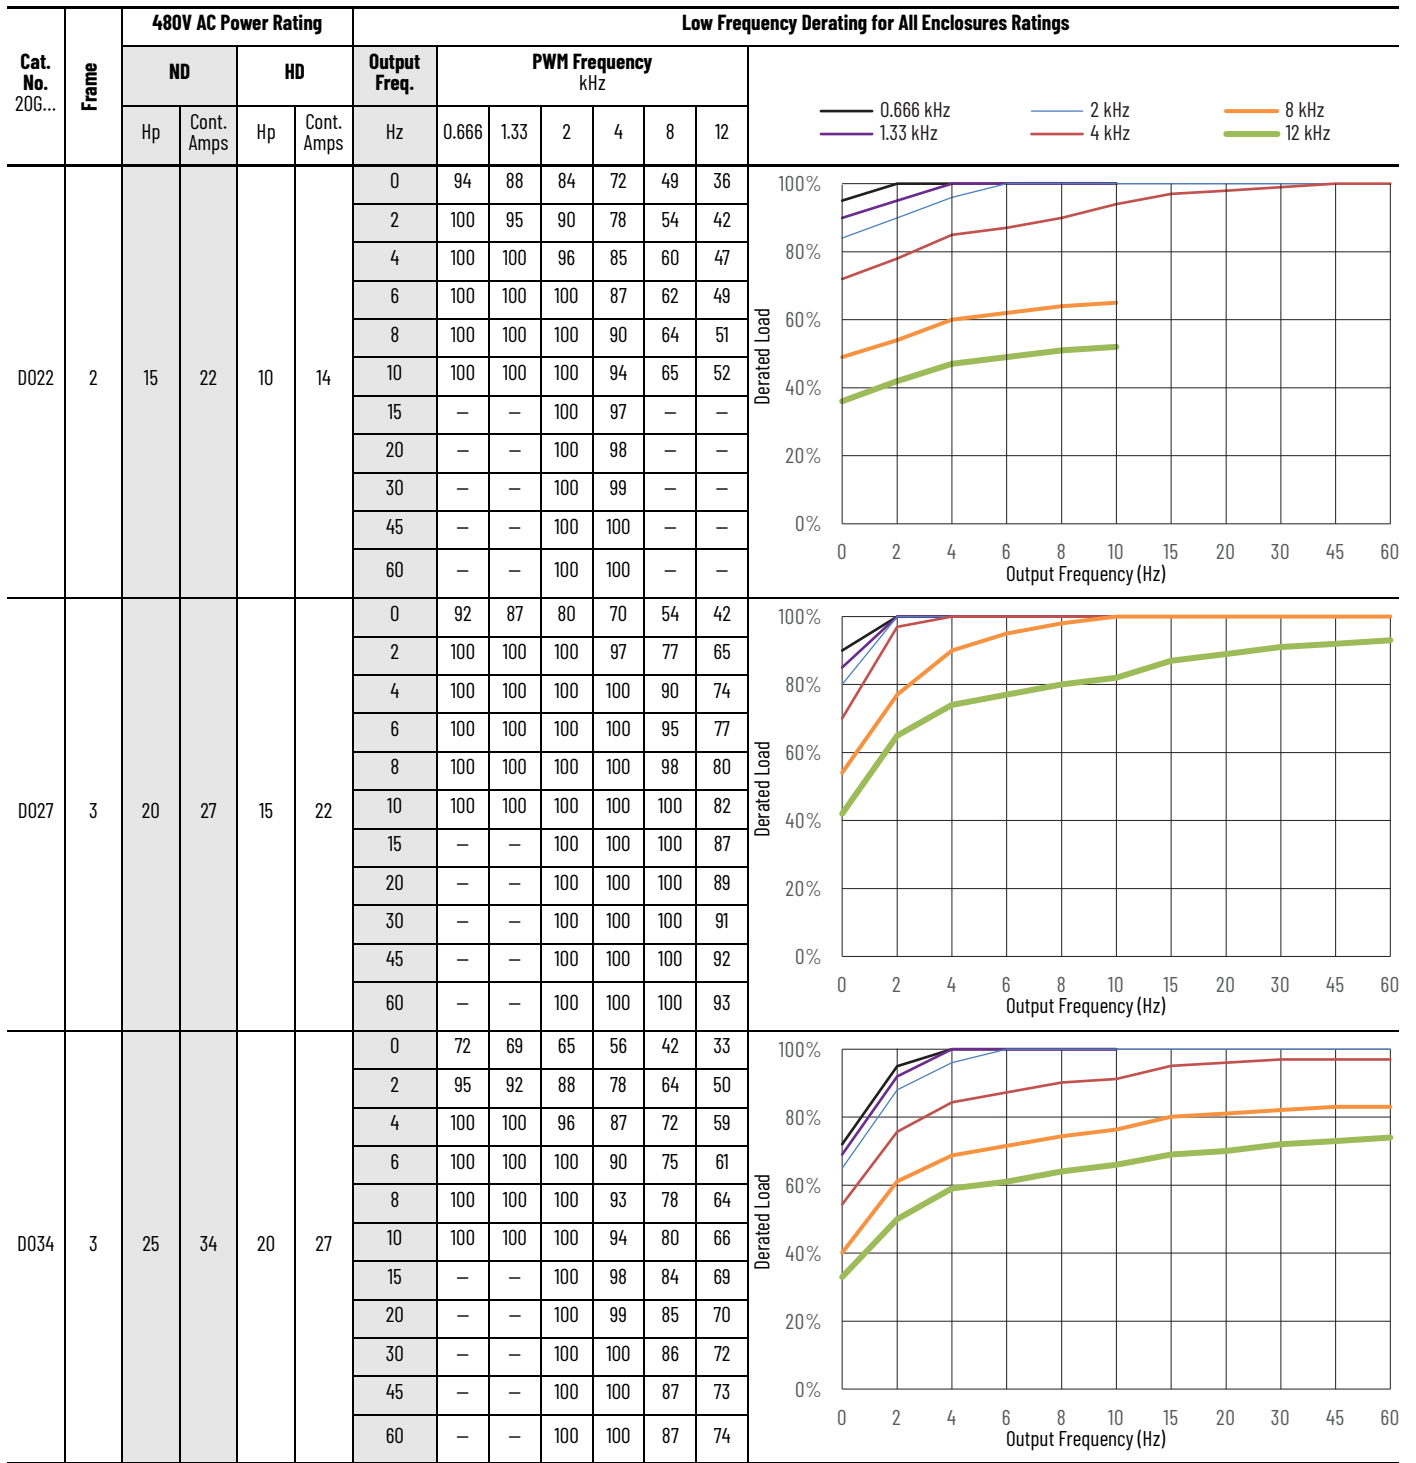


Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

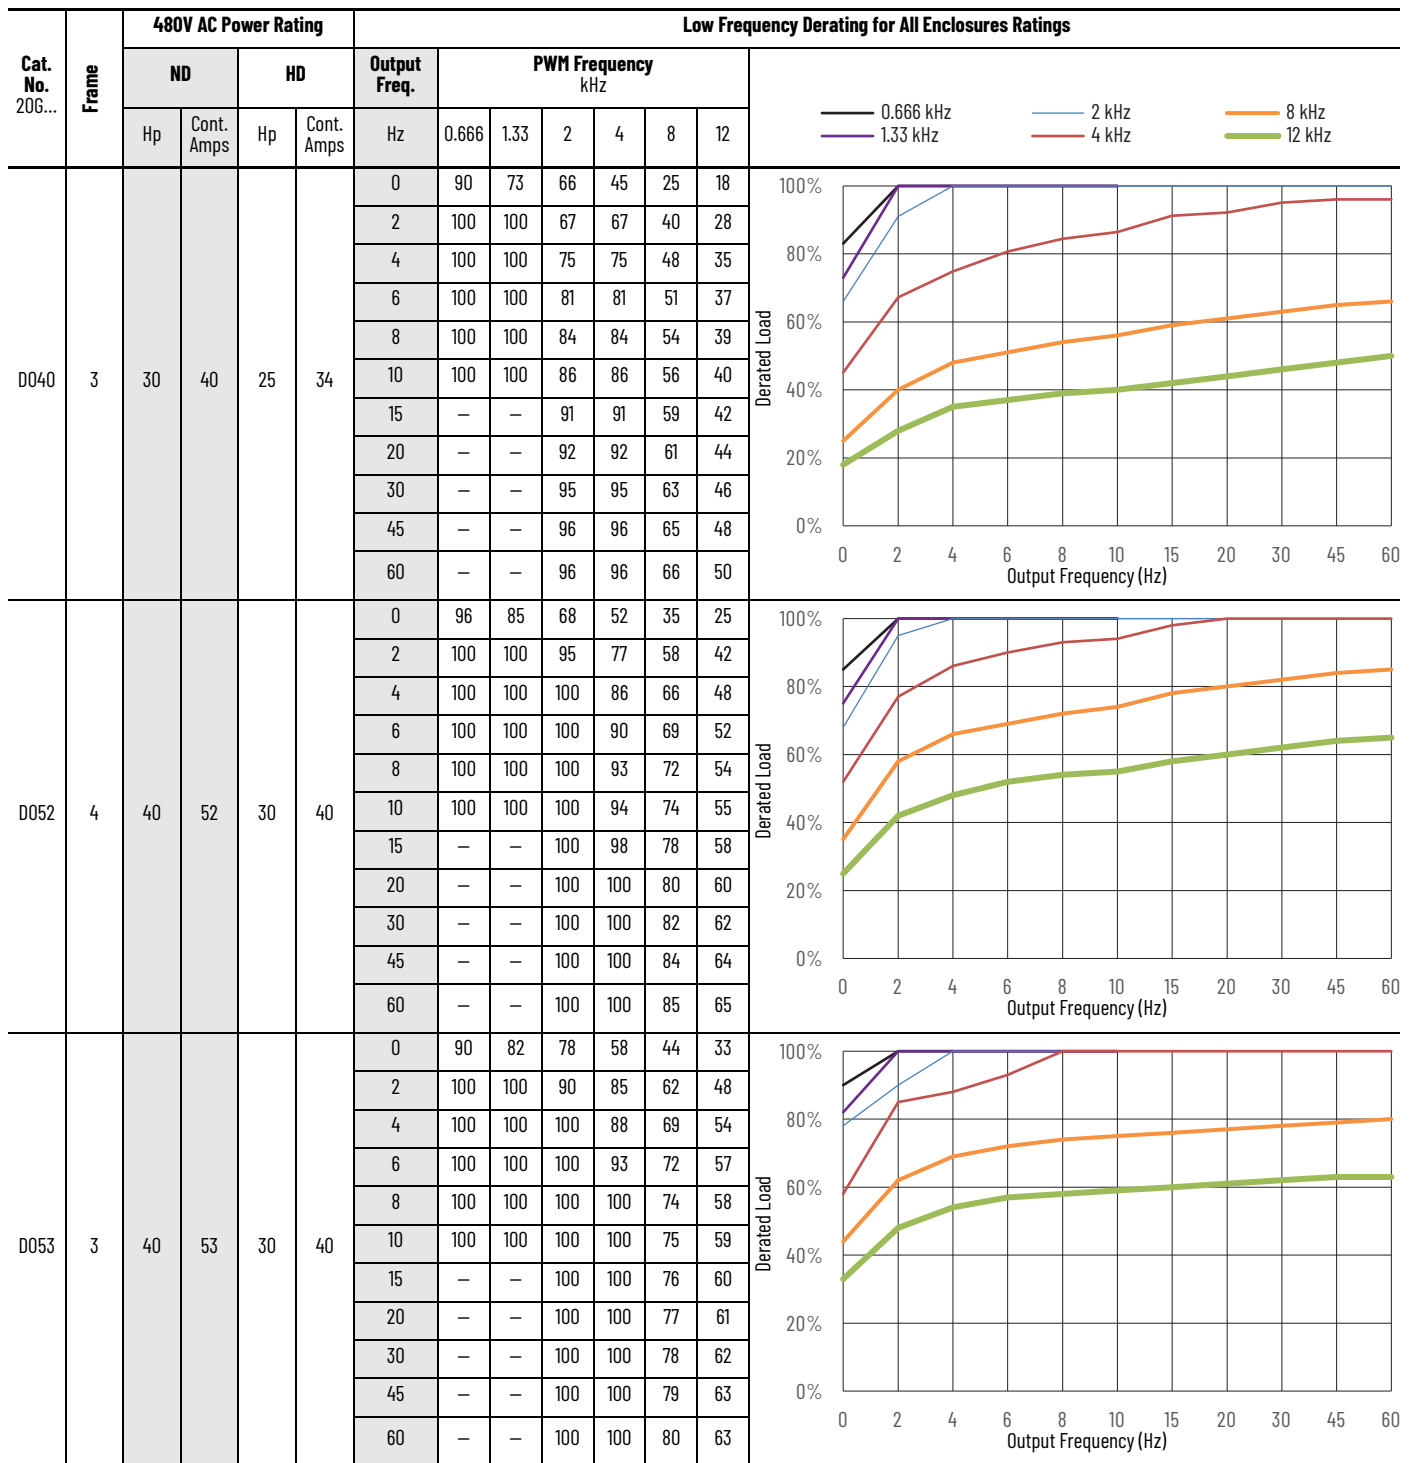


Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

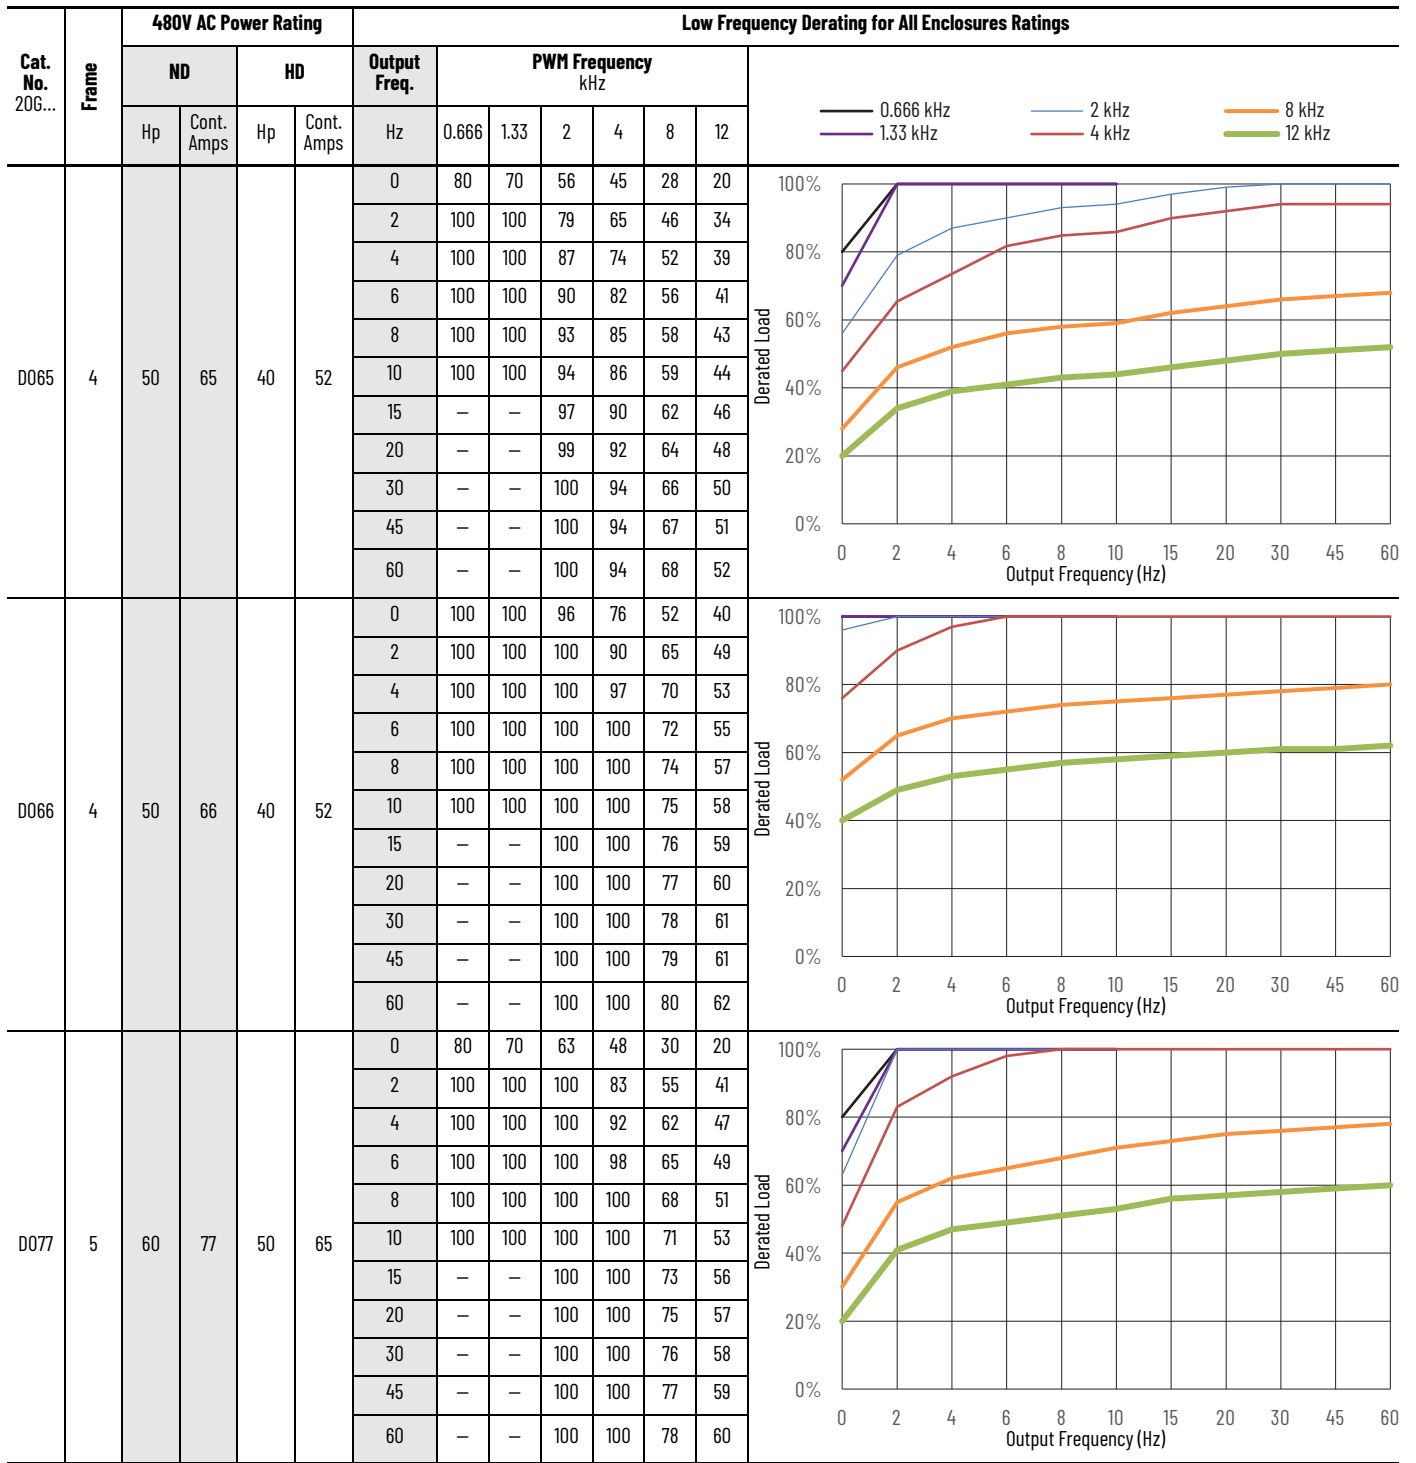


Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

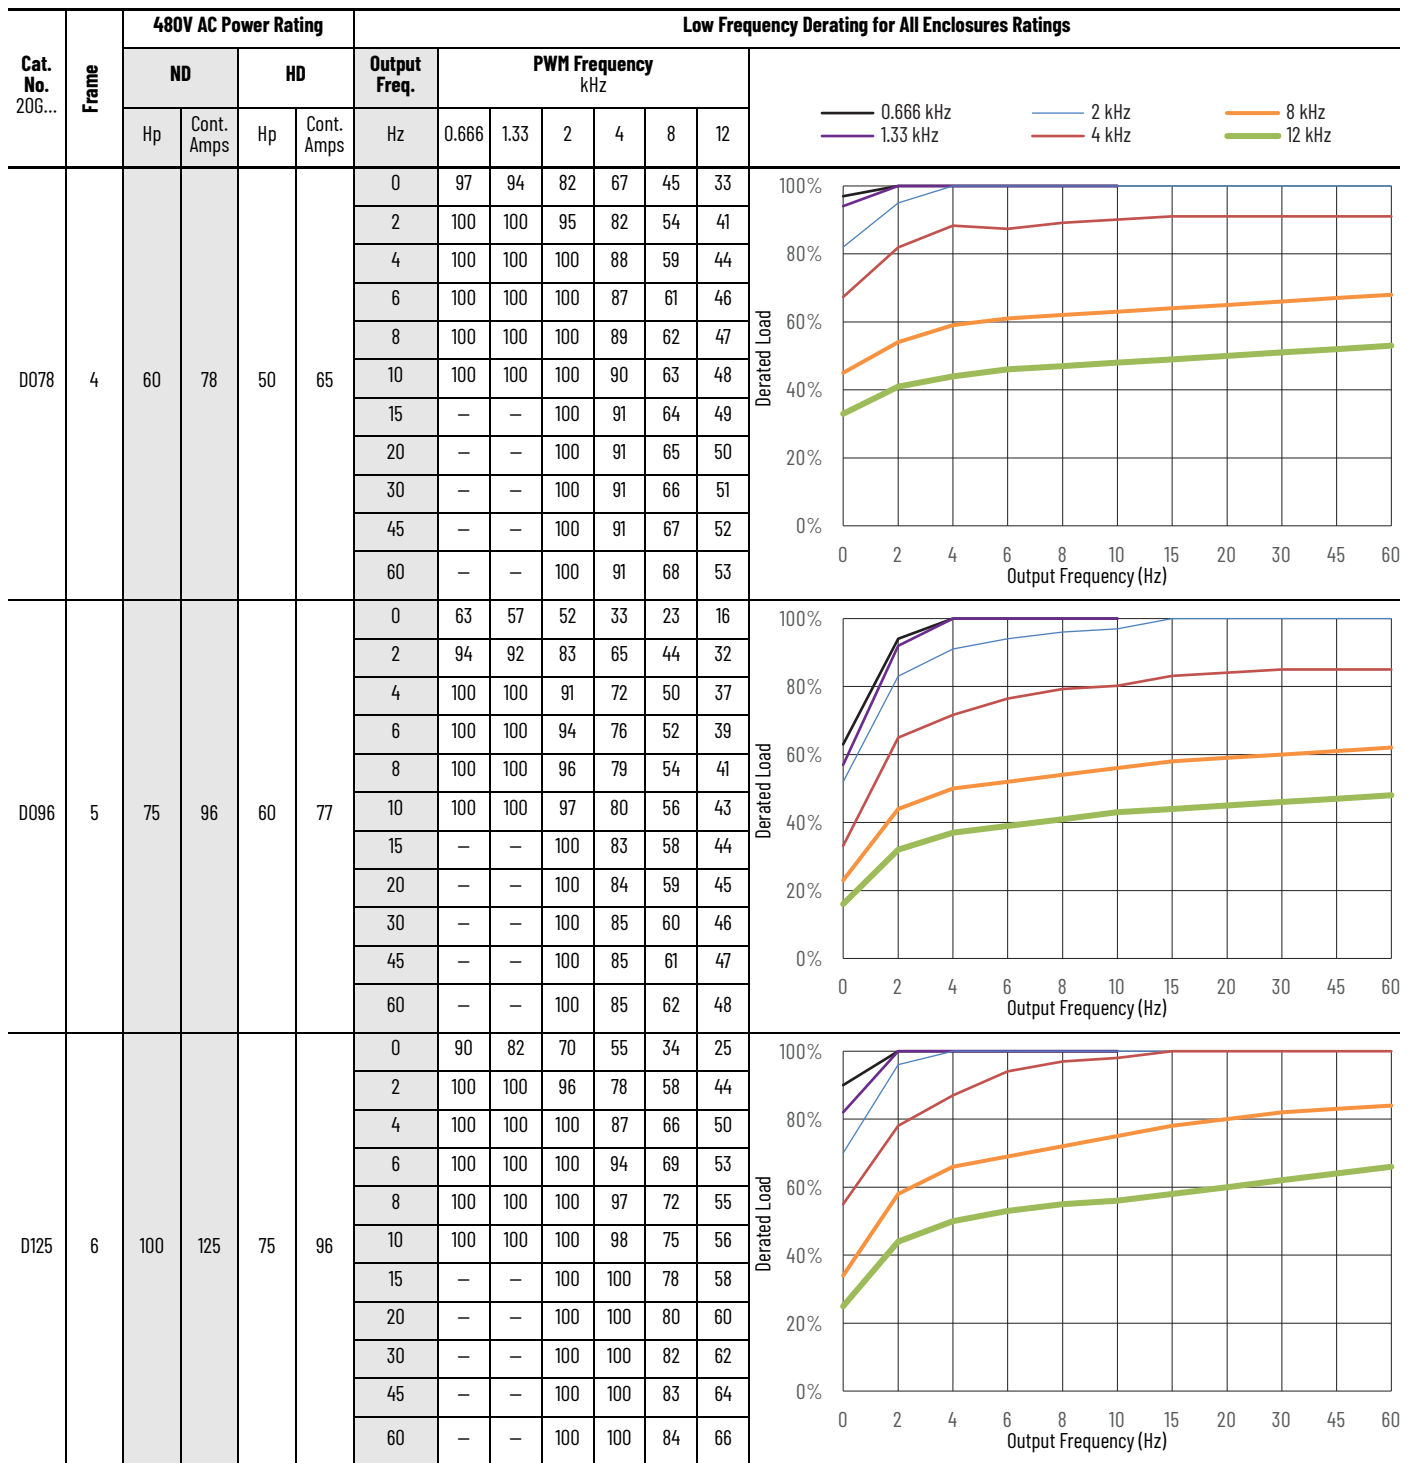


Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

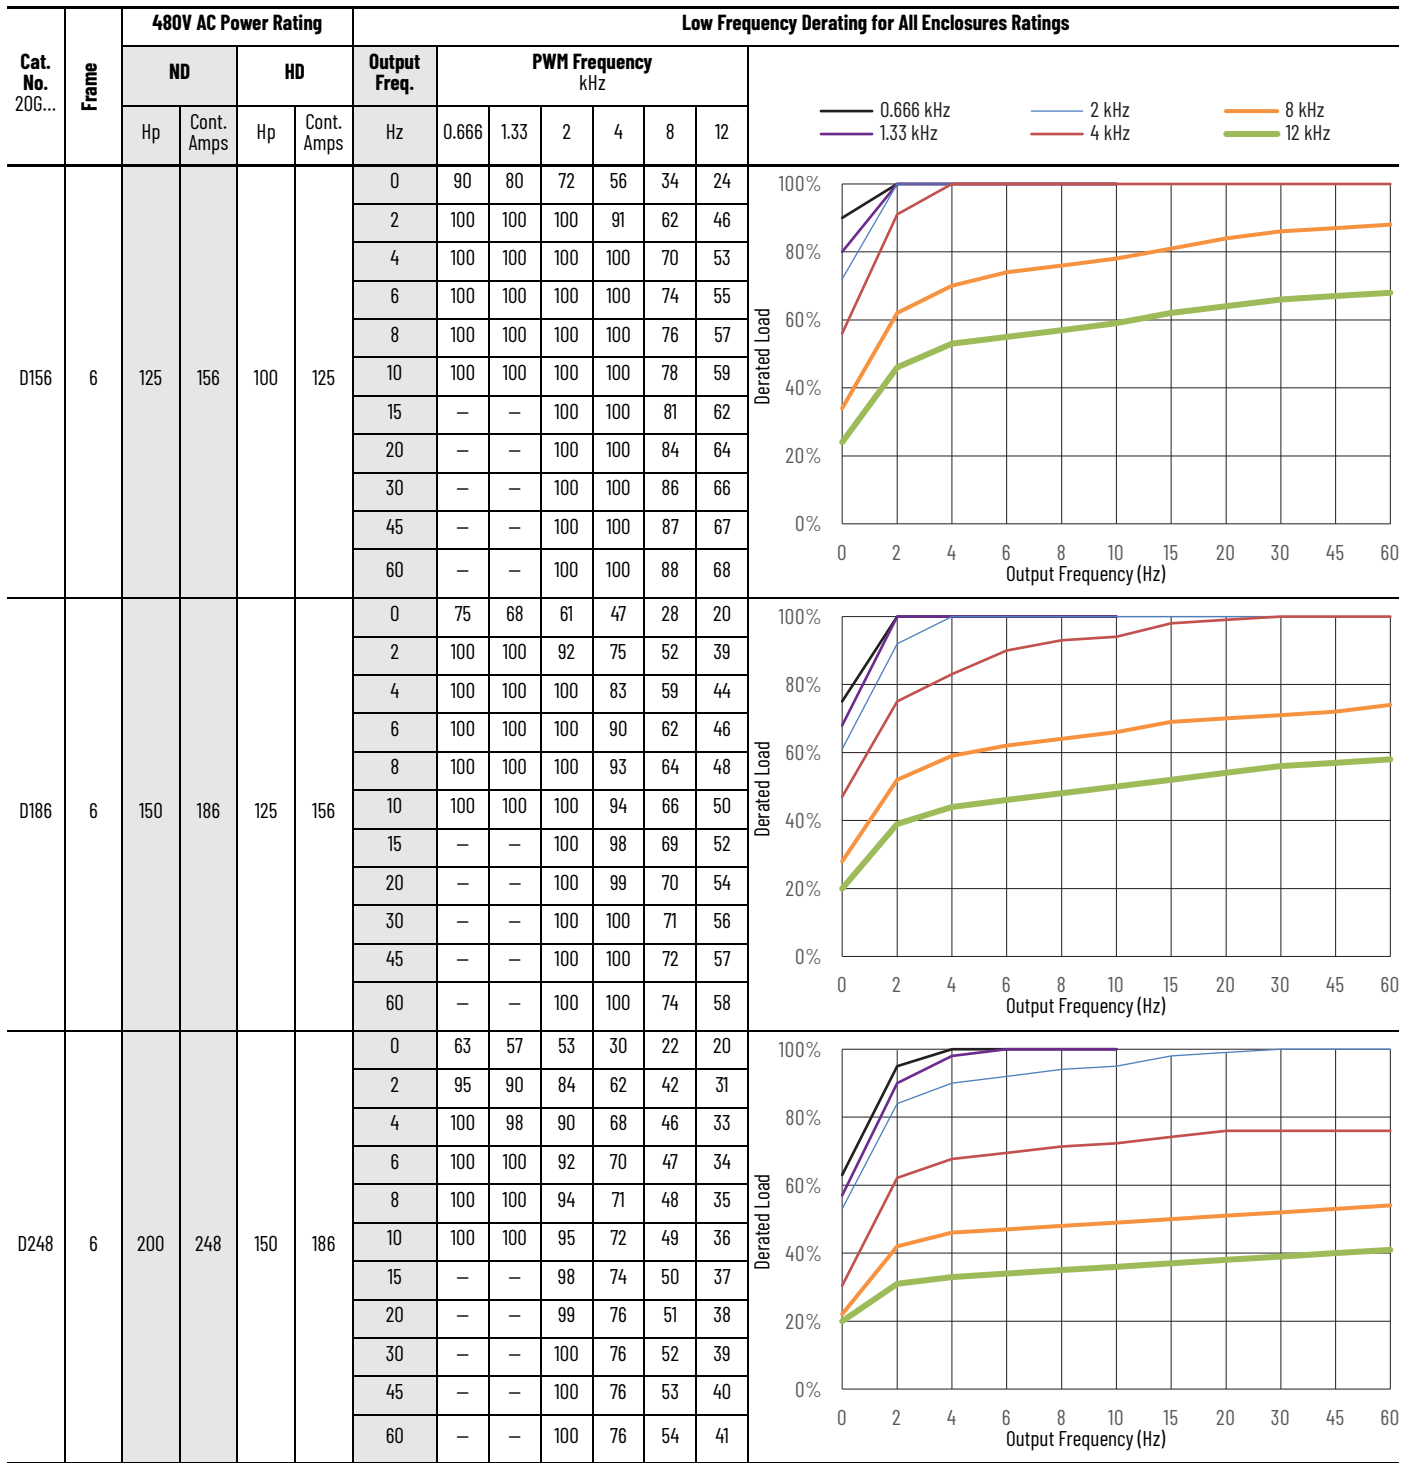

Low Frequency Drating Curves—480V AC Frames 1...7 (Continued)

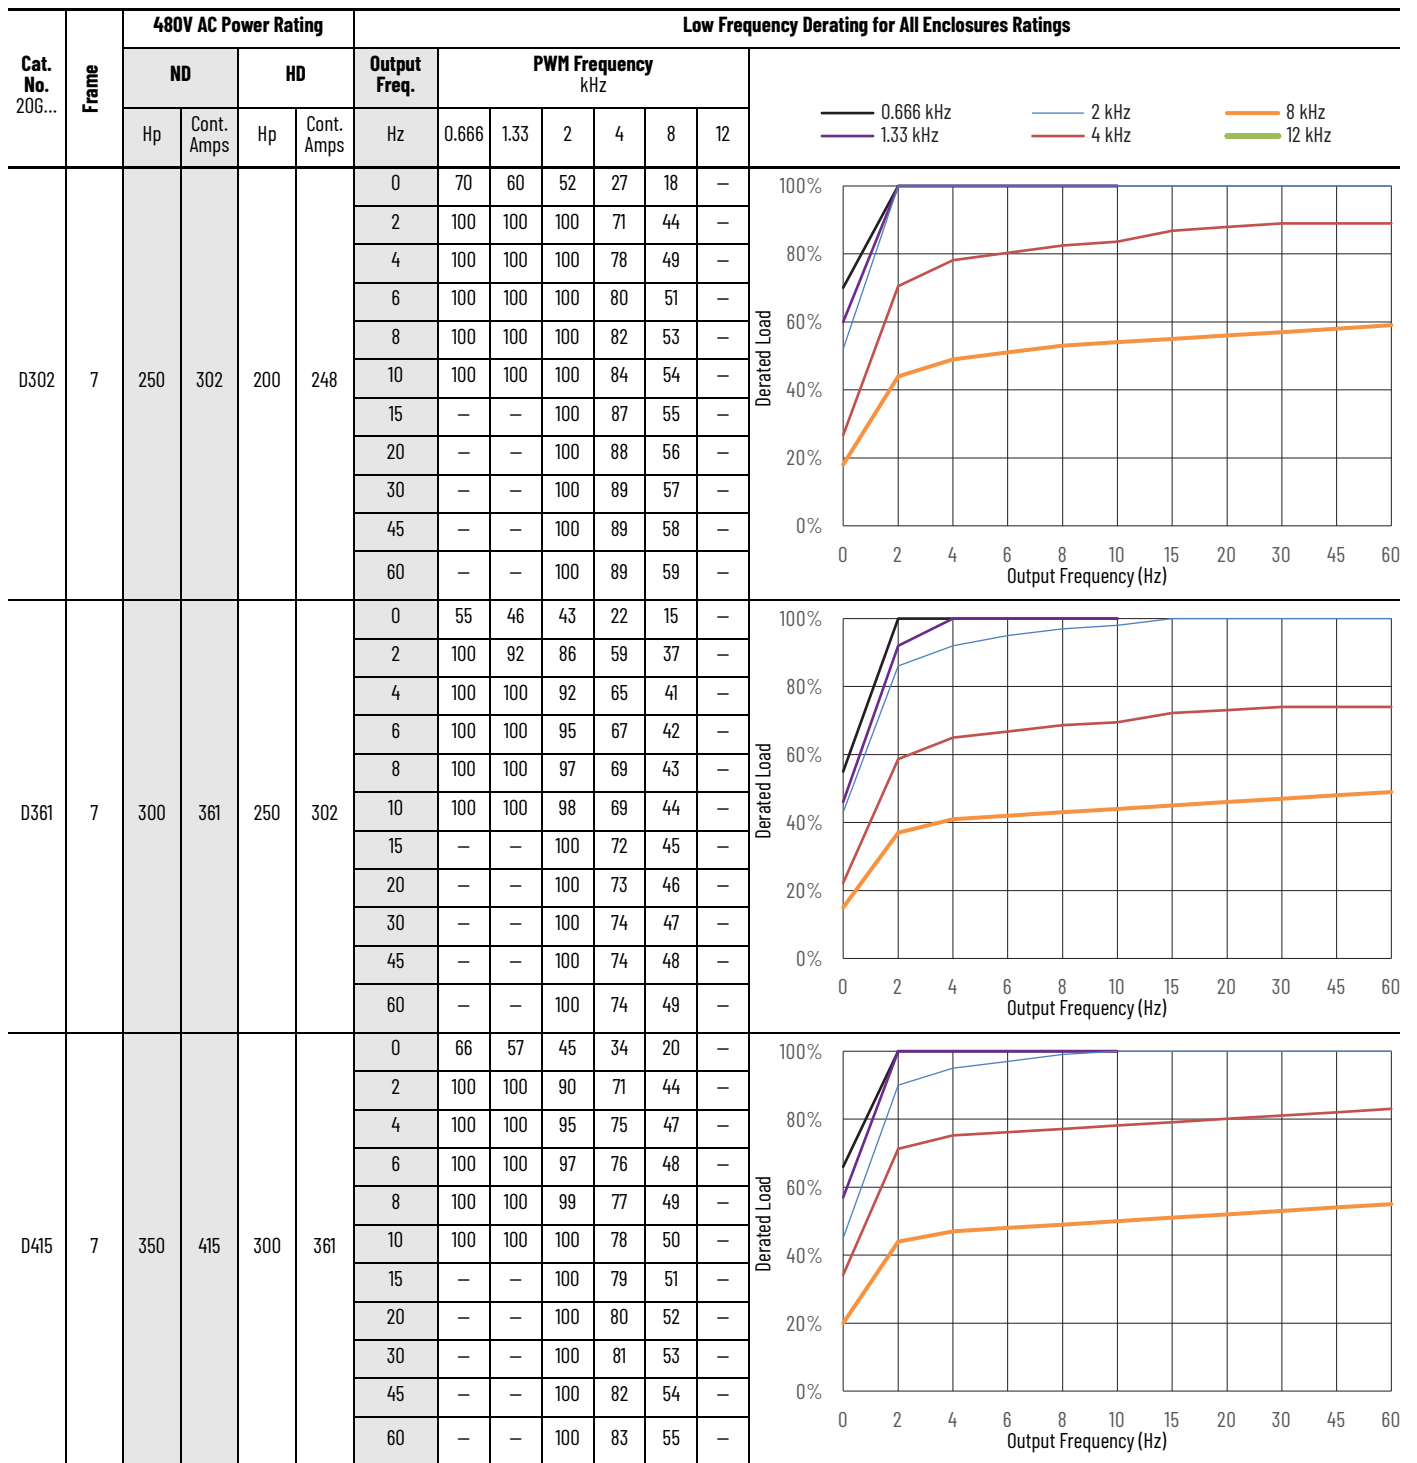

Low Frequency Derating Curves—480V AC Frames 1...7 (Continued)

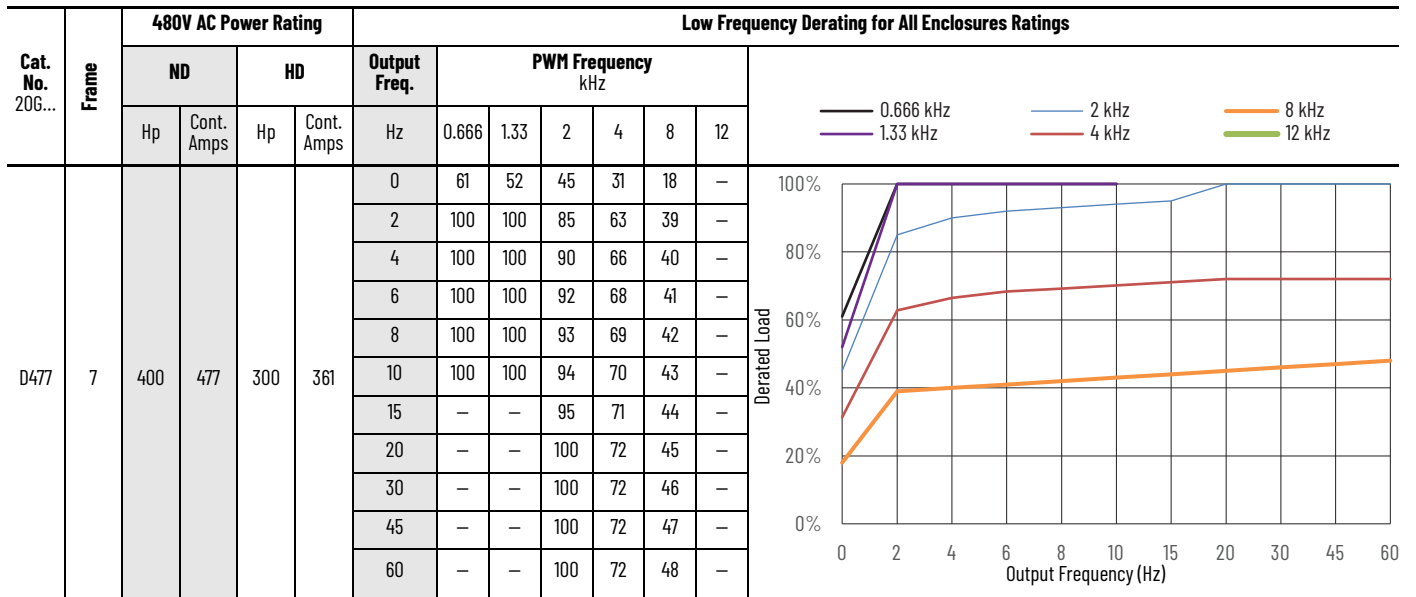


Temperature and Altitude Derating—400V

The following graphs show the ambient temperature and altitude deratings for 400V PowerFlex 755TS products.

Temperature and Altitude Derating—400V AC Frames 1...7

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating			
		Normal Duty		Heavy Duty		Ambient Temperature/Load		Altitude/Load	
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12	IP20/IP00, NEMA/UL Open Type	All Enclosures	
C2P1	1	0.75	2.1	0.37	1.3	--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz	--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		
C3P5	1	1.5	3.5	0.75	3.5	--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz	--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		
C5P0	1	2.2	5	1.5	3.5	--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz	--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

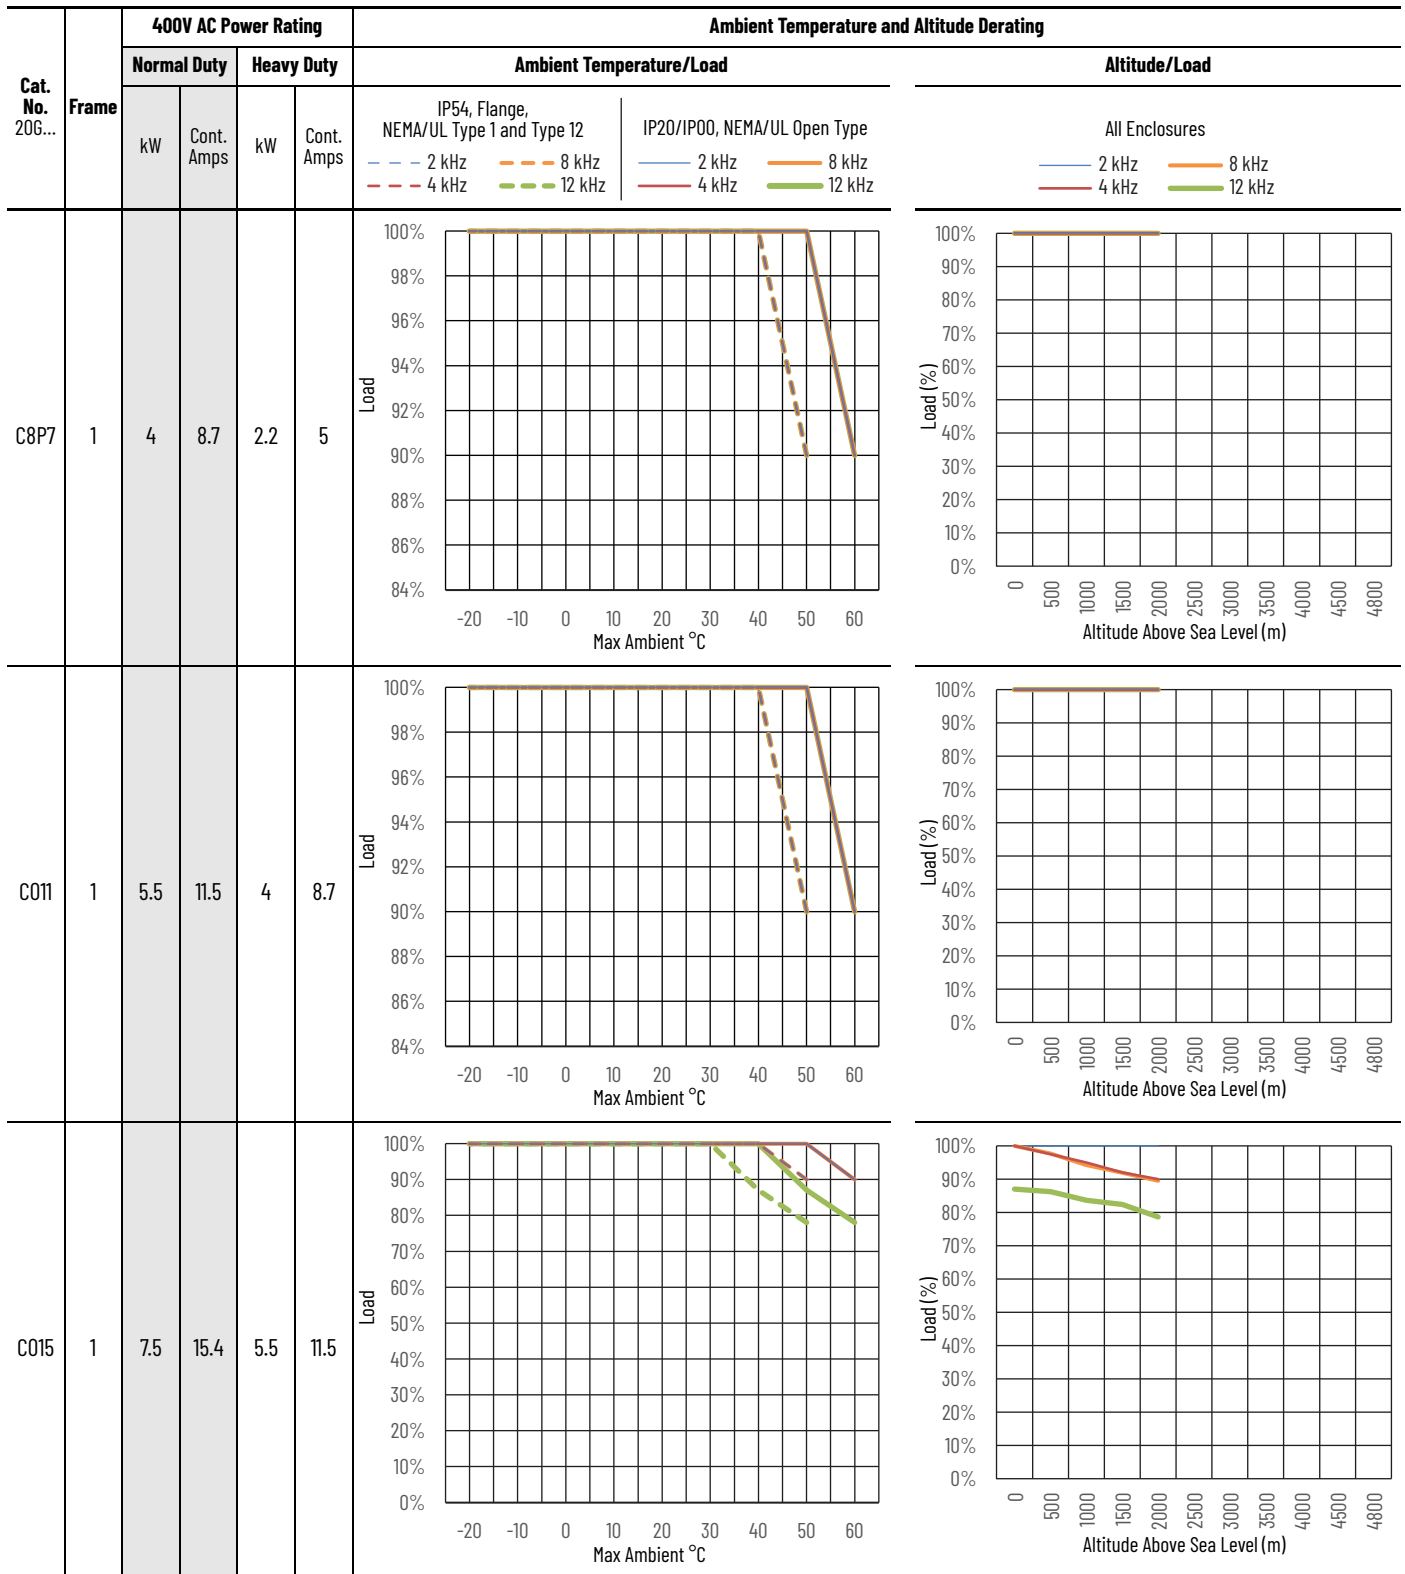

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
				--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz					
C2P1	2	0.75	2.1	0.75	2.1								
C3P5	2	1.5	3.5	1.5	3.5								
C5P0	2	2.2	5	2.2	5								

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12				IP20/IP00, NEMA/UL Open Type			
						--- 2 kHz --- 4 kHz --- 8 kHz --- 12 kHz	--- 2 kHz --- 4 kHz --- 8 kHz --- 12 kHz	All Enclosures					
C8P7	2	4	8.7	4	8.7								
C011	2	5.5	11.5	5.5	11.5								
C015	2	7.5	15.4	5.5	11.5								

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating		
		Normal Duty		Heavy Duty		Ambient Temperature/Load		Altitude/Load
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12	IP20/IP00, NEMA/UL Open Type	All Enclosures
						— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz
C022	2	11	22	7.5	15.4			
C030	3	15	30	11	22			
C037	3	18.5	37	15	30			

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
				--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz					
C043	3	22	43	18.5	37								
C060	4	30	60	22	43								
C061	3	30	61	22	43								

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating					
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load	
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures	
				--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz			
C072	4	37	72	30	60						
C073	4	37	73	30	60						
C085	5	45	85	37	72						

Temperature and Altitude Derating—400V AC Frames 1..7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
				--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz					
C086	4	45	86	37	72								
C104	5	55	104	45	85								
C140	6	75	140	55	104								

Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 20G...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating		
		Normal Duty		Heavy Duty		Ambient Temperature/Load		Altitude/Load
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12	IP20/IP00, NEMA/UL Open Type	All Enclosures
C170	6	90	170	75	140	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz
C205	6	110	205	90	170	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz
C260	6	132	260	110	205	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz	— 2 kHz — 8 kHz - - 4 kHz - - 12 kHz


Temperature and Altitude Derating—400V AC Frames 1...7 (Continued)

Cat. No. 206...	Frame	400V AC Power Rating				Ambient Temperature and Altitude Derating					
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load	
		kW	Cont. Amps	kW	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures	
				— 2 kHz	— 8 kHz	— 2 kHz	— 8 kHz	— 2 kHz	— 8 kHz	— 4 kHz	— 12 kHz
C302	7	160	302	132	260						
C367	7	200	367	160	302						


Temperature and Altitude Derating—480V

The following graphs show the ambient temperature and altitude deratings for 480V PowerFlex 755TS products.

Temperature and Altitude Derating—480V AC Frames 1..7

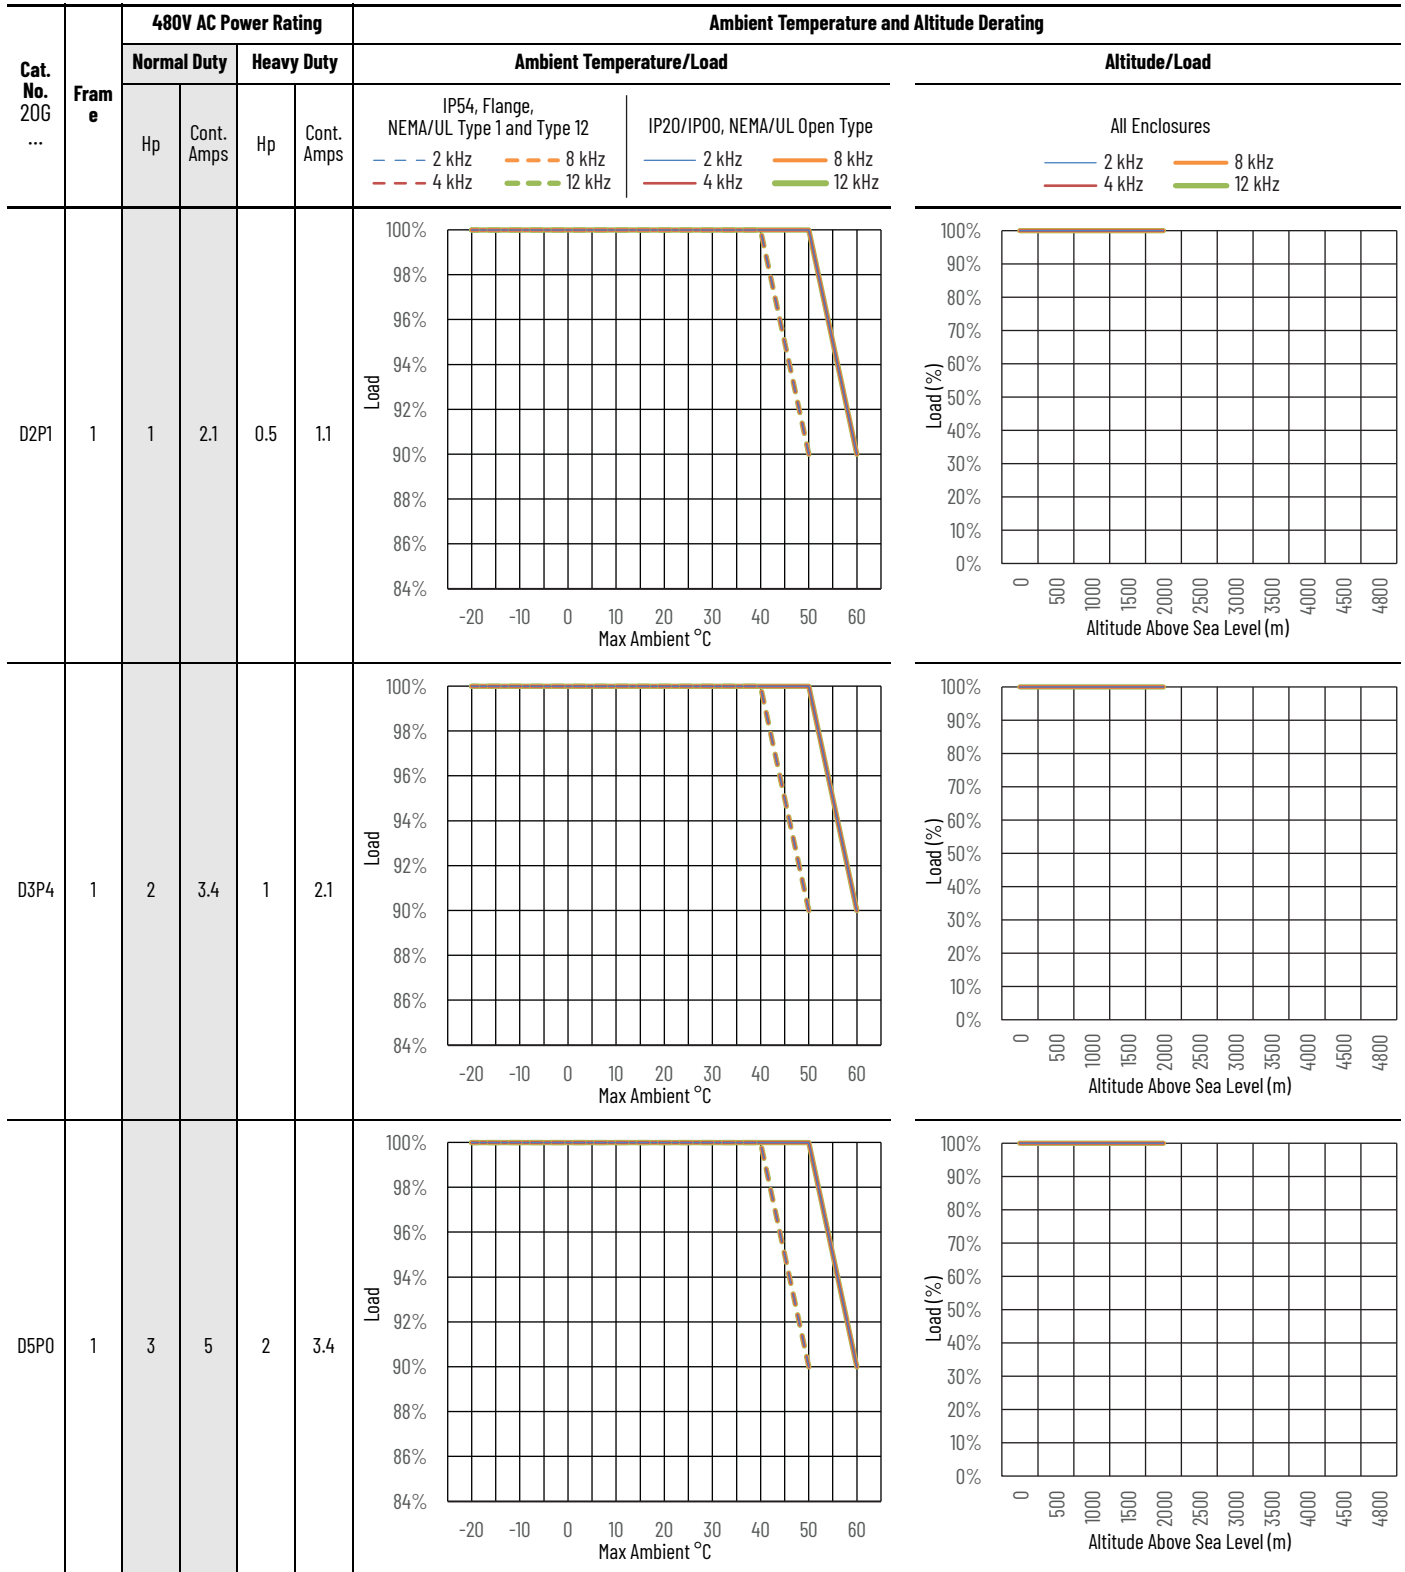


Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

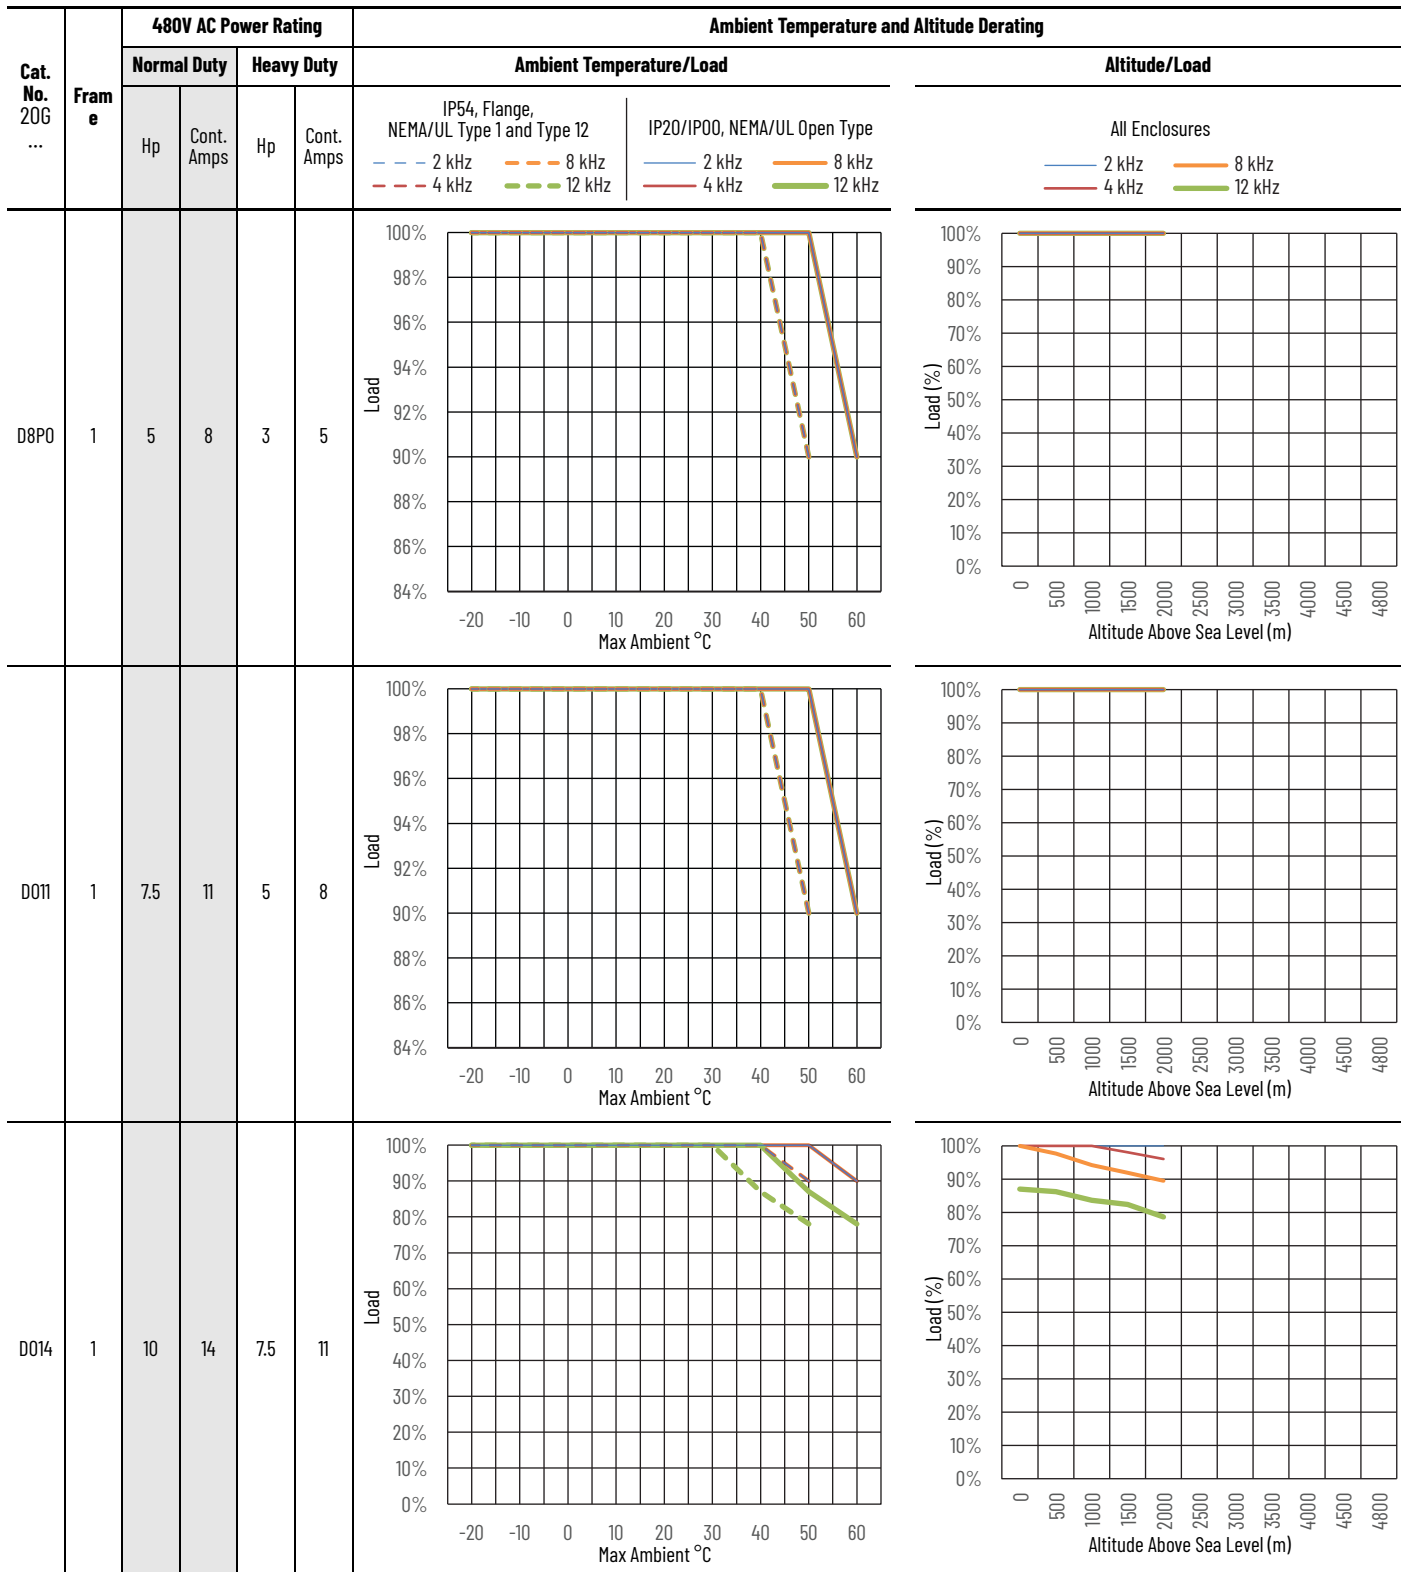


Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

Cat. No. 20G ...	Frame	480V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		Hp	Cont. Amps	Hp	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
						— 2 kHz	— 4 kHz	— 8 kHz	— 12 kHz	— 2 kHz	— 4 kHz	— 8 kHz	— 12 kHz
D2P1	2	1	2.1	1	2.1								
D3P4	2	2	3.4	2	3.4								
D5P0	2	3	5	3	5								

Temperature and Altitude Derating—480V AC Frames 1...7 (Continued)

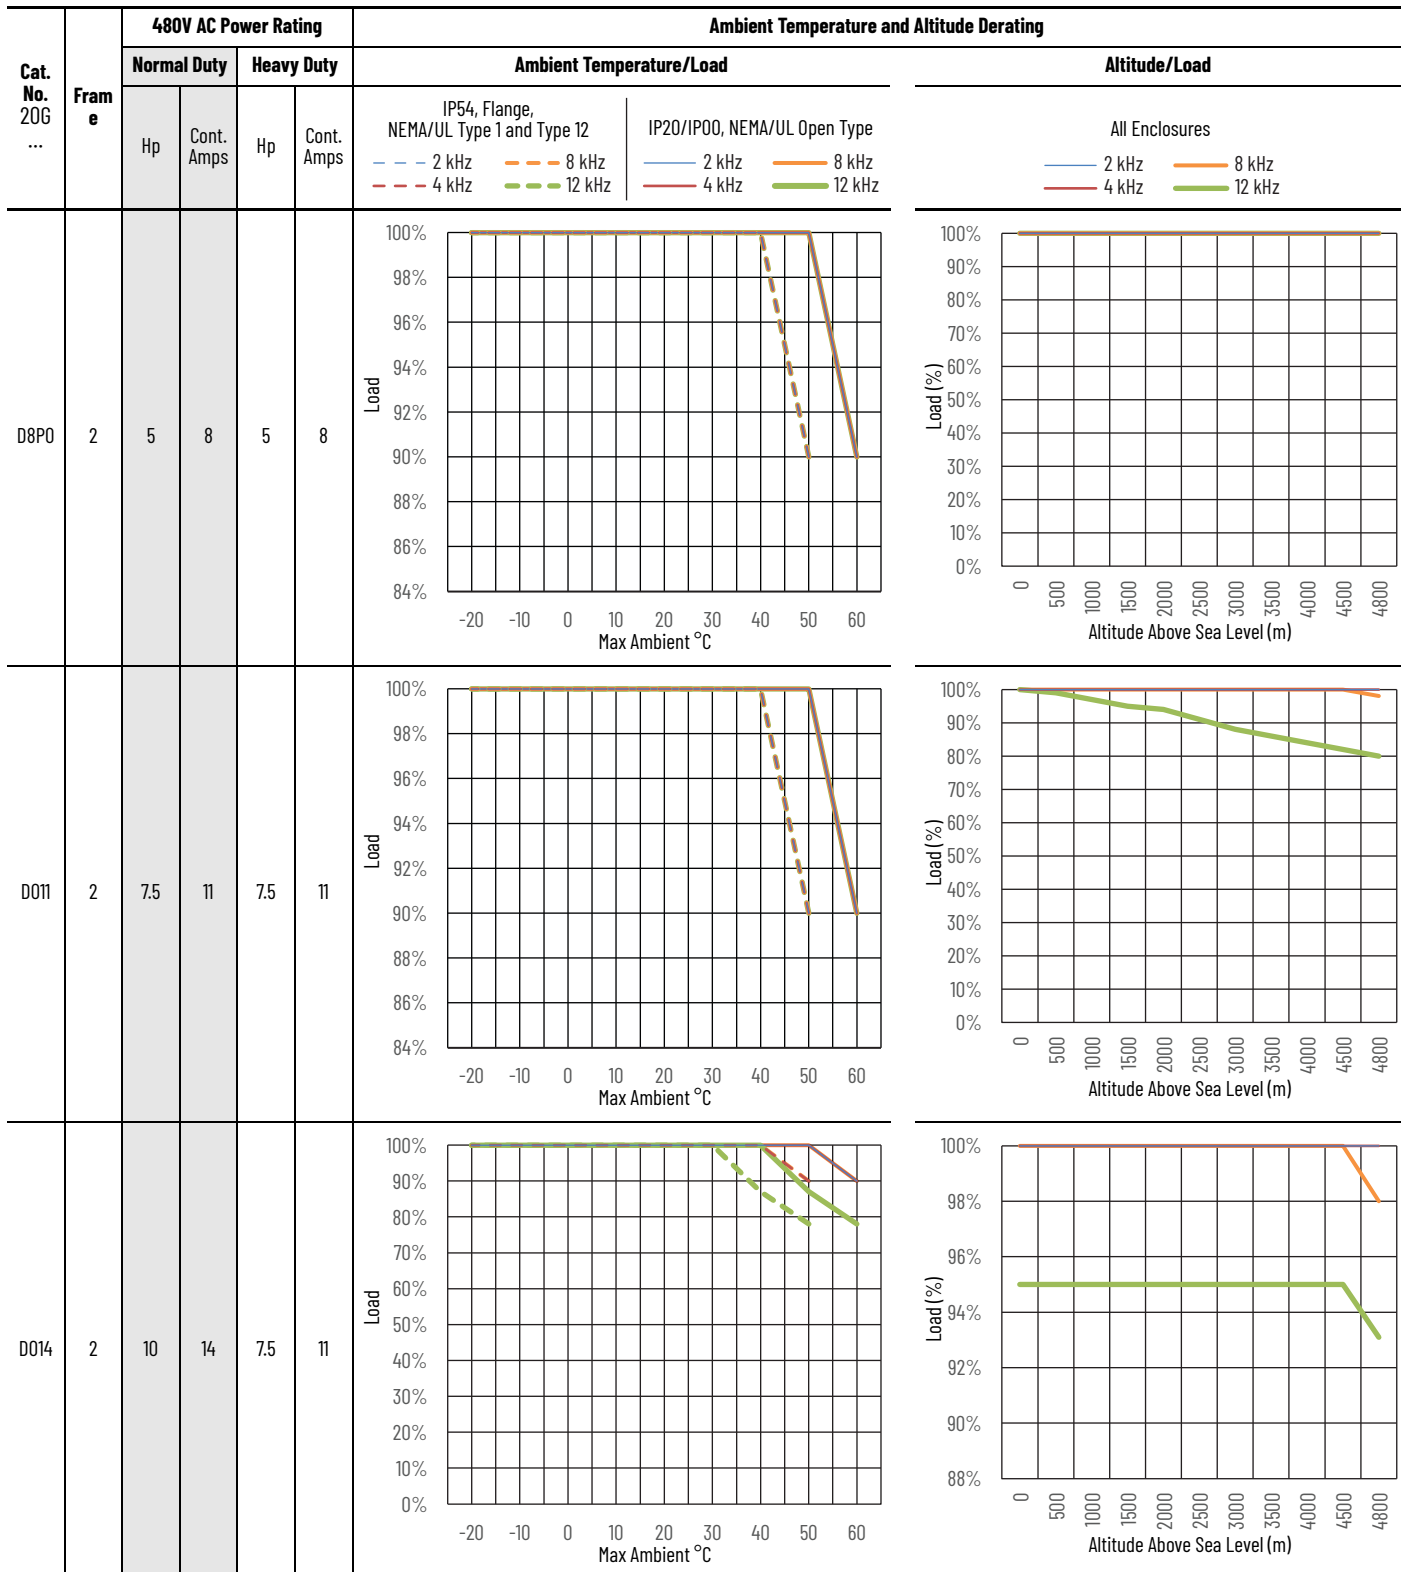

Temperature and Altitude Derating—480V AC Frames 1...7 (Continued)

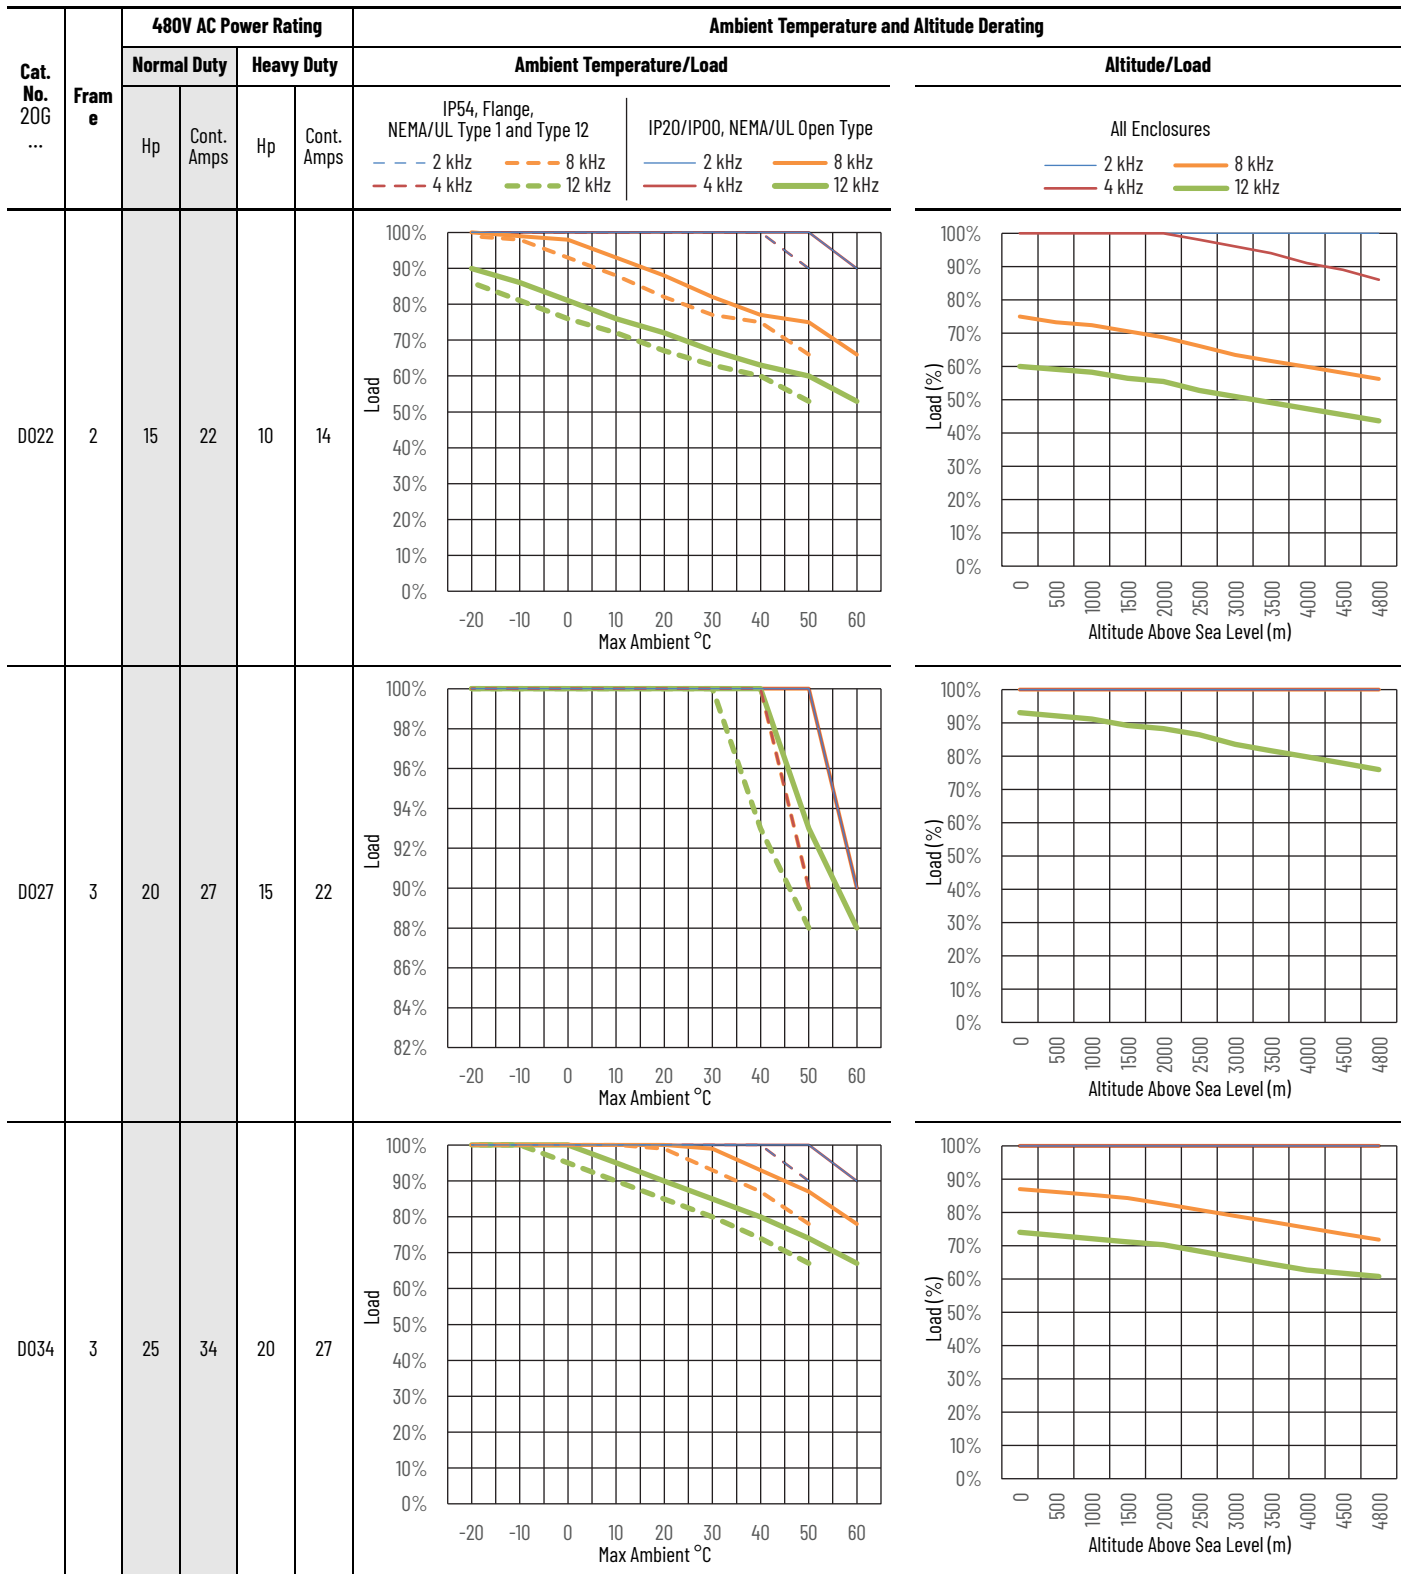

Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

Cat. No. 20G ...	Frame	480V AC Power Rating				Ambient Temperature and Altitude Derating					
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load	
		Hp	Cont. Amps	Hp	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures	
				--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz			
D040	3	30	40	25	34						
D052	4	40	52	30	40						
D053	3	40	53	30	40						


Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

Cat. No. 20G ...	Frame	480V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		Hp	Cont. Amps	Hp	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
						2 kHz	8 kHz	2 kHz	8 kHz	2 kHz	4 kHz	8 kHz	12 kHz
D065	4	50	65	40	52								
D066	4	50	66	40	52								
D077	5	60	77	50	65								

Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

Cat. No. 20G ...	Frame	480V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		Hp	Cont. Amps	Hp	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
				--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz		--- 2 kHz --- 8 kHz --- 4 kHz --- 12 kHz					
D078	4	60	78	50	65								
D096	5	75	96	60	77								
D125	6	100	125	75	96								

Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

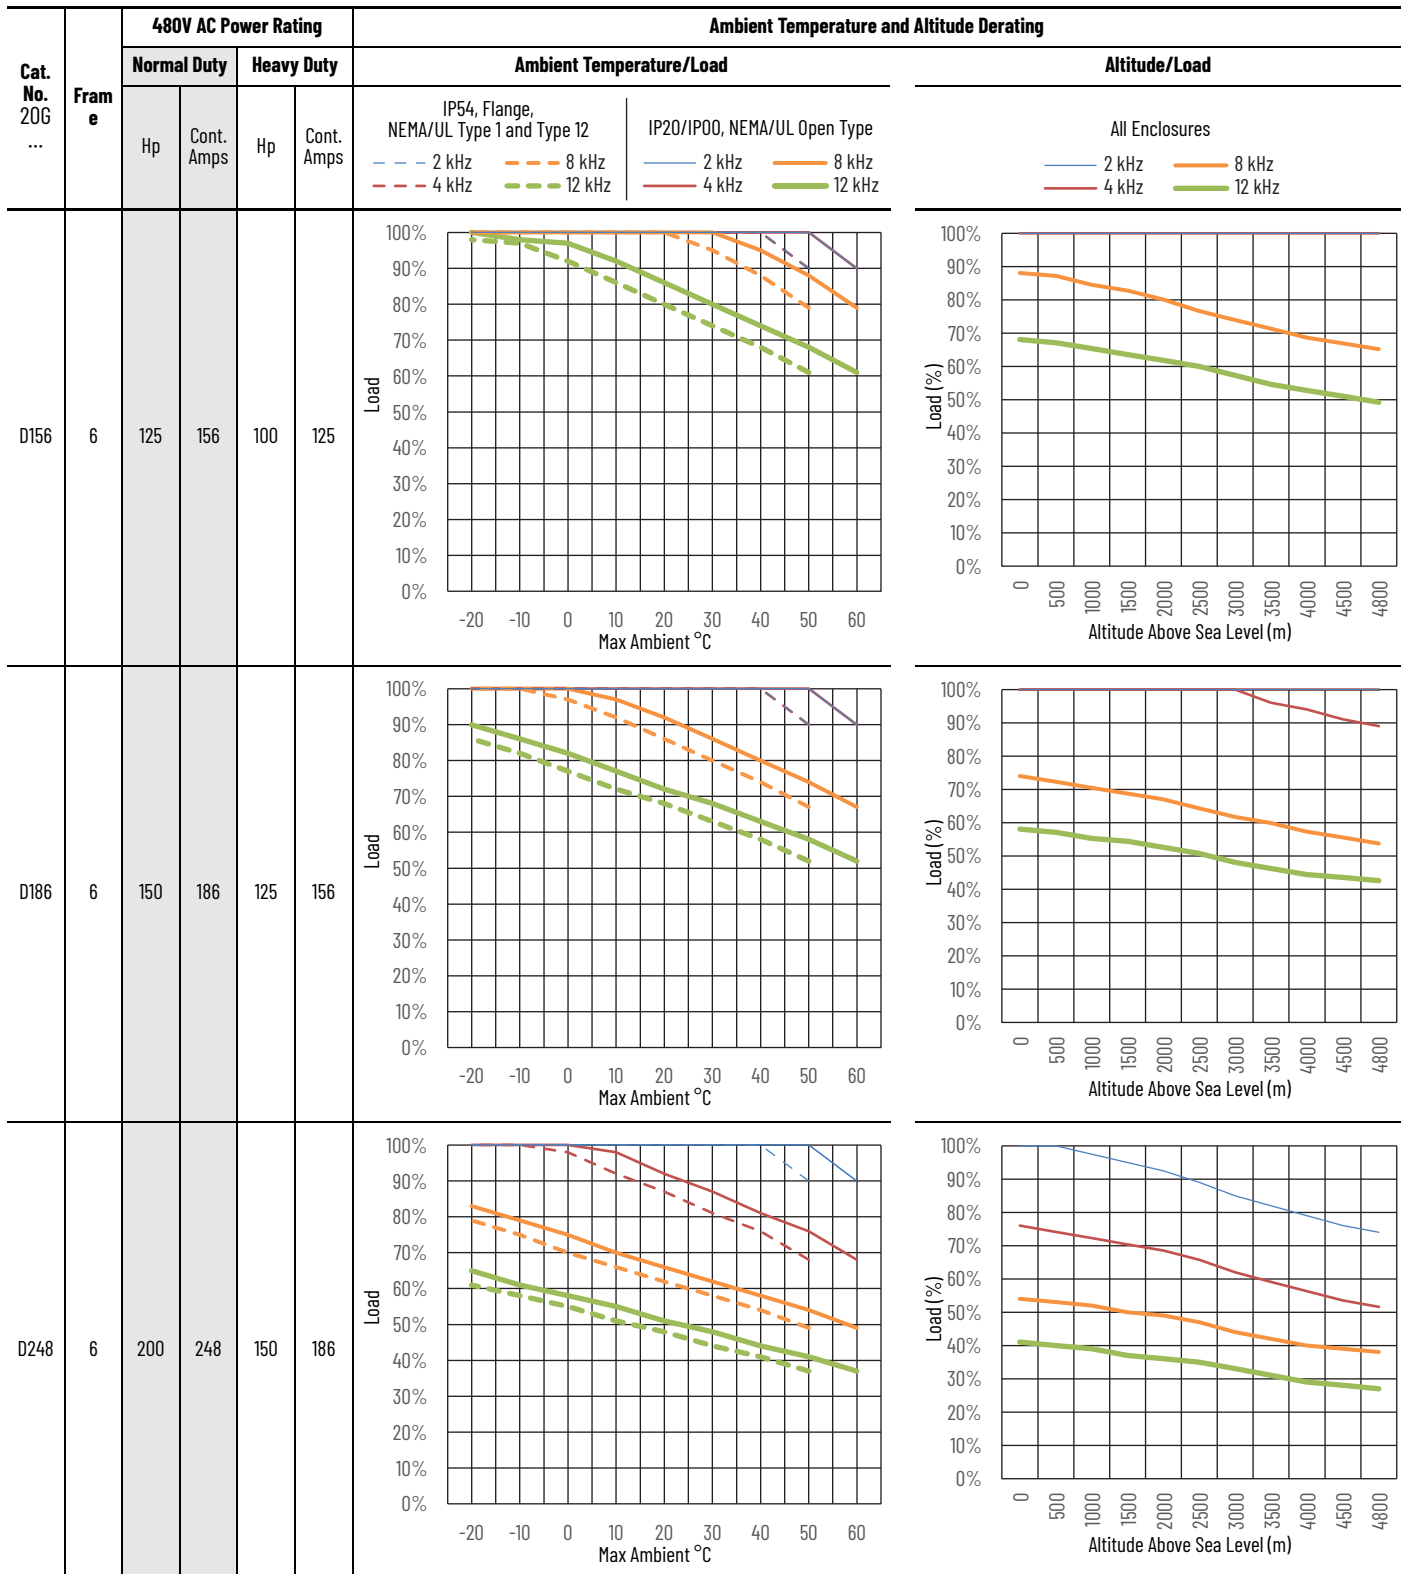

Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

Cat. No. 20G ...	Frame	480V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		Hp	Cont. Amps	Hp	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
						2 kHz	8 kHz	4 kHz	12 kHz	2 kHz	8 kHz	4 kHz	12 kHz
D302	7	250	302	200	248								
D361	7	300	361	250	302								

Temperature and Altitude Derating—480V AC Frames 1..7 (Continued)

Cat. No. 20G ...	Frame	480V AC Power Rating				Ambient Temperature and Altitude Derating							
		Normal Duty		Heavy Duty		Ambient Temperature/Load				Altitude/Load			
		Hp	Cont. Amps	Hp	Cont. Amps	IP54, Flange, NEMA/UL Type 1 and Type 12		IP20/IP00, NEMA/UL Open Type		All Enclosures			
						2 kHz	8 kHz	4 kHz	12 kHz	2 kHz	8 kHz	4 kHz	12 kHz
D415	7	350	415	300	361								
D477	7	400	477	300	361								

Minimum Dynamic Brake Resistance

The tables in this section show the minimum dynamic brake resistance when you use the internal dynamic braking transistor.

Brake Resistance for 400/480V Drives

Frame	400V					480V				
	ND kW	Catalog Code	Min Resistance	Max DB Current	Max Duty Cycle	ND Hp	Catalog Code	Min Resistance	Max DB Current	Max Duty Cycle
1	0.75	C2P1	79.0	10	0.453	1.0	D2P1	79.0	10	0.453
	1.5	C3P5	79.0	10	0.453	2.0	D3P4	79.0	10	0.453
	2.2	C5P0	79.0	10	0.453	3.0	D5P0	79.0	10	0.453
	4	C8P7	52.7	15	0.453	5.0	D8P0	52.7	15	0.453
	5.5	C011	31.6	25	0.453	7.5	D011	31.6	25	0.453
	7.5	C015	31.6	25	0.453	10	D014	31.6	25	0.453
2	0.75	C2P1	31.6	25	0.4844	1.0	D2P1	31.6	25	0.4844
	1.5	C3P5	31.6	25	0.4844	2.0	D3P4	31.6	25	0.4844
	2.2	C5P0	31.6	25	0.4844	3.0	D5P0	31.6	25	0.4844
	4	C8P7	31.6	25	0.4844	5.0	D8P0	31.6	25	0.4844
	5.5	C011	31.6	25	0.4844	7.5	D011	31.6	25	0.4844
	7.5	C015	31.6	25	0.4844	10	D014	31.6	25	0.4844
3	11	C022	22.6	34.9	0.5603	15	D022	22.6	34.9	0.5603
	15	C030	31.6	25	0.9857	20	D027	31.6	25	0.9857
	18.5	C037	31.6	25	0.9857	25	D034	31.6	25	0.9857
	22	C043	16.6	47.6	0.9857	30	D040	16.6	47.6	0.9857
	30 ⁽¹⁾	C06 ⁽¹⁾	15.8	50	0.9857	40 ⁽¹⁾	D053 ⁽¹⁾	15.8	50	0.9857
	4	30	C060	15.8	50	0.9392	40	D052	15.8	50
37		C072	15.8	50	0.9392	50	D065	15.8	50	0.9392
37 ⁽²⁾		C073 ⁽²⁾	12	65.8	0.9392	50 ⁽²⁾	D066 ⁽²⁾	12	65.8	0.9392
45		C086	12	65.8	0.9288	60	D078	12	65.8	0.9288
5	37 ⁽²⁾	C075 ⁽²⁾	7.9	100	0.8279	50 ⁽²⁾	D065 ⁽²⁾	7.9	100	0.8279
	45	C085	7.9	100	0.8279	60	D077	7.9	100	0.8279
	55	C104	7.9	100	0.8279	75	D096	7.9	100	0.8279
6	55 ⁽²⁾	C104 ⁽²⁾	3.3	239.4	0.912	75 ⁽²⁾	D096 ⁽²⁾	3.3	239.4	0.912
	75	C140	3.3	239.4	0.912	100	D125	3.3	239.4	0.912
	90	C170	3.3	239.4	0.912	125	D156	3.3	239.4	0.912
	110	C205	3.3	239.4	0.912	150	D186	3.3	239.4	0.912
	132	C260	3.3	239.4	0.912	200	D248	3.3	239.4	0.912
7	132 ⁽²⁾	C260 ⁽²⁾	2.4	329	0.78	200 ⁽²⁾	D248 ⁽²⁾	2.4	329	0.78
	160	C302	2.4	329	0.78	250	D302	2.4	329	0.78
	200	C367	2.4	329	0.78	300	D361	2.4	329	0.78
	250	C456	1.65	478.8	0.78	350	D415	1.65	478.8	0.78
	270	C477	1.65	478.8	0.78	400	D477	1.65	478.8	0.78

(1) IP20/IP00, NEMA/UL Open Type (enclosure code N).

(2) IP54, NEMA/UL Type 12 (enclosure code G).

Fuse and Circuit Breaker Ratings

The tables in this section provide recommended AC line input fuse and circuit breaker information. See the following Fuses and Circuit Breakers sections for CE and UL requirements. The size recommendations are based on 40 °C (104 °F) and the U.S. NEC. Other country, state, or local codes can require different ratings. DC link fuse recommendations for DC input drives are also provided.

Fuses

The recommended fuse types are listed here. Select a fuse rating within the range specified in the tables starting on [page 67](#)

- CE – Type gG fuses
- UL – Fast-acting Class J, T

IMPORTANT For maximum protection of the drive and its internal components, we recommend the use of fuses to other methods of circuit protection. Fuses reduce the risk of drive damage from power quality events and improves machine and process utilization.

Circuit Breakers

The non-fuse listings in the following tables include inverse time circuit breakers, and 140M/140MT self-protected combination motor controllers. If one of these methods are chosen for protection, the following requirements apply, for both UL and CE installations:

- 140M/140MT self-protected combination motor controllers are acceptable if the installation conforms with the requirements specified in the tables.
- Inverse time circuit breakers shall only be used with a fuse specified in the tables.

400 Volt AC and 540 Volt DC Input Protection Devices—Drive Frames 1..7

Applied Rating ⁽¹⁾	Frame ⁽²⁾	Sized For Normal Duty		Sized For Heavy Duty		Input Quantities		AC Input Protection Devices				Input Quantities		DC Input Protection ⁽¹²⁾			
		Cont. Output Amps		Output Overload Amps		Cont. AC Input		Fuse	Circuit Breaker ⁽⁶⁾		140M/140MT Type E Combination Motor Controller with Adjustable Current Range ⁽⁷⁾⁽⁸⁾	Cont. DC Input	Fuse Cat. No. 20-750-...	Fuse Holder Cat. No. 20-750-...			
		Cat. No.	1 Min	3 s	Cat. No.	1 Min	3 s		Max [A]	Min. Encl. Vol. [in. ³]					Min. Enclosure Volume [in. ³] ⁽¹⁰⁾	Amps	Fuse Cat. No. 20-750-...
400 Volt AC Input																	
0.37	1	1.3			2.3	3.2	0.8	1.2	2	4	15	—	M-xxx-B25 ⁽⁹⁾	3242	1.4	DCFUSE1-10A	DCFH-51
0.75	1	2.1	206...C2P1	2.3	3.2	3.9	1.3	1.9	3	6	15	—	M-xxx-B25 ⁽⁹⁾	3242	2.2	DCFUSE1-10A	DCFH-51
1.5	1	3.5	206...C3P5	3.9	5.3	5.5	2.1	3.1	4	10	15	—	M-xxx-B40 ⁽⁹⁾	3242	3.7	DCFUSE1-10A	DCFH-51
2.2	1	5.0	206...C6P0	5.5	7.5		3.1	4.5	6	10	20	—	M-xxx-B63 ⁽⁹⁾	3242	5.3	DCFUSE1-10A	DCFH-51
4.0	1	8.7	206...C8P7	9.6	13.1	9.6	3.1	4.5	6	15	20	—	M-xxx-B63 ⁽⁹⁾	3242	5.3	DCFUSE1-10A	DCFH-51
5.5	1	11.5	206...C011	12.7	17.3	13.1	5.4	7.8	10	20	30	—	M-xxx-C10 ⁽⁹⁾	3242	9.2	DCFUSE1-16A	DCFH-51
7.5	1	15.4	206...C015	16.9	23.1	17.3	7.1	10.3	15	25	45	—	M-xxx-C16 ⁽¹⁰⁾	3242	12.2	DCFUSE1-20A	DCFH-51
0.75	2	2.1	206...C2P1	3.1	3.7	3.1	1.3	1.9	3	4	15	—	M-xxx-B25 ⁽⁹⁾	3242	16.3	DCFUSE1-25A	DCFH-51
1.5	2	3.5	206...C3P5	5.2	6.3	5.2	2.1	3.1	4	7	15	—	M-xxx-B40 ⁽⁹⁾	3242	2.2	DCFUSE1-10A	DCFH-51
2.2	2	5.0	206...C6P0	7.5	9.0	7.5	3.1	4.5	6	10	20	—	M-xxx-B63 ⁽⁹⁾	3242	3.7	DCFUSE1-10A	DCFH-51
4.0	2	8.7	206...C8P7	13.0	15.6	13.0	5.4	7.8	10	15	30	—	M-xxx-C10 ⁽¹⁰⁾	3242	5.3	DCFUSE1-10A	DCFH-51
5.5	2	11.5	206...C011	17.2	20.7	17.2	7.1	10.3	15	20	45	—	M-xxx-C16 ⁽¹⁰⁾	3242	9.2	DCFUSE1-16A	DCFH-51
7.5	2	15.4	206...C015	18.9	23.1	17.3	7.1	10.3	15	20	45	—	M-xxx-C16 ⁽¹⁰⁾	3242	12.2	DCFUSE1-20A	DCFH-51
11	2	22	206...C022	24.2	33.0	24.3	9.6	13.8	20	30	60	—	M-xxx-C20 ⁽¹⁰⁾	3242	16.3	DCFUSE1-25A	DCFH-51
15	3	30	206...C030	33.0	45.0	33.0	13.6	19.7	25	45	80	—	M-F8E-C25	3242	23.2	DCFUSE1-40A	DCFH-NH1
18.5	3	37	206...C037	40.7	55.5	45.0	18.6	26.9	35	60	100	—	M-F8E-C25	4052	23.2	DCFUSE1-40A	DCFH-NH1
22	3	43	206...C043	47.3	64.5	55.5	22.9	33.1	45	70	110	—	M-F8E-C32	4052	31.7	DCFUSE3-63A	DCFH-NH1
30	4	60	206...C060	66.0	90.0	66.0	26.7	38.5	50	90	120	—	M-F8E-C45	4052	39.1	DCFUSE3-63A	DCFH-NH1
	4	60	206...C060	66.0	90.0	66.0	26.7	38.5	50	90	120	—	—	—	45.4	DCFUSE3-80A	DCFH-NH1
	4	60	206...C072	66.0	90.0	90.0	37.2	53.7	70	100	180	—	—	—	45.4	DCFUSE3-125A	DCFH-NH1
	4	60	206...C073	66.0	90.0	90.0	37.2	53.7	70	100	180	—	—	—	63.4	DCFUSE3-125A	DCFH-NH1
	3	61	206...C061	67.1	91.5		37.8	54.6	70	100	180	—	—	—	63.4	DCFUSE3-125A	DCFH-NH1
	4	72	206...C072	79.2	108.0	108.0	44.6	64.4	80	125	200	—	—	—	64.5	DCFUSE3-125A	DCFH-NH1
	5	73	206...C073	80.3	109.5	108.0	44.6	64.4	80	125	200	—	—	—	76.1	DCFUSE3-125A	DCFH-NH1
	4	73	206...C073	80.3	109.5		45.2	65.3	80	125	200	—	—	—	76.1	DCFUSE3S-160A	DCFH-NH1
	5	85	206...C085	93.5	127.5	127.5	52.7	76.1	100	150	250	—	—	—	77.1	DCFUSE3-125A	DCFH-NH1
	4	86	206...C086	94.6	129.0		53.3	77.0	100	150	250	—	—	—	89.8	DCFUSE3S-160A	DCFH-NH1
	5	104	206...C104	114.4	156.0	156.0	64.5	93.1	125	200	300	—	—	—	90.9	DCFUSE3-160A	DCFH-NH1
	5	104	206...C140 ⁽³⁾	156.0	210.0	210.0	64.5	93.1	125	200	300	—	—	—	109.9	DCFUSE3S-200A	DCFH-NH1

400 Volt AC and 540 Volt DC Input Protection Devices—Drive Frames 1...7 (Continued)

Applied Rating (1)	Frame (2)	Sized For Normal Duty		Sized For Heavy Duty		Input Quantities		AC Input Protection Devices				Input Quantities		DC Input Protection (12)		
		Cont. Output Amps	Output Overload Amps	Cont. AC Input	Output Overload Amps	Cont. AC Input	Fuse	Circuit Breaker (6)	140M/140MT Type E Combination Motor Controller with Adjustable Current Range (7) (8)	Cont. DC Input	Fuse Holder Cat. No.	Cont. DC Input	Fuse Cat. No.	Cont. DC Input	Fuse Holder Cat. No.	
kW		1 Min	3 s	1 Min	3 s	kVA	Amps	Min [A] (4)	Max [A] (5)	Min. Encl. Vol. [in. 3]	Max [A]	Min Enclosure Volume [in. 3] (11)	Amps	20-750-...	20-750-...	
400 Volt AC Input																
75	6	140	206...C140	154.0	210.0	206...C170	210.0	255.0	88.9	128.3	175	300	400	151.4	DCFUSE3S-315A	DCFH-NH1
90	6	170	206...C170	187.0	255.0	206...C205	255.0	307.5	107.9	155.8	200	300	500	183.9	DCFUSE3S-315A	DCFH-NH1
110	6	205	206...C205	225.0	307.5	206...C260	307.5	390.0	130.1	187.8	250	400	600	221.7	DCFUSE3S-400A	DCFH-NH1
132	6	260	206...C260	286.0	390.0	206...C302	390.0	468.0	165.0	238.2	300	500	700	281.2	DCFUSE5S-500A	DCFH-NH2
	7													281.2	DCFUSE6S-500A	DCFH-NH3
160	7	302	206...C302	332.2	453.0	206...C367	453.0	550.5	191.7	276.7	350	600	900	326.7	DCFUSE6S-550A	DCFH-NH3
200	7	367	206...C367	403.5	550.5	206...C456	550.5	684.0	232.9	336.2	450	700	1100	397.0	DCFUSE6S-700A	DCFH-NH3
250	7	456	206...C456	501.6	684.0	206...C477	684.0	800	232.9	336.2	450	700	1100	397.0	DCFUSE6S-700A	DCFH-NH3
270	7	477	206...C477	524.7	715.5				289.5	417.8	600	800	1300	493.2	DCFUSE6S-900A	DCFH-NH3
									302.8	437.0	600	800	1300	516.0	DCFUSE6S-900A	DCFH-NH3

- (1) Applied rating refers to the motor that is connected to the drive. For example, a C022 drive can be used in Normal Duty mode on a 7.5 kW motor, or in Heavy Duty mode on a 11 kW motor. A C015 drive can be used in Heavy Duty mode on a 5.5 kW motor with the same ratings as a C011 drive. The drive can be programmed for either mode. For any given drive catalog number, Normal Duty mode provides higher continuous current but smaller overload current when compared to Heavy Duty mode. See parameter 0:36 [Duty Rating Cfg].
- (2) Only enclosure codes F, N, and R. See Product Rating Cross-reference in PowerFlex 755TS Products with TotalFORCE Control Installation Instructions, publication [750-IN119](#), for frame sizes of other enclosure types.
- (3) This drive is the next larger frame size.
- (4) For UL compliance - fast-acting class J (Bussmann DF-J) or fast-acting class T (Bussmann JJS) fuses only. Equivalent fuses of class J, T may be used if they have lower I_{peak} and I^2t ratings than the Bussmann JJS fuse. For CE compliance - type gR fuses (Bussmann 170M - size 00 to 3, IEC 60268 or DIN 43620, or FWP-610F-614F-622F) only. Minimum protection device size is the lowest rated device that supplies maximum protection without nuisance tripping. Max. source SCCR = 100 kA.
- (5) For UL compliance - fast-acting class J (Bussmann DF-J) or fast-acting class T (Bussmann JJS) fuses only. Equivalent fuses of class J, T may be used if they have lower I_{peak} and I^2t ratings than the Bussmann JJS fuse. For CE compliance - type gR fuses (Bussmann 170M - size 00 to 3, IEC 60268 or DIN 43620, or FWP-610F-614F-622F) only. Maximum protection device size is the highest rated device that supplies drive protection. Max. source SCCR = 100 kA.
- (6) Circuit breaker - inverse time breaker - must be used with a fuse specified in the table. For US NEC, minimum circuit breaker size is 125% of motor F.L.A. Ratings that are shown are maximum values.
- (7) Bulletin 140M/140MT with adjustable current range must have the current trip set to the minimum range so that the device does not trip.
- (8) Bulletin 140M/140MT is UL Listed for 480V/277V. Not UL Listed for use on 400V or 480V Delta/Delta, corner ground, or high-resistance ground systems.
- (9) Bulletin 140M/140MT must be Frame C (140M-C2E-xxx or 140MT-C3E-xxx) or Frame D (140M-D8E-xxx or 140MT-D9E-xxx). Max. source SCCR = 65 kA.
- (10) Bulletin 140M/140MT must be Frame E (140M-E8E-xxx or 140MT-E9E-xxx) or Frame F (140M-F8E-xxx). Max. source SCCR = 65 kA.
- (11) When using the Bulletin 140M/140MT, the drive must be installed in a ventilated or non-ventilated enclosure with the minimum volume that is specified in this column. Application-specific thermal considerations can require a larger enclosure.
- (12) DC fuses specified are UL recognized and CE compliant.

480 Volt AC and 650 Volt DC Input Protection Devices—Drive Frames 1...7

Applied Rating (1)	Frame (2)	Sized For Normal Duty		Sized For Heavy Duty		Input Quantities		AC Input Protection Devices				Input Quantities		DC Input Protection (12)		
		Output Overload Amps		Output Overload Amps		Cont. AC Input	Fuse	Circuit Breaker (6)		140M/140HT Type E Combination Motor Controller with Adjustable Current Range (7)(8)		Cont. DC Input	Fuse Cat. No. 20-750-...	Fuse Holder Cat. No. 20-750-...		
		Cat. No.	1 Min	3 s	Cat. No.			1 Min	3 s	Min. Encl. Vol. [in.³]	Max [A]				Min. Enclosure Volume [in.³] (10)	Cat. No.
Hp						kVA	Amps									
480 Volt AC Input																
0.5	1	1.1			2.3	3.2	0.8	1.0	2	2	15	—	M-xxx-B25 (9)	3242	DCFUSE1-10A	DCFH-51
1.0	1	2.1	206...D2P1	3.2	3.7	5.1	1.6	1.9	3	4	15	—	M-xxx-B25 (9)	3242	DCFUSE1-10A	DCFH-51
2.0	1	3.4	206...D3P4	3.7	5.5	7.5	2.6	3.1	4	7	15	—	M-xxx-B40 (9)	3242	DCFUSE1-10A	DCFH-51
3.0	1	5.0	206...D5P0	5.5	8.8	12.0	3.7	4.5	6	15	20	—	M-xxx-B63 (9)	3242	DCFUSE1-10A	DCFH-51
5.0	1	8.0	206...D8P0	8.8	12.1	16.5	6.0	7.2	9	15	30	—	M-xxx-C10 (9)	3242	DCFUSE1-16A	DCFH-51
7.5	1	11	206...D011	12.1	16.5	21.0	8.2	9.9	12	20	40	—	M-xxx-C16 (10)	3242	DCFUSE1-20A	DCFH-51
10	1	14	206...D014	15.4	21.0		10.5	12.6	15	30	50	—	M-xxx-C16 (10)	3242	DCFUSE1-25A	DCFH-51
1.0	2	2.1	206...D2P1	3.1	3.7	3.1	1.6	1.9	3	4	15	—	M-xxx-B25 (9)	3242	DCFUSE1-10A	DCFH-51
2.0	2	3.4	206...D3P4	5.1	6.1	6.1	2.6	3.1	4	7	15	—	M-xxx-B40 (9)	3242	DCFUSE1-10A	DCFH-51
3.0	2	5.0	206...D5P0	7.5	9.0	7.5	3.7	4.5	6	10	20	—	M-xxx-B63 (9)	3242	DCFUSE1-10A	DCFH-51
5.0	2	8.0	206...D8P0	12.0	14.4	12.0	6.0	7.2	9	15	30	—	M-xxx-C10 (10)	3242	DCFUSE1-16A	DCFH-51
7.5	2	11	206...D011	16.5	19.8	16.5	8.2	9.9	12	20	40	—	M-xxx-C16 (10)	3242	DCFUSE1-20A	DCFH-51
10	2	14	206...D014	15.4	21.0	21.0	8.2	9.9	12	20	40	—	M-xxx-C16 (10)	3242	DCFUSE1-20A	DCFH-51
15	2	22	206...D022	24.2	33.0		10.5	12.6	15	30	50	—	M-xxx-C16 (10)	3242	DCFUSE1-25A	DCFH-51
20	2	27	206...D027	29.7	40.5		16.5	19.9	25	45	80	—	M-F8E-C25	4052	DCFUSE3-40A	DCFH-NH1
25	2	34	206...D034	37.4	51.0		25.5	30.7	40	60	100	—	M-F8E-C25	4052	DCFUSE3-40A	DCFH-NH1
30	2	40	206...D040	44.0	60.0		30.0	36.1	45	80	120	—	M-F8E-C32	4052	DCFUSE3-50A	DCFH-NH1
40	2	52	206...D052	57.2	78.0		39.1	47.0	60	100	150	—	M-F8E-C45	4863	DCFUSE3-70A	DCFH-NH1
50	2	65	206...D065	71.5	97.5		48.8	58.7	80	125	175	—	M-F8E-C45	4863	DCFUSE3-100A	DCFH-NH1
60	2	77	206...D077	84.7	115.5		58.5	70.4	90	150	225	—	M-F8E-C45	4863	DCFUSE3-125A	DCFH-NH1
75	2	96	206...D096	105.6	144.0		72.1	86.7	110	200	275	—	M-F8E-C45	4863	DCFUSE3-200A	DCFH-NH1
100	2	125	206...D125	137.5	187.5		96.0	115.5	150	250	375	—	M-F8E-C45	4863	DCFUSE3-315A	DCFH-NH1

480 Volt AC and 650 Volt DC Input Protection Devices—Drive Frames 1...7 (Continued)

Applied Rating (1)	Frame (2)	Sized For Normal Duty		Sized For Heavy Duty		Input Quantities		AC Input Protection Devices				Input Quantities		DC Input Protection (12)		
		Cat. No.	Output Overload Amps 1 Min	3 s	Cat. No.	Output Overload Amps 1 Min	3 s	kVA	Amps	Fuse	Circuit Breaker (6)	140M/140MT Type E Combination Motor Controller with Adjustable Current Range (7) (8)	Cont. DC Input	Fuse Cat. No.	Fuse Holder Cat. No.	
Hp									Min [A] (4)	Max [A] (5)	Min. Encl. Vol. [in.³]	Max [A]	Min Enclosure Volume [in.³] (11)	Cont. DC Input	Fuse Cat. No.	Fuse Holder Cat. No.
480 Volt AC Input																
125	6	206...D156	171.6	234.0	206...D186	234.0	280.8	119.9	144.2	200	300	450	—	170.2	DCFUSE3S-316A	DCFH-NH1
150	6	206...D186	204.6	279.0	206...D248	279.0	372.0	142.9	171.9	225	400	550	—	203.0	DCFUSE3S-400A	DCFH-NH1
200	6	206...D248	272.8	372.0	206...D302	372.0	453.0	190.6	229.2	300	450	700	—	270.6	DCFUSE6S-500A	DCFH-NH2
	7				206...D302	372.0	453.0	190.6	229.2	300	450	700	—	270.6	DCFUSE6S-500A	DCFH-NH3
250	7	206...D302	332.2	453.0	206...D361	453.0	543.6	232.0	279.1	350	600	900	—	329.5	DCFUSE6S-550A	DCFH-NH3
300	7	206...D361	397.1	541.5	206...D415	541.5	649.8	277.3	333.6	450	700	1000	—	393.9	DCFUSE6S-700A	DCFH-NH3
	7				206...D477	541.5	649.8	277.3	333.6	450	700	1000	—	393.9	DCFUSE6S-700A	DCFH-NH3
350	7	206...D415	456.5	622.5				318.9	383.6	500	800	1200	—	452.8	DCFUSE6S-900A	DCFH-NH3
400	7	206...D477	524.7	715.5				366.6	440.9	600	800	1400	—	520.5	DCFUSE6S-900A	DCFH-NH3

(1) Applied rating refers to the motor that is connected to the drive. For example, a D022 drive can be used in Normal Duty mode on a 15 Hp motor, or in Heavy Duty mode on a 10HP motor. A D014 drive can be used in Heavy Duty mode on a 7.5 Hp motor with the same ratings as a D011 drive. The drive can be programmed for either mode. For any given catalog number, Normal Duty mode provides higher continuous current but smaller overload current compared to Heavy Duty mode. See parameter 0:36 [Duty Rating Cfg].

(2) Only enclosure codes F, N, and R. See Product Rating Cross-reference in PowerFlex 755TS Products with TotalFORCE Control Installation Instructions, publication 750-IN119, for frame sizes of other enclosure types.

(3) This drive is the next larger frame size.

(4) For UL compliance - fast-acting class J (Bussmann DF-J) or fast-acting class T (Bussmann JJS) fuses only. Equivalent fuses of class J, T may be used if they have lower I_{peak} and I²t ratings than the Bussmann JJS fuse. For CE compliance - type gR fuses (Bussmann 170M - size 00 to 3, IEC 60269 or DIN 43620, or FWP-610F-622F) only. Minimum protection device size is the lowest rated device that supplies maximum protection without nuisance tripping. Max. source SCCR = 100 kA.

(5) For UL compliance - fast-acting class J (Bussmann DF-J) or fast-acting class T (Bussmann JJS) fuses only. Equivalent fuses of class J, T may be used if they have lower I_{peak} and I²t ratings than the Bussmann JJS fuse. For CE compliance - type gR fuses (Bussmann 170M - size 00 to 3, IEC 60269 or DIN 43620, or FWP-610F-622F) only. Maximum protection device size is the highest rated device that supplies drive protection. Max. source SCCR = 100 kA.

(6) Circuit breaker - inverse time breaker - must be used with a fuse specified in the table. For US NEC, minimum circuit breaker size is 125% of motor F.L.A. Ratings that are shown are maximum values.

(7) Bulletin 140M/140MT with adjustable current range must have the current trip set to the minimum range so that the device does not trip.

(8) Bulletin 140M/140MT is UL Listed for 480V/277V. Not UL Listed for use on 400V or 480V Delta/Delta, corner ground, or high-resistance ground systems.

(9) Bulletin 140M/140MT must be Frame C (140M-C2E-xxx or 140MT-C3E-xxx) or Frame D (140M-D8E-xxx or 140MT-D9E-xxx). Max. source SCCR = 65 kA.

(10) Bulletin 140M/140MT must be Frame D (140M-D8E-xxx or 140MT-D9E-xxx) or Frame F (140M-F8E-xxx). Max. source SCCR = 65 kA.

(11) When using the Bulletin 140M/140MT, the drive must be installed in a ventilated or non-ventilated enclosure with the minimum volume that is specified in this column. Application-specific thermal considerations can require a larger enclosure.

(12) DC fuses specified are UL recognized and CE compliant.

Cable Considerations

This section provides information for cable types and routing.

Power Cable Types Acceptable for 400...690 Volt Installations

A variety of cable types are acceptable for drive installations. For an in-depth discussion of cable types, including a table of maximum motor cable lengths, refer to the PowerFlex 755TS Products with TotalFORCE Control Installation Instructions, publication [750-IN119](#) or Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives, publication [DRIVES-IN001](#).

Recommended Cable Design

Rating/Type	Description
600V 75 °C (167 °F)	<ul style="list-style-type: none"> Four tinned copper conductors with XLPE insulation. Copper braid/aluminum foil combination shield and tinned copper drain wire. PVC jacket. For surrounding air temperature greater than 50 °C, it is recommended to use wire with insulation rating of 90 °C or higher. However, conductor size shall be determined based on 75 °C rated wire.

Selection Considerations

This section provides information for input power cabling, motor cabling, and signal and I/O wiring.

Type		Cable Type(s)	Description	Min. Insulation Rating
Input Power (1) (2)	Standard	—	<ul style="list-style-type: none"> Three tinned copper conductors with XLPE insulation. Maximum 500 MCM conductors. Copper braid/aluminum foil combination shield and tinned copper drain wire, three drain wires per cable assembly. PVC jacket. 	600V, 75 °C (167 °F) ⁽³⁾
Motor	Standard	—	<ul style="list-style-type: none"> Three tinned copper conductors with XLPE insulation. Maximum 500 MCM conductors. Copper braid/aluminum foil combination shield and tinned copper drain wire, three drain wires per cable assembly. PVC jacket. 	400...600V systems: 600V, 75 °C (167 °F) 690V systems: 2000V, 90 °C (194 °F)
Signal (1) (4) (5)	Standard Analog I/O	—	0.750 mm ² (18 AWG), twisted pair, 100% shield w/drain.	300V, 75...90 °C (167...194 °F)
	Remote Pot	—	0.750 mm ² (18 AWG), 3 conductor, shielded.	
	Encoder/ Pulse I/O <30 m (100 ft)	Combined	0.196 mm ² (24 AWG) individually shielded pairs.	
	Encoder/ Pulse I/O 30...152 m (100...500 ft)	Signal	0.196 mm ² (24 AWG) individually shielded pairs.	
		Power	0.750 mm ² (18 AWG) in.dividually shielded pairs	
		Combined	0.330 mm ² (22 AWG), power is 0.500 mm ² (20 AWG) individually shielded pairs.	
Encoder/ Pulse I/O 152...259 m (500...850 ft.)	Signal	0.196 mm ² (24 AWG) individually shielded pairs.		
	Power	0.750 mm ² (18 AWG) individually shielded pairs.		
	Combined	0.750 mm ² (18 AWG) individually shielded pairs.		
Control Power	Un-shielded	—	Per US NEC or applicable national or local code.	300V, 60 °C (140 °F) ⁽⁶⁾
Digital I/O Safety Inputs Homing Inputs (1) (4) (5) (7)	Un-shielded	—	Per US NEC or applicable national or local code.	300V, 60 °C (140 °F) ⁽⁶⁾
	Shielded	Multi-conductor shielded cable	0.750 mm ² (18 AWG), 3 conductor, shielded.	

(1) Signal wires should be separated from power wires by at least 0.3 meters (1 foot).

(2) The use of shielded wire for AC input power may not be necessary but is always recommended.

(3) The minimum insulation rating for input power wire must be at least equal to the nominal system voltage rating.

(4) If the wires are short and contained within a cabinet which has no sensitive circuits, the use of shielded wire may not be necessary, but is always recommended.

(5) I/O terminals labeled '(—)' or 'Common' are not referenced to earth ground and are designed to greatly reduce common mode interference. Grounding these terminals can cause signal noise. For CE installations, 115V I/O must use shielded cable or have a cable length less than 30 m (98 ft).

(6) 75 °C (140 °F) rated wire or higher is recommended for installations where the surrounding air temperature exceeds 50 °C (122 °F).

(7) Ensure that 120V AC for I/O meets the requirements of overvoltage category II and is supplied with an isolation transformer from the mains power.

Motor Considerations

Due to the operational characteristics of AC variable frequency drives, motors with inverter grade insulation systems designed to meet or exceed NEMA MG1 Part 31.40.4.2 standards for resistance to spikes of 1600 volts are recommended.

Guidelines must be followed when using non-inverter grade motors to avoid premature motor failures. Refer to Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives, publication [DRIVES-IN001](#) for recommendations.

Dimensions and Weights

This section provides frame and rating cross-references.

400V AC and 480V AC

Cat. No.	Light Duty kW Output	Normal Duty kW Output	Heavy Duty kW Output	Cat. No.	Light Duty Hp Output	Normal Duty Hp Output	Heavy Duty Hp Output	Enclosure Code/Frame Size			
400 Volt				480 Volt				F	G	N	R
20G...C2P1	—	0.75 (0.75) ⁽¹⁾	0.75 (0.37) ⁽¹⁾	20G...D2P1	—	1 (1) ⁽¹⁾	1 (0.5) ⁽¹⁾	2	2	2	1
20G...C3P5	—	1.5 (1.5) ⁽¹⁾	1.5 (0.75) ⁽¹⁾	20G...D3P4	—	2 (2) ⁽¹⁾	2 (1.5) ⁽¹⁾				
20G...C5P0	—	2.2 (2.2) ⁽¹⁾	2.2 (1.5) ⁽¹⁾	20G...D5P0	—	3 (3) ⁽¹⁾	3 (2) ⁽¹⁾				
20G...C8P7	—	4 (4) ⁽¹⁾	4 (2.2) ⁽¹⁾	20G...D8P0	—	5 (5) ⁽¹⁾	5 (3) ⁽¹⁾				
20G...C011	—	5.5 (5.5) ⁽¹⁾	5.5 (4) ⁽¹⁾	20G...D011	—	7.5 (7.5) ⁽¹⁾	7.5 (5) ⁽¹⁾				
20G...C015	—	7.5 (7.5) ⁽¹⁾	5.5 (5.5) ⁽¹⁾	20G...D014	—	10 (10) ⁽¹⁾	7.5 (7.5) ⁽¹⁾				
20G...C022	—	11	7.5	20G...D022	—	15	10	3	3	3	
20G...C030	—	15	11	20G...D027	—	20	15				
20G...C037	—	18.5	15	20G...D034	—	25	20				
20G...C043	—	22	18.5	20G...D040	—	30	25	4	4	4	
20G...C060	—	30	22	20G...D052	—	40	30	—	—	3	
20G...C061	—	30	22	20G...D053	—	40	30	4	5	4	
20G...C072	—	37	30	20G...D065	—	50	40	—	4	—	
20G...C073	—	37	30	20G...D066	—	50	40	5	5	5	
20G...C085	—	45	37	20G...D077	—	60	50	4	—	4	—
20G...C086	—	45	37	20G...D078	—	60	50	5	6 ⁽²⁾	6	5
20G...C104	—	55	45	20G...D096	—	75	60				
20G...C140	—	75	55	20G...D125	—	100	75				
20G...C170	—	90	75	20G...D156	—	125	100	7 ⁽²⁾	7	7	
20G...C205	—	110	90	20G...D186	—	150	125				
20G...C260	—	132	110	20G...D248	—	200	150				
20G...C302	—	160	132	20G...D302	—	250	200	—	—	—	
20G...C367	—	200	160	20G...D361	—	300	250				
20G...C456	—	250	200	20G...D415	—	350	300				
20G...C477	—	270	200	20G...D477	—	400	300				

(1) Ratings in parenthesis are only applicable for Frame 1.

(2) For Frames 6 and 7, a user-installed flange kit (catalog number 20-750-TFLNG1-Fx) is available to convert a code N drive that provides a NEMA/UL Type 4X/12 back.

Enclosure Options

IMPORTANT IP00, IP20, and NEMA/UL Open Type PowerFlex 755TS drives must be installed in a clean, dry location. Contaminants such as oils, corrosive vapors and abrasive debris must be kept out of the enclosure. These enclosures are intended for indoor use primarily to provide a degree of protection against contact with enclosed equipment. These enclosures offer no protection against airborne contaminants. Refer to the following tables for an explanation of enclosure options and the environmental specifications found on [page 13](#). See Industry Installation Guidelines for Pulse Width Modulated (PWM) AC Drives, publication [DRIVES-AT003](#) for additional information.

Pollution Degree Ratings According to EN 61800-5-1


Pollution Degree	Description
1	No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.
2	Normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation is to be expected, when the drive is out of operation.
3	Conductive pollution or dry non-conductive pollution occurs, which becomes conductive due to condensation, which is to be expected.
4	The pollution generates persistent conductivity caused, for example by conductive dust or rain or snow.

Product Enclosure Ratings

Frames	Enclosure Type (Cat. No. Position 6)	Installed Accessory Kit	Front Side Rating		Back Side/Heat Sink Rating	
			Enclosure Type	Pollution Degree	Enclosure Type	Pollution Degree
1	R	None	IP20, NEMA/UL Open Type	1, 2	IP20, NEMA/UL Open Type	1, 2
		NEMA Type 1	IP20, NEMA/UL Type 1	1, 2	IP20, NEMA/UL Type 1	1, 2
2...5	N	None	IP20, NEMA/UL Open Type	1, 2	IP20, NEMA/UL Open Type	1, 2
		NEMA Type 1	IP20, NEMA/UL Type 1	1, 2	IP20, NEMA/UL Type 1	1, 2
		Flange	IP20, NEMA/UL Type 1	1, 2	IP20, NEMA/UL Type 1	1, 2
	F	None	IP20, NEMA/UL Open Type	1, 2	IP66, NEMA/UL Type 4X	1, 2, 3, 4
	G	None	IP54, NEMA/UL Type 12	1, 2, 3, 4	IP54, NEMA/UL Type 12	1, 2, 3, 4
6 and 7	N	None	IP00, NEMA/UL Open Type	1, 2	IP00, NEMA/UL Open Type Kit	1, 2
		NEMA Type 1	IP20, NEMA/UL Type 1	1, 2	IP20, NEMA/UL Type 1	1, 2
		NEMA Type 4X flange	IP00, NEMA/UL Open Type	1, 2	IP66, NEMA/UL Type 4X	1, 2, 3, 4
	G	None	IP54, NEMA/UL Type 12	1, 2, 3, 4	IP54, NEMA/UL Type 12	1, 2, 3, 4

Minimum Mounting Clearances

Specified vertical clearance requirements are intended to be from the PowerFlex 755TS product to the closest object that can restrict airflow through the cabinet. The product must be mounted in a vertical orientation as shown and must make full contact with the mounting surface. In addition, inlet air temperature must not exceed the product specification.

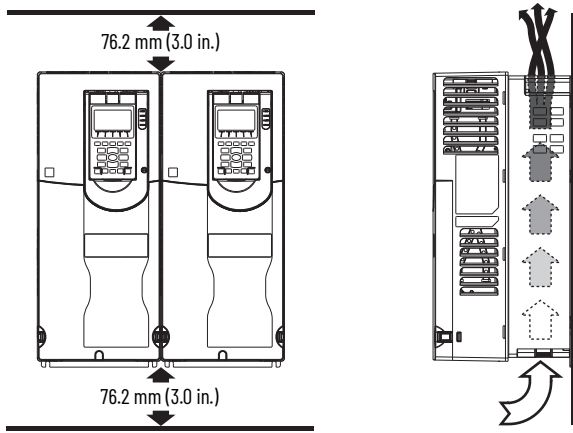

Airflow through the heat sink must not be impeded.
No clearance between wall mount products is required.

Approximate Weights

Drive	Frame Size	Drive Rating		Enclosure Code/Weight [kg (lb)]			
		kW (400V)	Hp (480V)	F	G	N	R
Standard AC input and common DC input	1	0.75...7.5	1...10				6 (13)
	2	0.75...11	1...15	8 (18)	8 (18)	8 (18)	
	3	15...30	20...40	12 (26)	12 (26)	12 (26)	
	4	30...45	40...60	14 (31)	14 (31)	14 (31)	
	5	37...55	50...75	21 (46)	21 (46)	21 (46)	
	6	55...132	75...200	48 (106)	100 (220)	48 (106)	
	7	132...270	200...400	72 (159)	132 (291)	82 (181)	


PowerFlex 755TS Drives Approximate Dimensions

This section provides the approximate dimensions for the drives.

Dimension Drawing Index

Frame	Description	Page
1	IP20, NEMA/UL Open Type	75
2	IP20, NEMA/UL Open Type	75
	Flange Mount	76
	IP54, NEMA/UL Type 12	77
3	IP20, NEMA/UL Open Type	77
	Flange Mount	78
	IP54, NEMA/UL Type 12	79
4	IP20, NEMA/UL Open Type	79
	Flange Mount	80
	IP54, NEMA/UL Type 12	81
5	IP20, NEMA/UL Open Type	81
	Flange Mount	82
	IP54, NEMA/UL Type 12	83
6	IP00, NEMA/UL Open Type	84
	Flange Mount	85
	IP54, NEMA/UL Type 12	86
7	IP00, NEMA/UL Open Type	87
	Flange Mount	88
	NEMA/UL Type 1	89
	IP54, NEMA/UL Type 12	90
1...6	NEMA/UL Type 1 Kit	91
1...5	NEMA/UL Type 1 Bottom View	92

Frame Type Approximate Dimensions [mm (in.)]

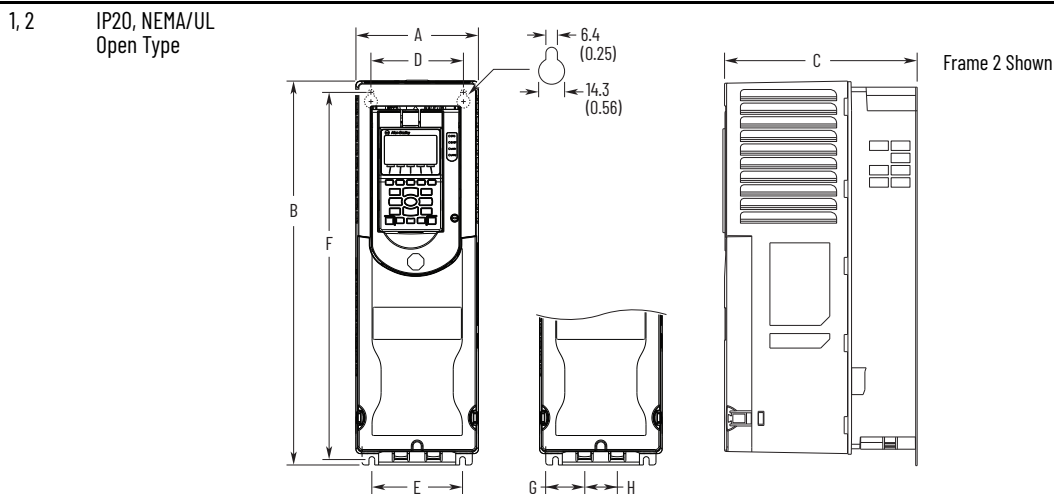


Frame	A	B	C	D	E	F	G	H
1 (1)	109.0 (4.3)	400.0 (15.7)	211.1 (8.3)	68.0 (2.7)	82.0 (3.2)	390.3 (15.4)	28.8 (1.1)	36.0 (1.4)
2	135.0 (5.3)	424.2 (16.7)	212.0 (8.3)	100.0 (3.9)	100.0 (3.94)	404.2 (15.9)	42.8 (1.7)	36.0 (1.4)

(1) With the supplied C3 bracket installed on the frame 1 drive, dimension B is 431.4 mm (17.0 in.).

Frame	Type	Approximate Dimensions [mm (in.)]
-------	------	-----------------------------------


2	Flange Mount	
---	--------------	--

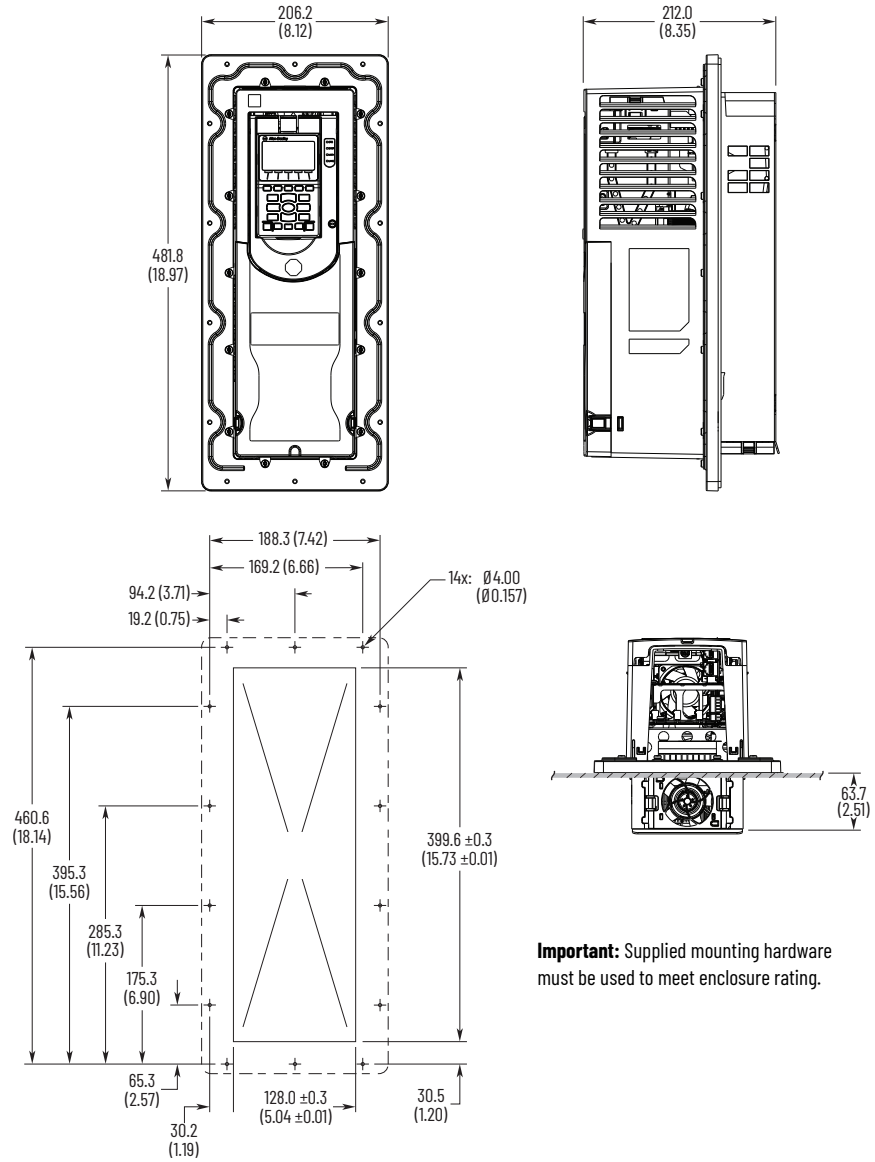


Important: Supplied mounting hardware must be used to meet enclosure rating.

Frame Type Approximate Dimensions [mm (in.)]

2 IP54, NEMA/UL Type 12




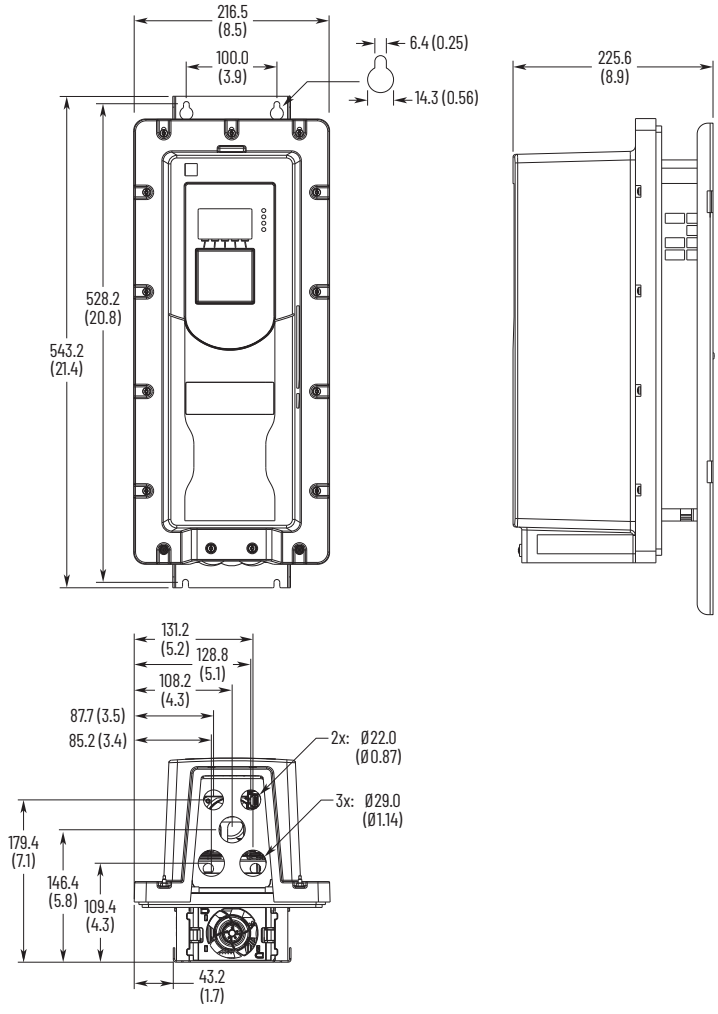


3 IP20, NEMA/UL Open Type

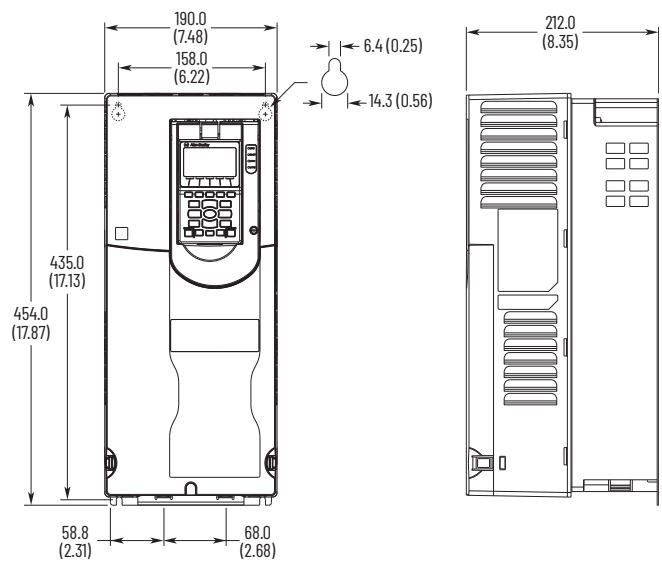

Frame	Type	Approximate Dimensions [mm (in.)]
-------	------	-----------------------------------


3	Flange Mount	
---	--------------	--

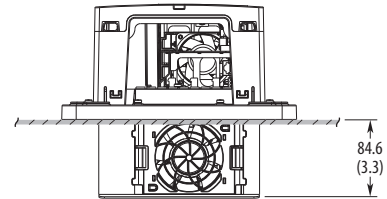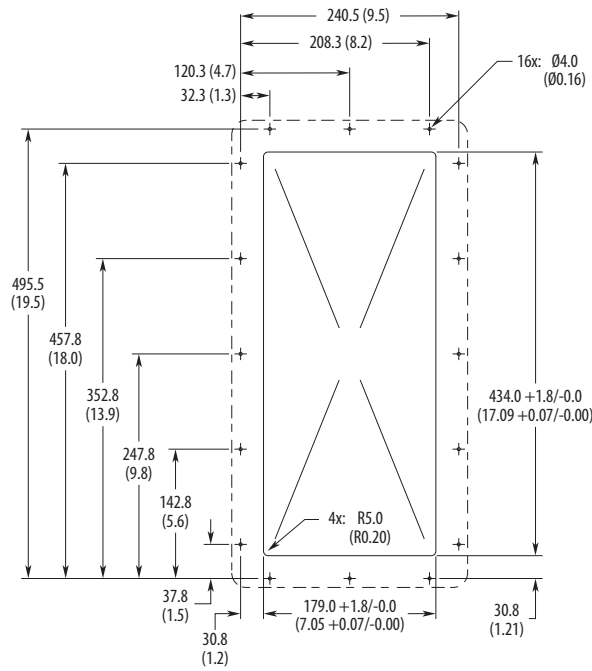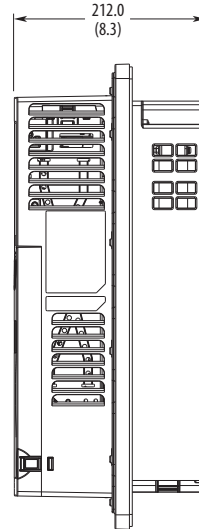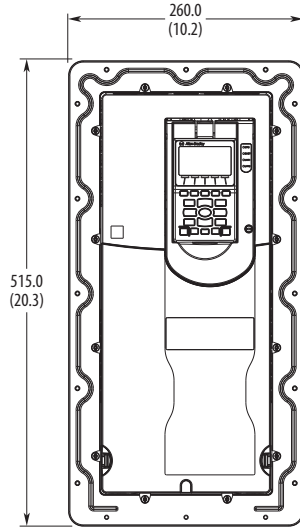


Important: Supplied mounting hardware must be used to meet enclosure rating.

Frame Type Approximate Dimensions [mm (in.)]

3 IP54, NEMA/UL Type 12




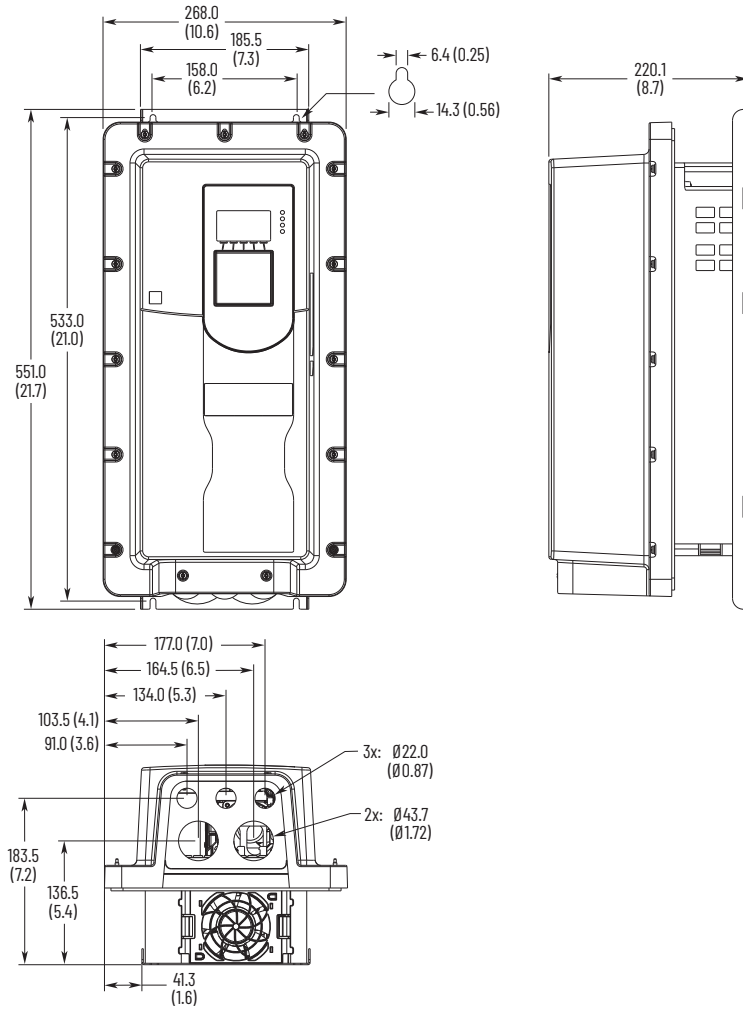


4 IP20, NEMA/UL Open Type

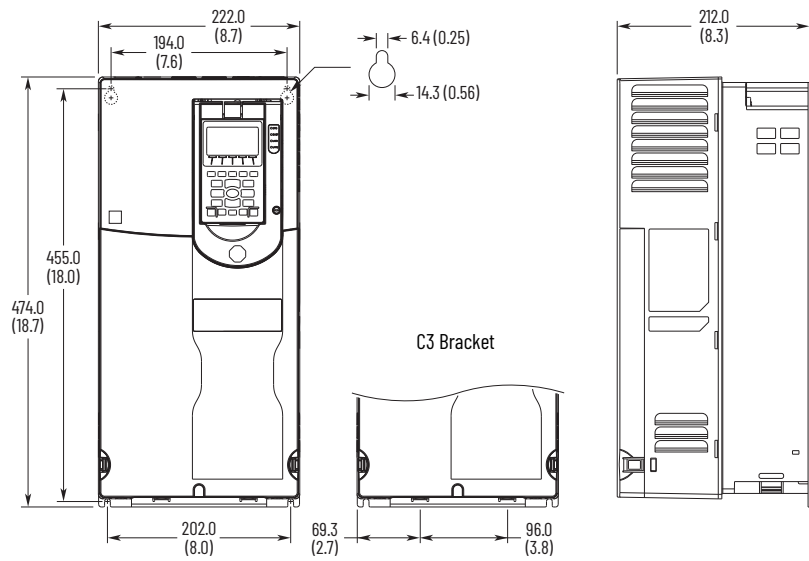

Frame Type Approximate Dimensions [mm (in.)]



4 Flange Mount

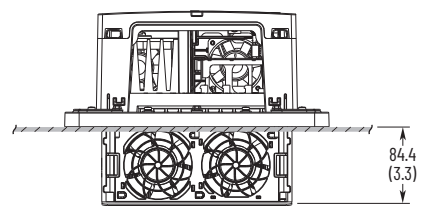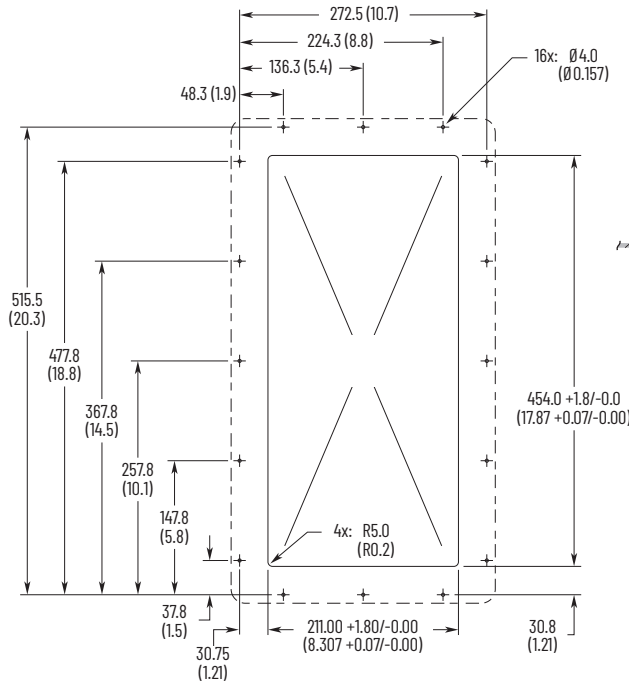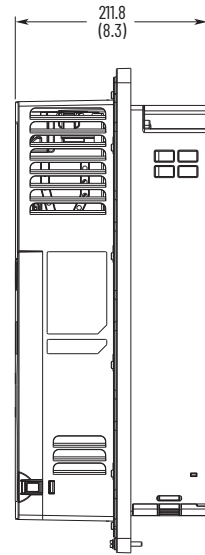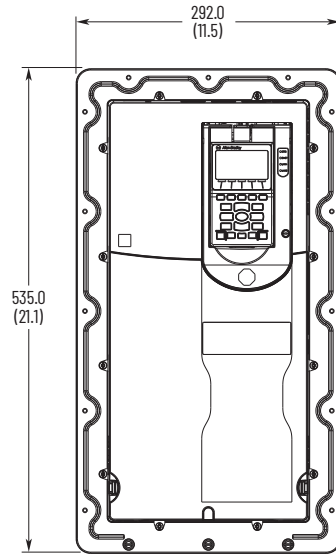


Important: Supplied mounting hardware must be used to meet enclosure rating.

Frame Type Approximate Dimensions [mm (in.)]

4 IP54, NEMA/UL Type 12



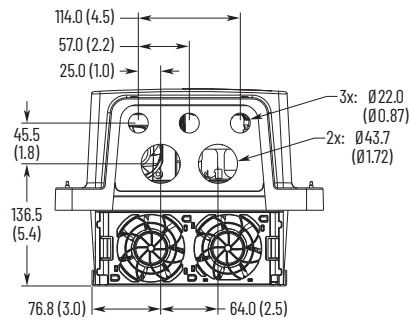
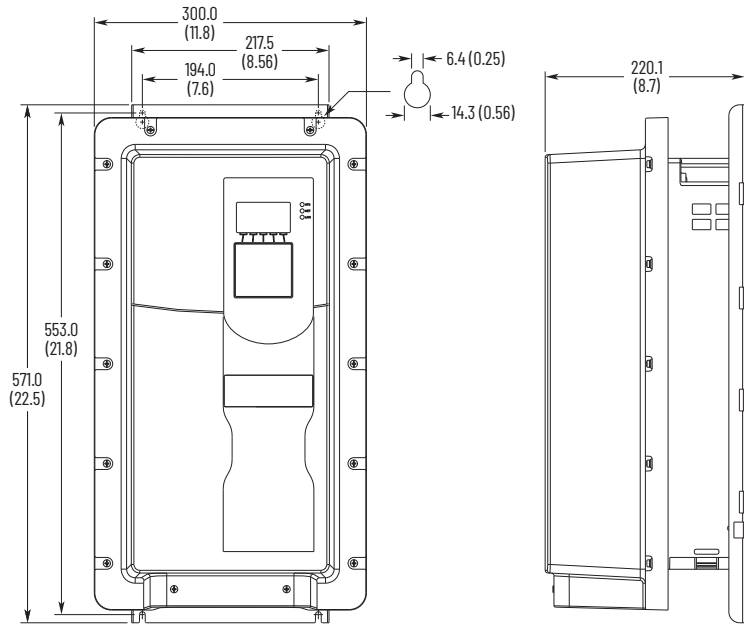


5 IP20, NEMA/UL Open Type

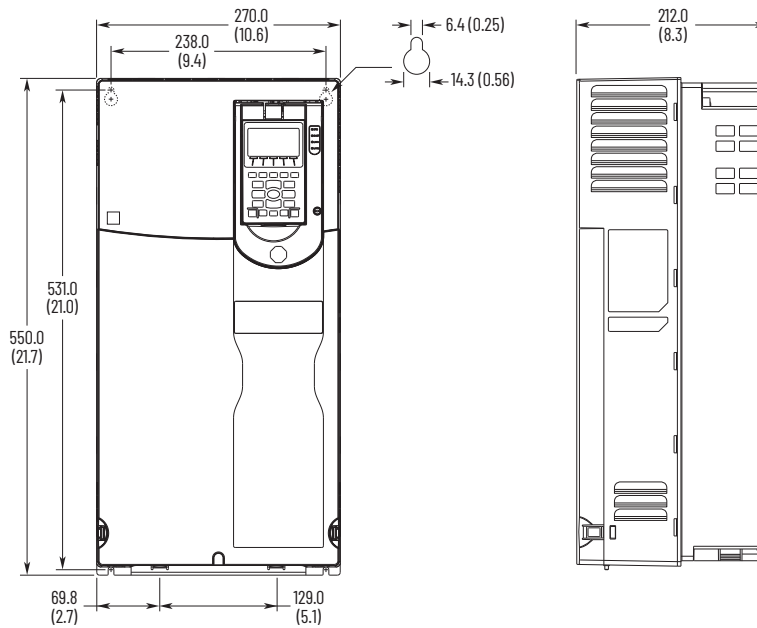

Frame Type Approximate Dimensions [mm (in.)]



5 Flange Mount

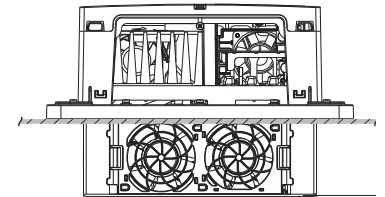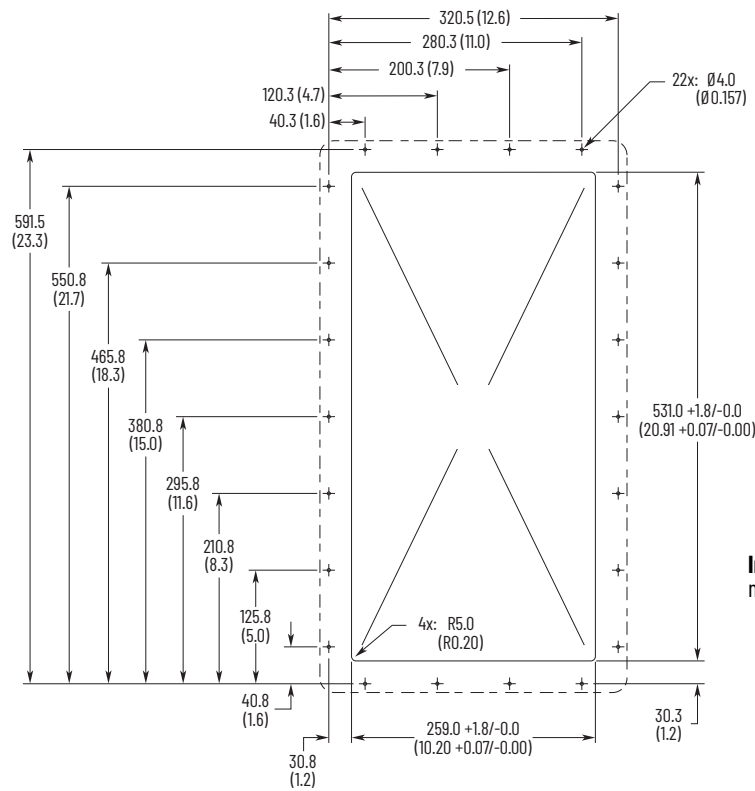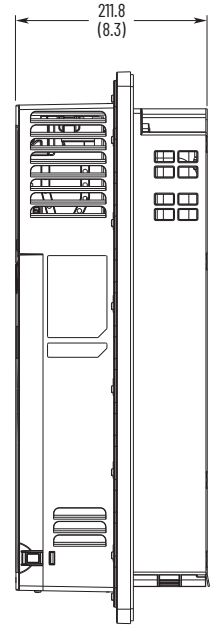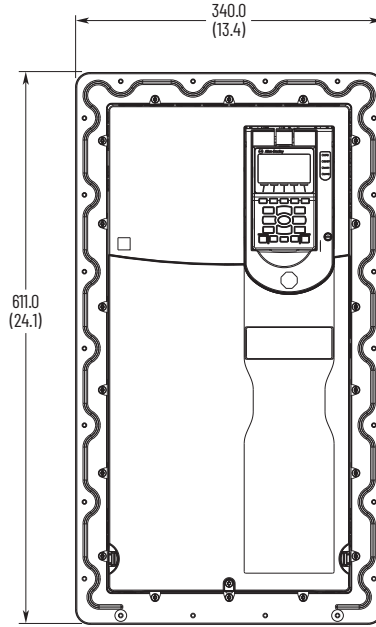

Important: Supplied mounting hardware must be used to meet enclosure rating.



Frame Type Approximate Dimensions [mm (in.)]

5 IP54, NEMA/UL Type 12

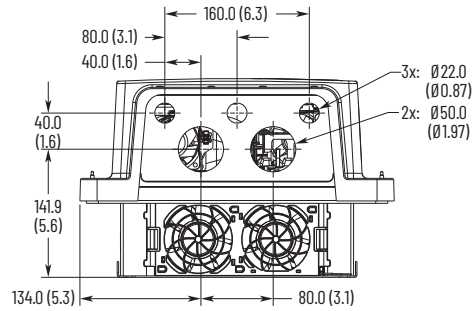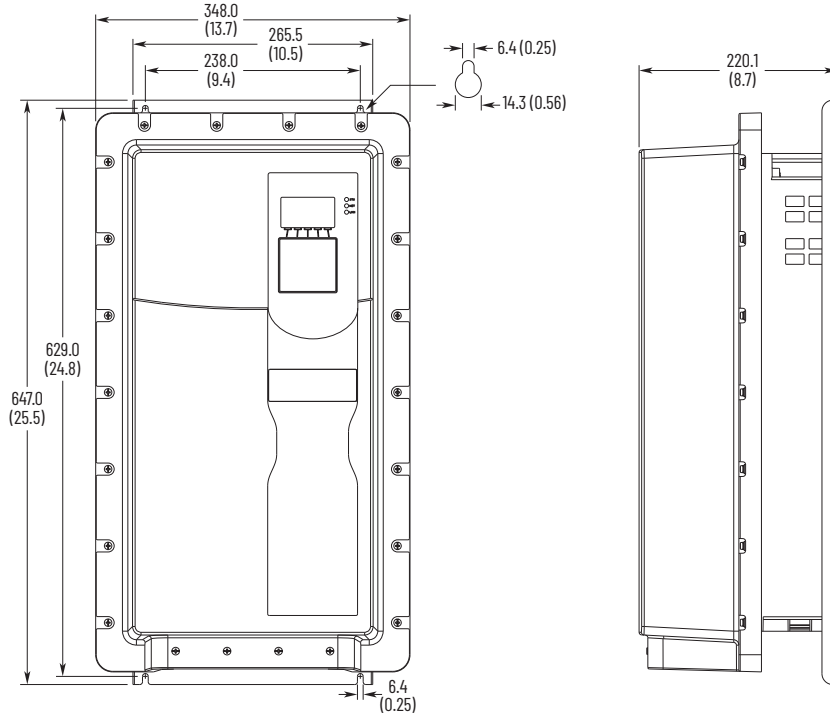

Frame Type Approximate Dimensions [mm (in.)]


6 IP00, NEMA/UL
Open Type

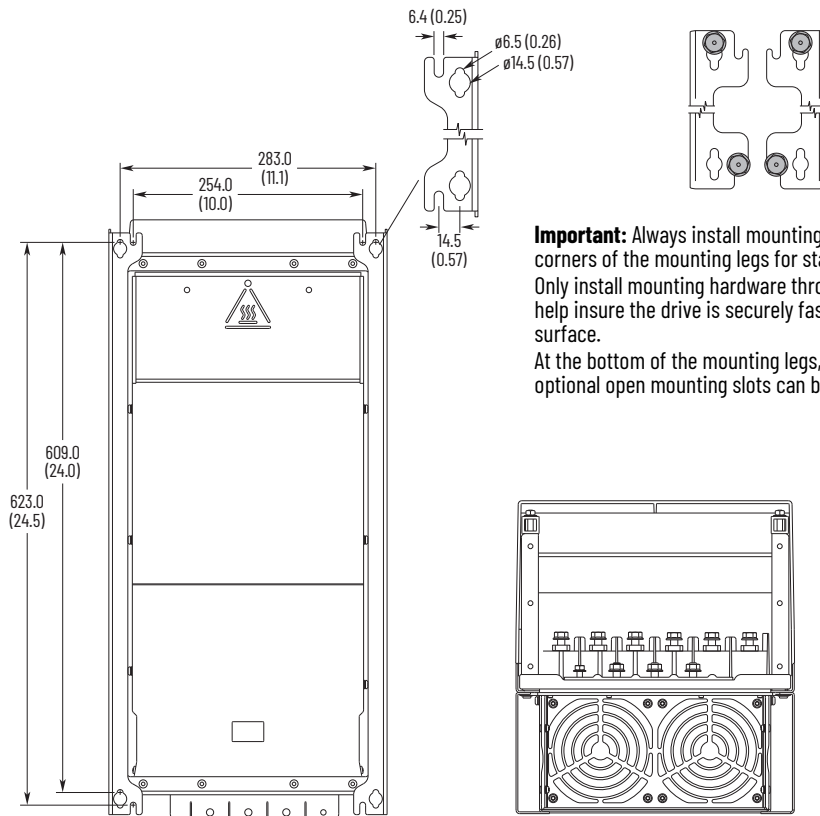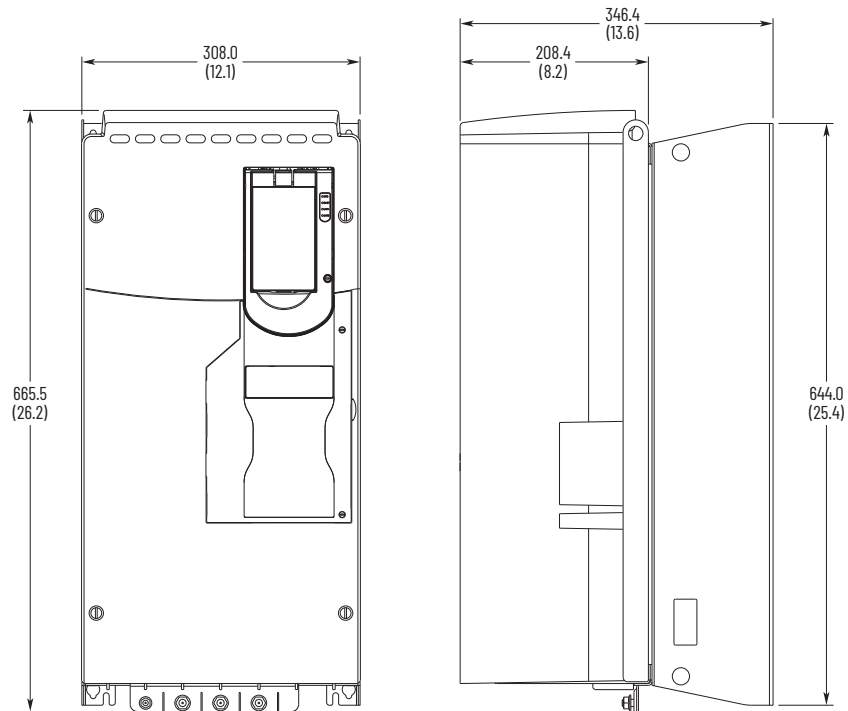

Important: Always install mounting hardware in all four corners of the mounting legs for stability. Only install mounting hardware through the top key holes to help insure the drive is securely fastened to the mounting surface. At the bottom of the mounting legs, either the key holes or optional open mounting slots can be used.

Frame Type Approximate Dimensions [mm (in.)]


6 Flange Mount

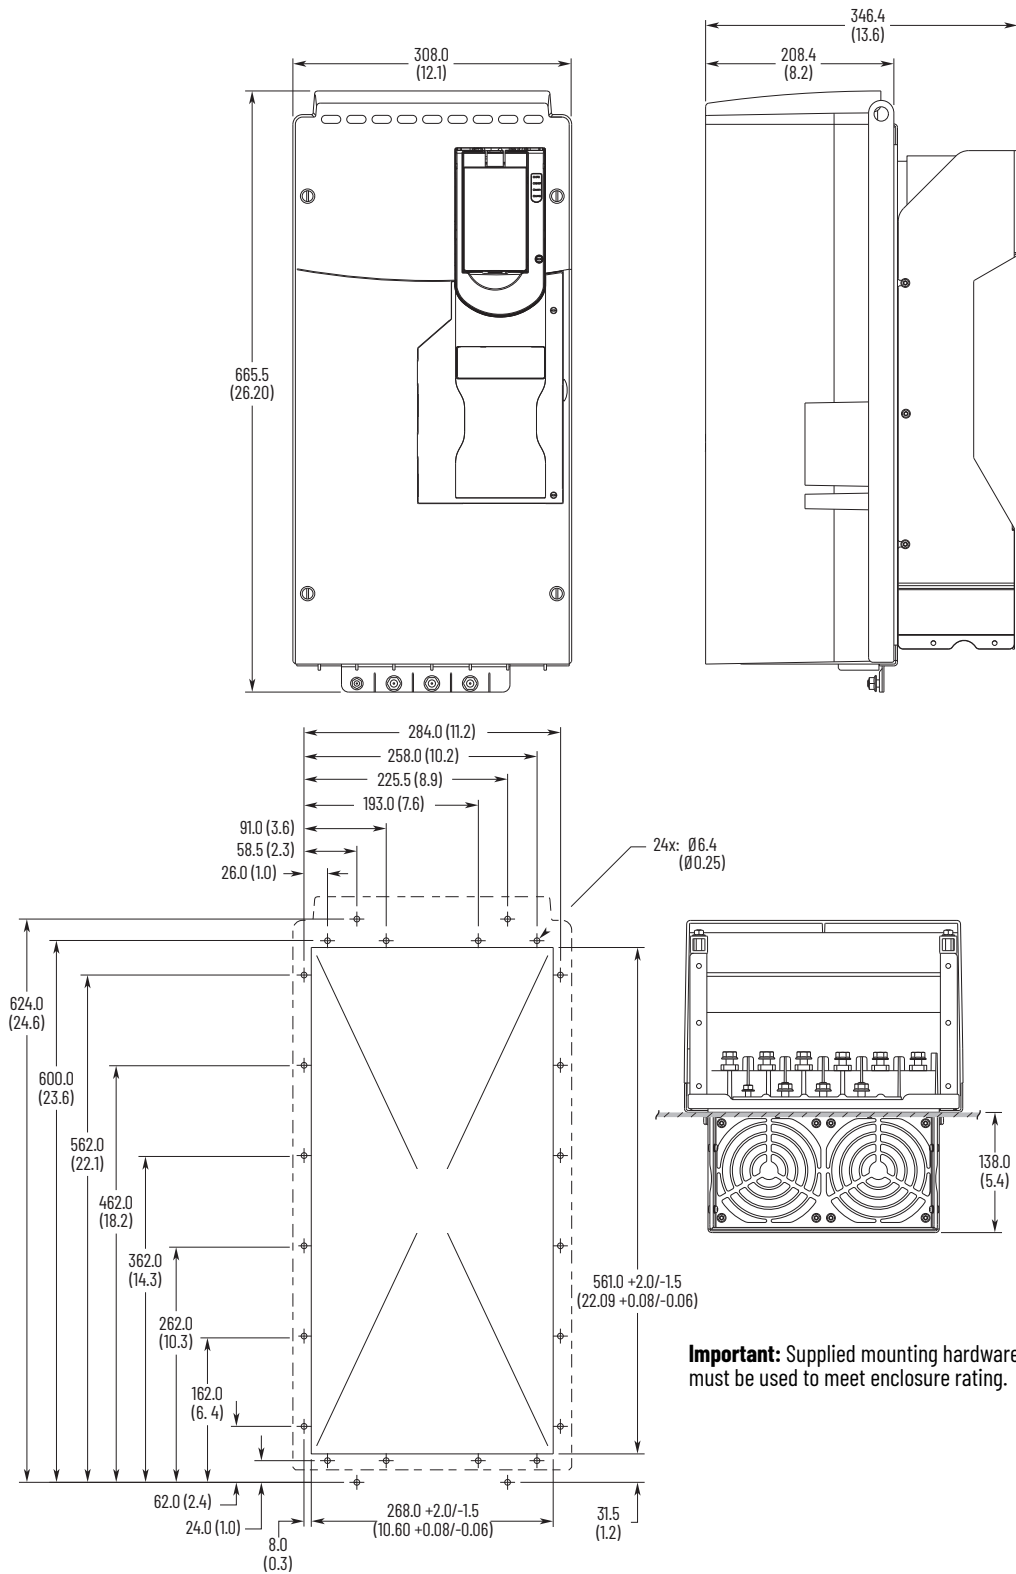

Important: Supplied mounting hardware must be used to meet enclosure rating.

Frame Type Approximate Dimensions [mm (in.)]


6 IP54, NEMA/UL Type 12

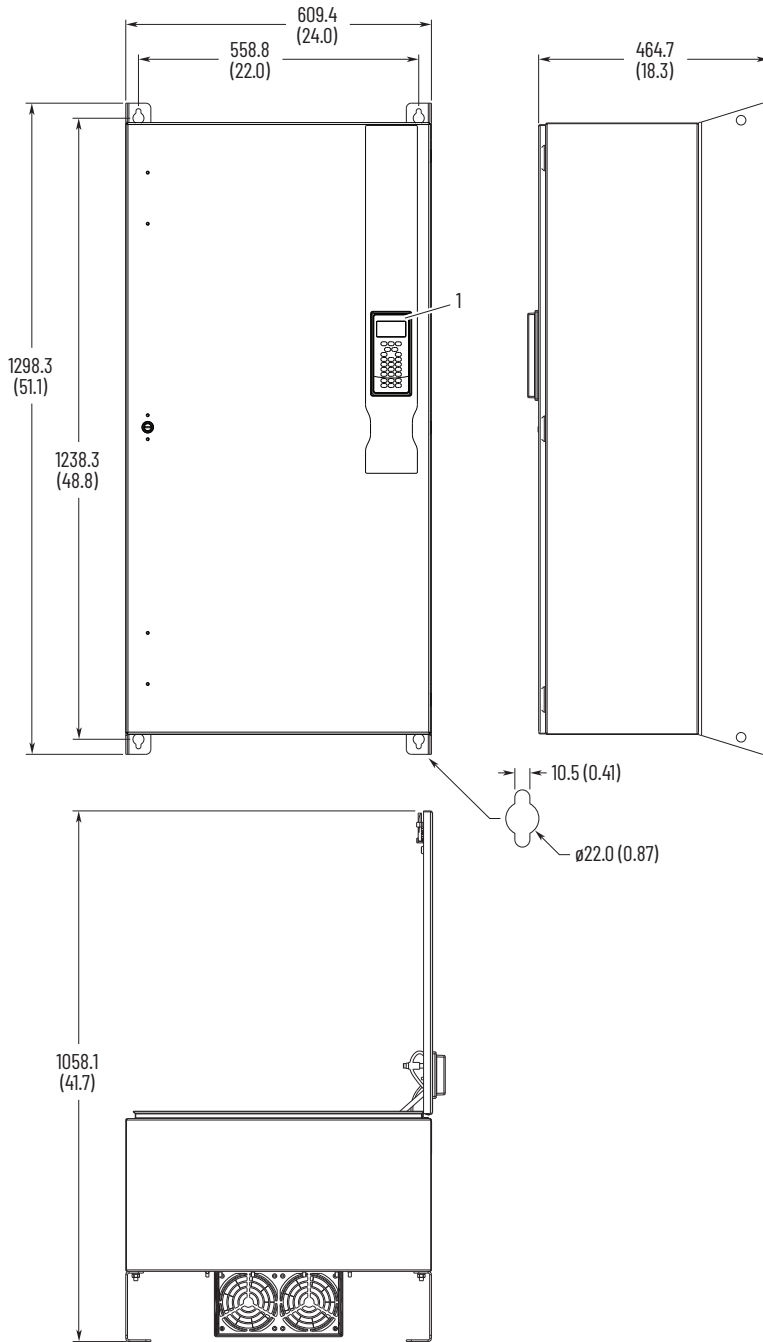

Item	Description
1	Shown with the field-installed 20-HIM-C6S.

Frame Type Approximate Dimensions [mm (in.)]


7 IPOO, NEMA/UL
Open Type

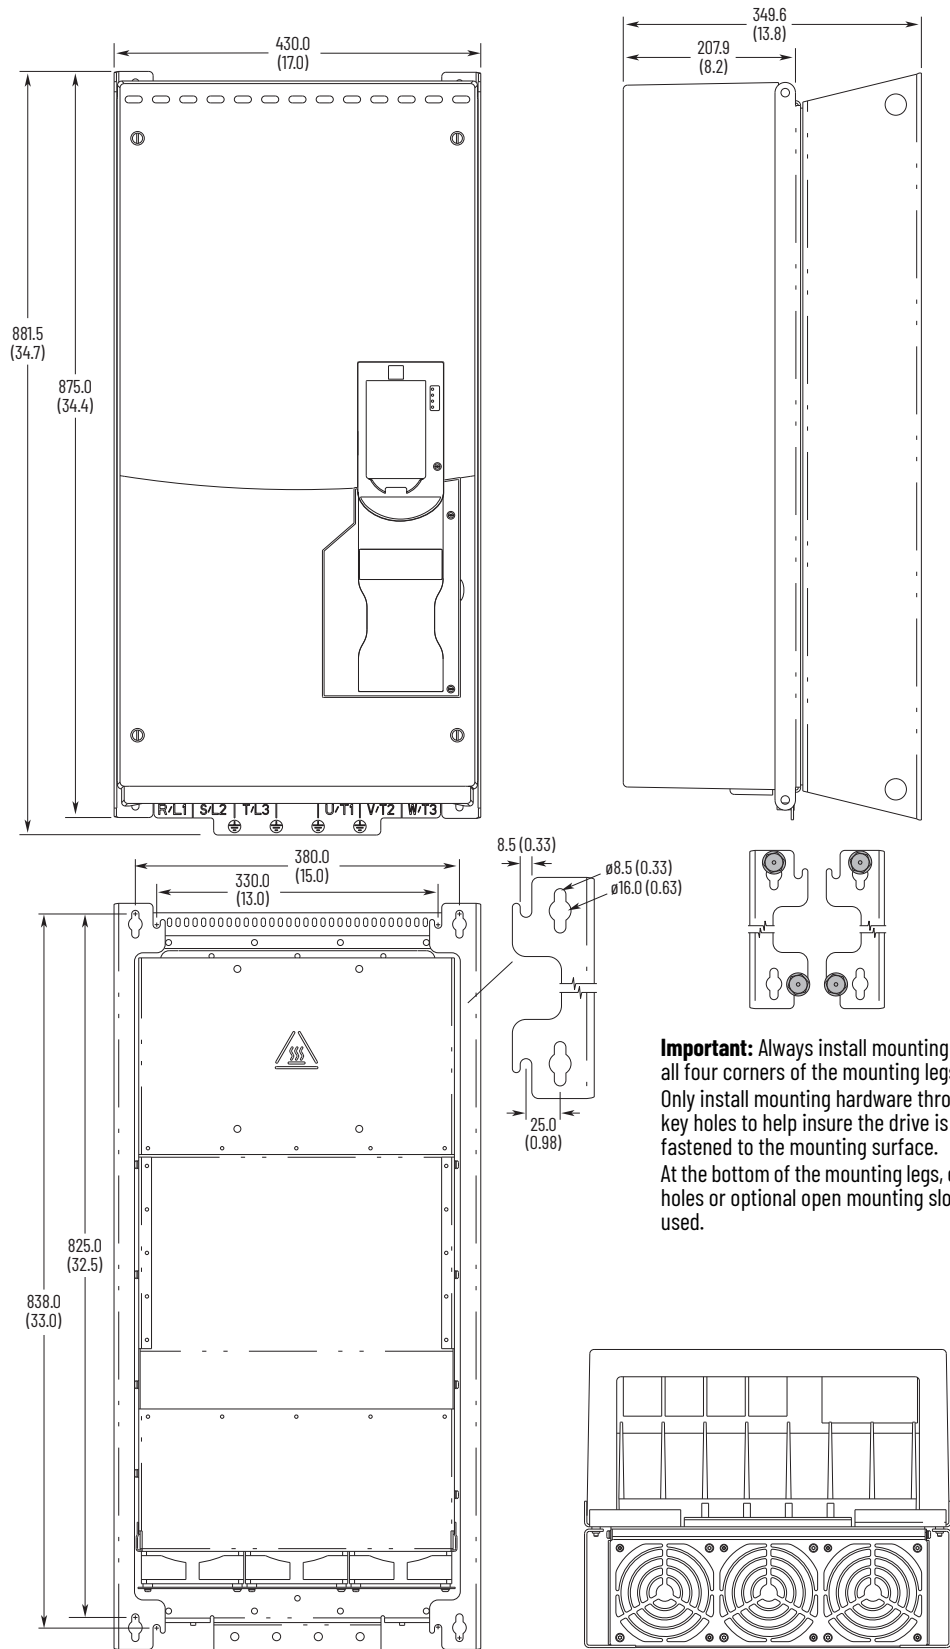

Important: Always install mounting hardware in all four corners of the mounting legs for stability. Only install mounting hardware through the top key holes to help insure the drive is securely fastened to the mounting surface. At the bottom of the mounting legs, either the key holes or optional open mounting slots can be used.


Frame Type Approximate Dimensions [mm (in.)]

7 Flange Mount

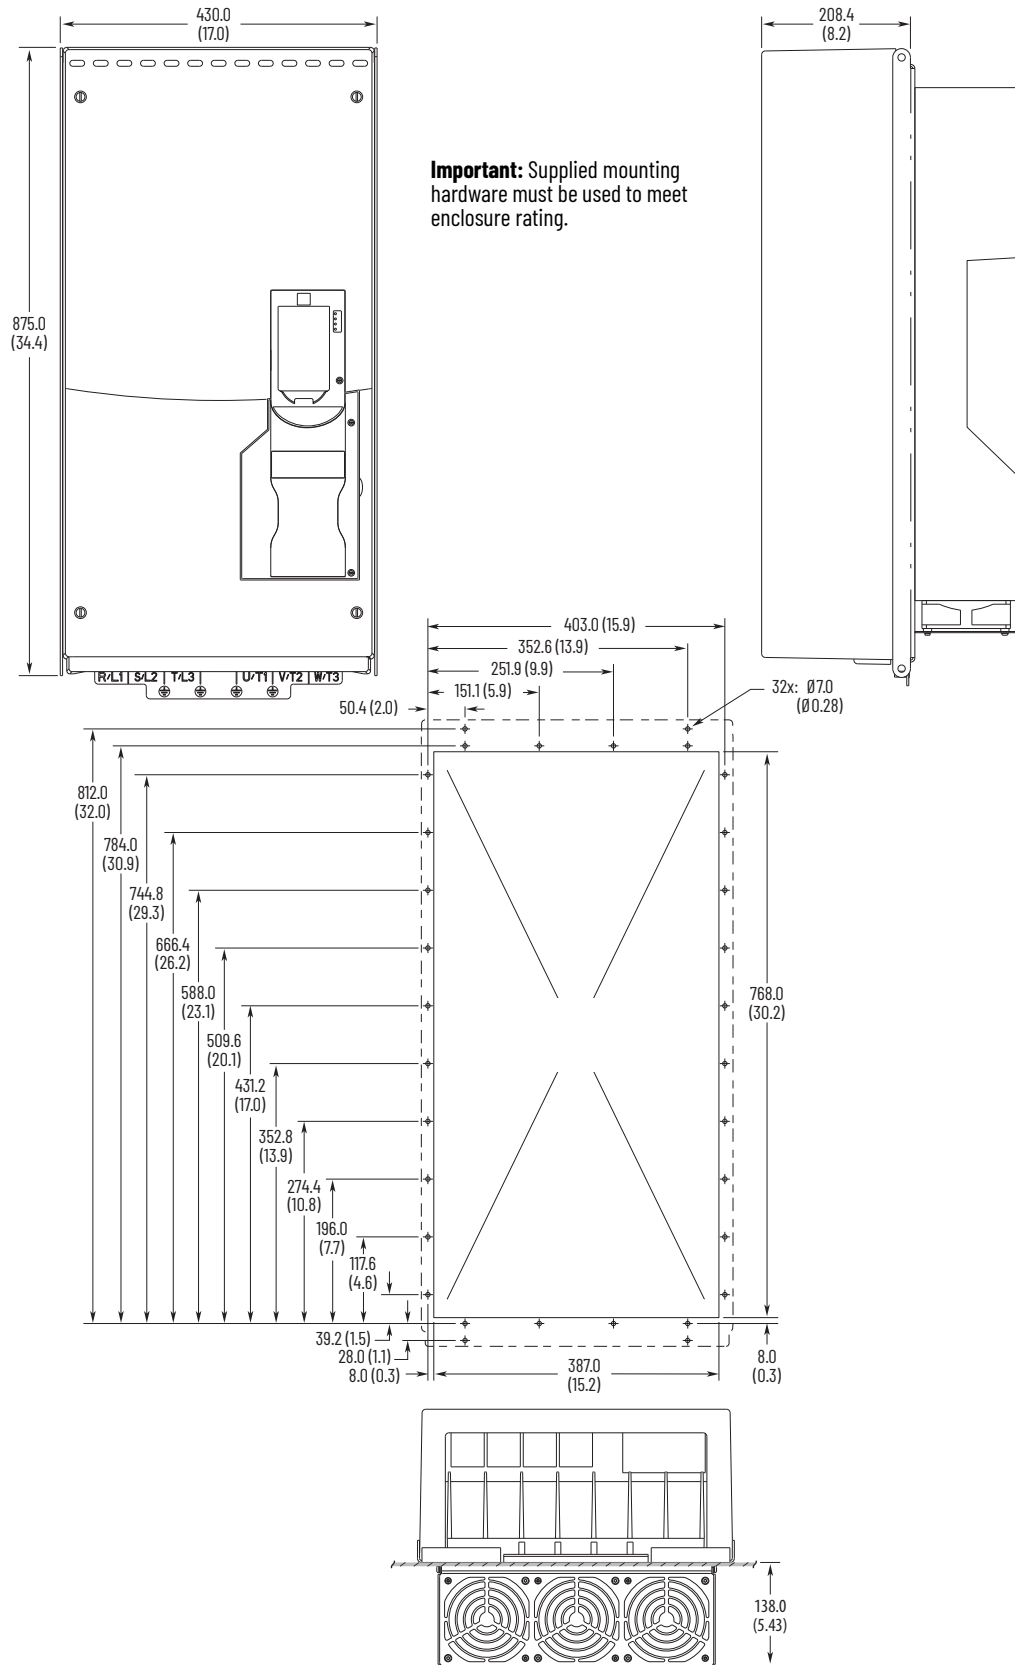


Frame Type Approximate Dimensions [mm (in.)]

7 NEMA/UL Type 1

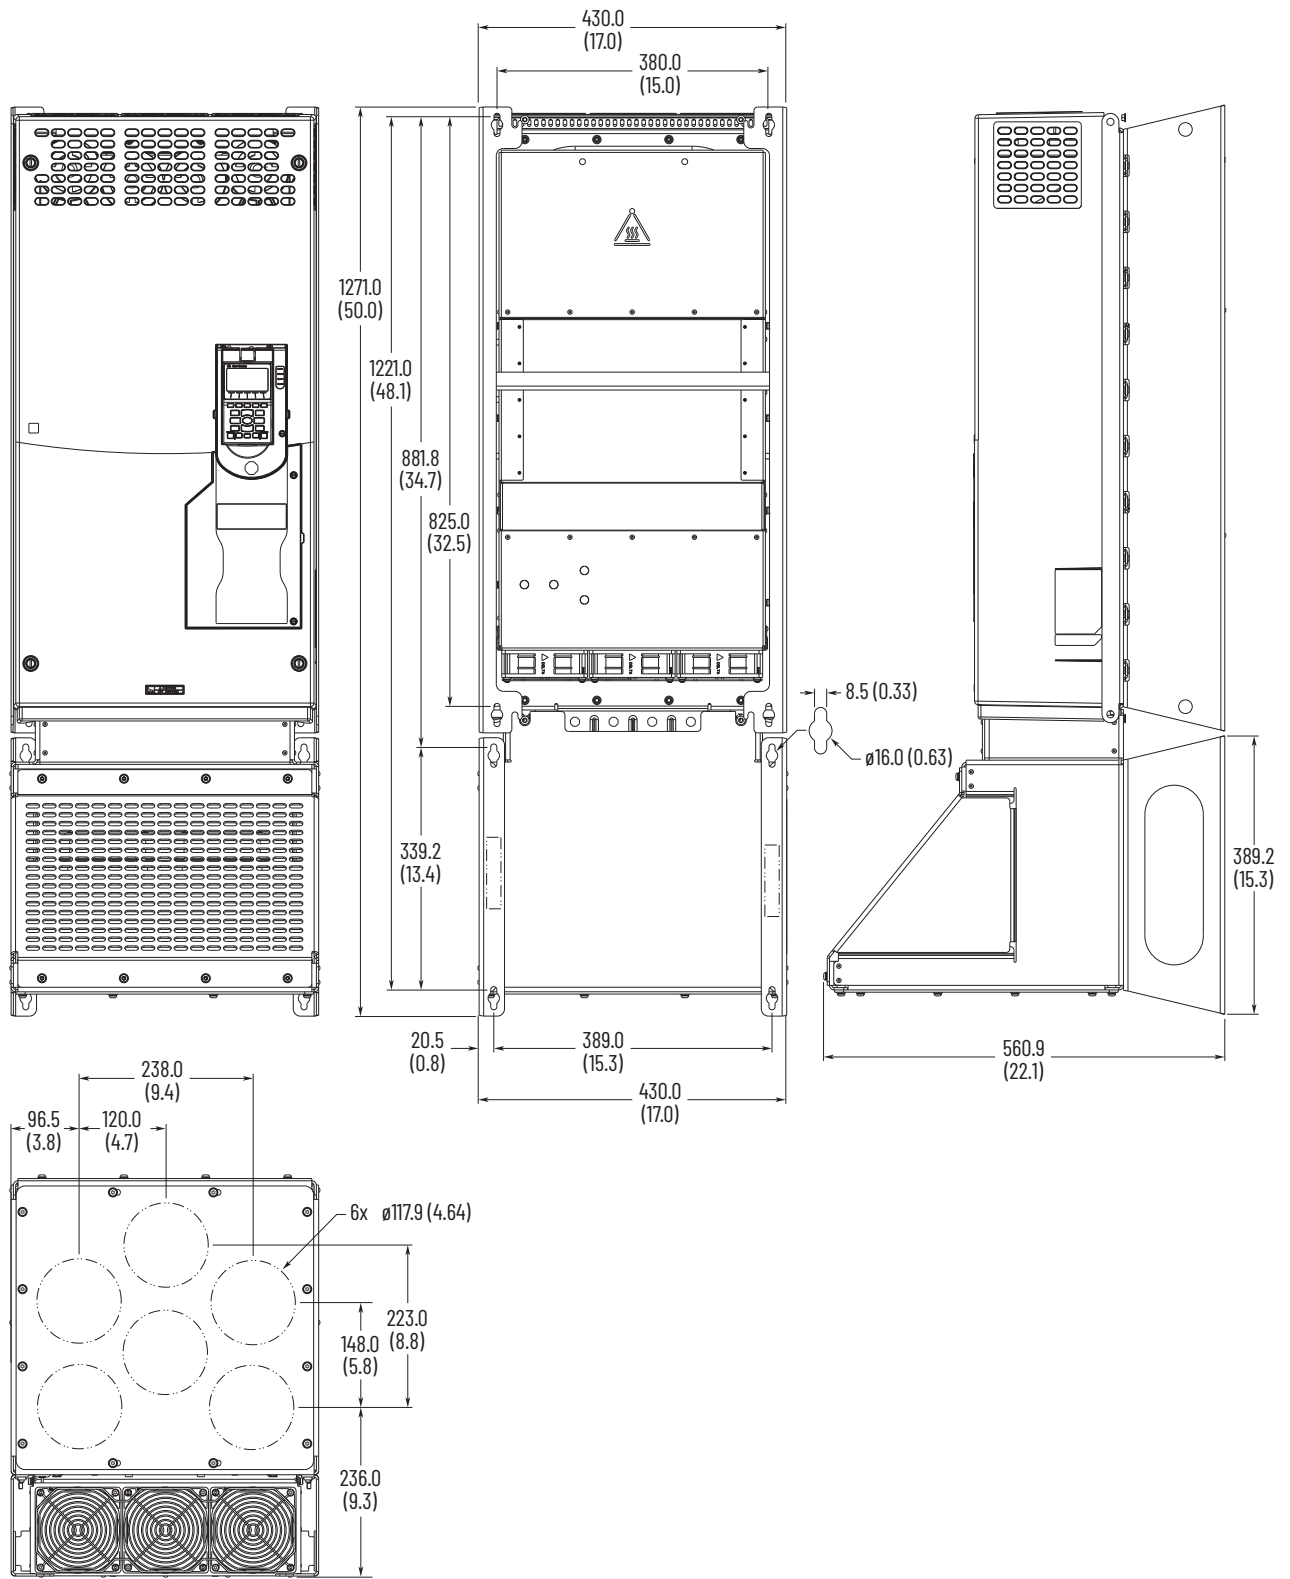

Frame Type Approximate Dimensions [mm (in.)]


7 IP54, NEMA/UL Type 12

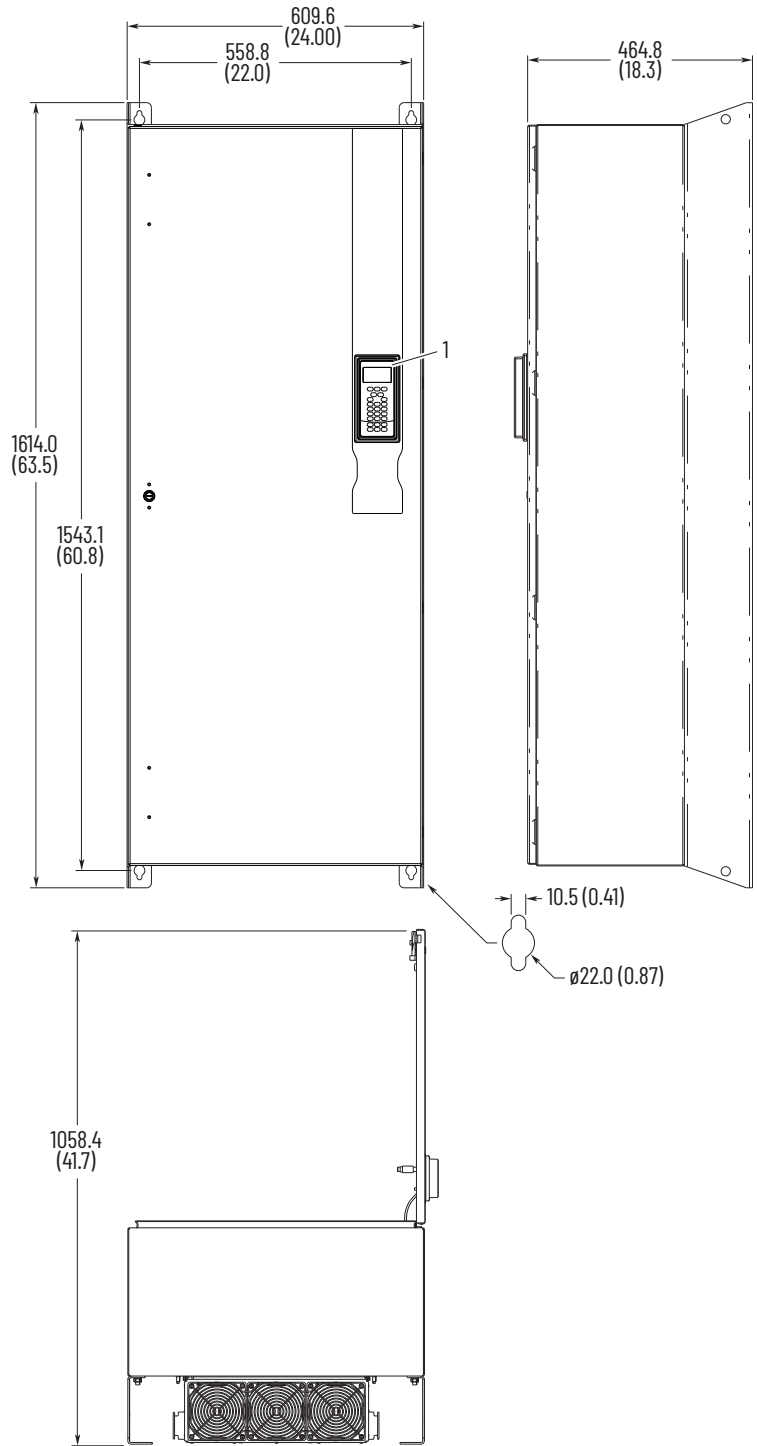

Item	Description
1	Shown with the field-installed 20-HIM-C6S.

Frame Type Approximate Dimensions [mm (in.)]

1...5 NEMA/UL Type 1 Kit

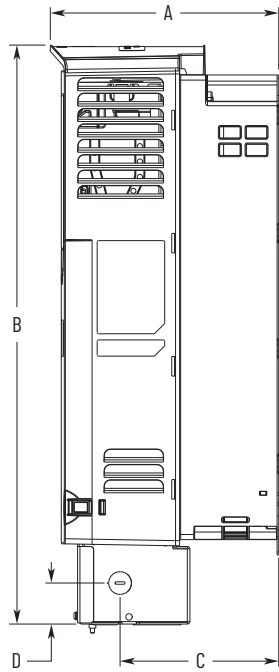


Frame 4 Shown

Frame	A	B	C	D
1	215.4 (8.5)	458.8 (18.1)	—	—
2	222.2 (8.7)	497.1 (19.6)	117.7 (4.6)	38.0 (1.5)
3 ⁽¹⁾	223.1 (8.8)	530.1 (20.9)	154.7 (6.1)	38.0 (1.5)
4	222.7 (8.8)	564.4 (22.2)	154.7 (6.1)	40.0 (1.6)
5	222.7 (8.8)	665.4 (26.2)	155.0 (6.1)	55.0 (2.2)

(1) NEMA/UL Type 1 for 40 HP/30 kW ND frame 3 drives, kit number 20-750-TNEMA1-F3.






IMPORTANT: NEMA/UL Type 1 Kits (20-750-NEMA1-Fx) do not change the mounting dimensions.

6 NEMA/UL Type 1 Kit

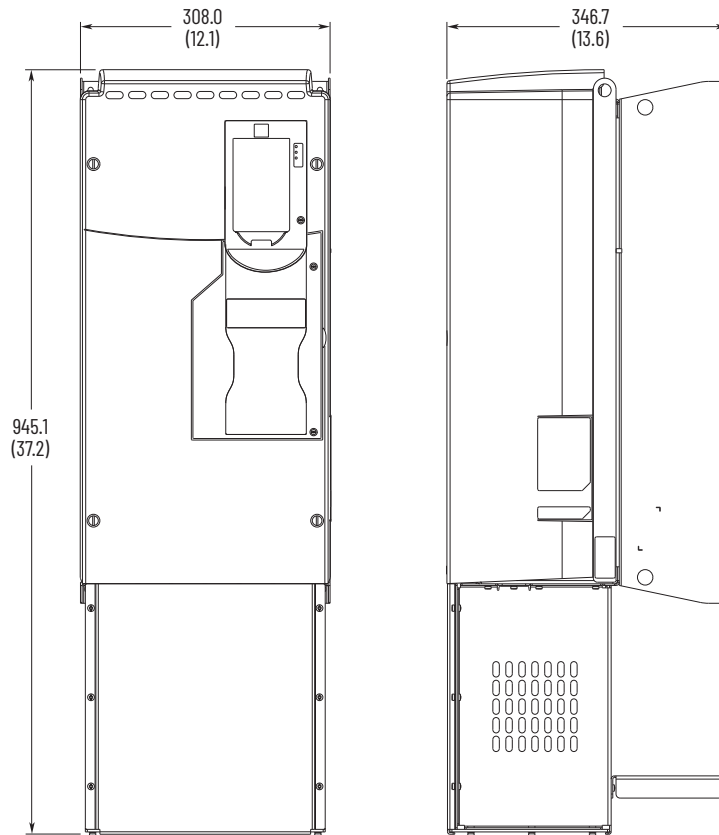

Frame Type Approximate Dimensions [mm (in.)]

1...5 NEMA/UL Type 1
Bottom View

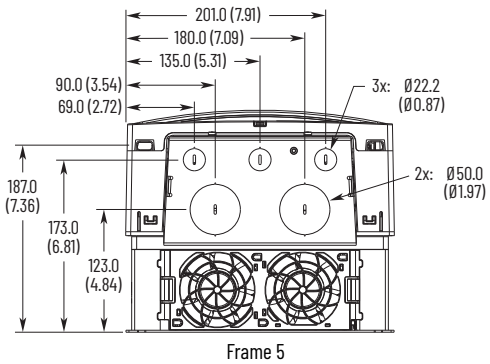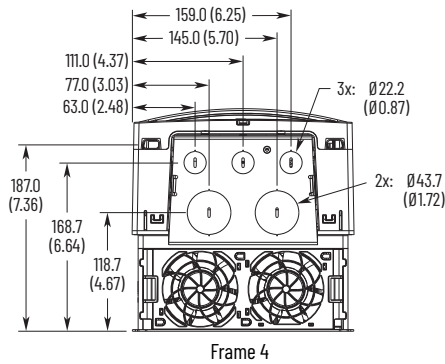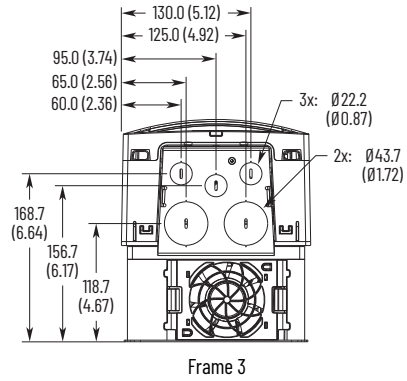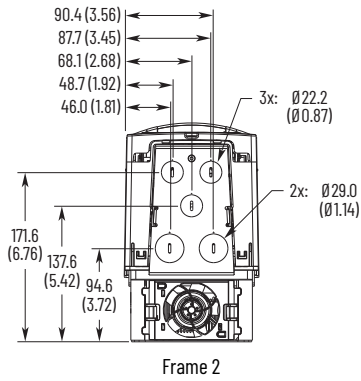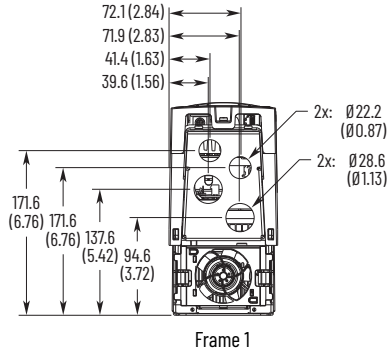

Drive Options

This section provides information on options that are available for PowerFlex 755TS products with TotalFORCE control.

Human Interface Modules

PowerFlex 755TS products with TotalFORCE control are compatible only with the enhanced PowerFlex 7-Class human interface modules listed here.



Cat. No.	Description
20-HIM-A0	No HIM (Blank Plate)
20-HIM-A6	Enhanced, LCD, Full Numeric, Handheld/Local
20-HIM-C6S	Enhanced, LCD, Full Numeric, IP66 NEMA Type 4X/12 (for indoor use only) ⁽¹⁾

(1) Includes a 1202-C30 interface cable (3 meters) for connection to drive.

Specifications - Human Interface Modules

Specification	20-HIM-A6 ⁽¹⁾	20-HIM-C6S ⁽¹⁾
Drive Protocol: Data Rates:	Drive Peripheral Interface (DPI) 125 kbps or 500 kbps	
Consumption Drive (DPI):	140 mA at 12V DC supplied by the Host Drive	
Dimensions - H x W x D 20-HIM-A6: 20-HIM-C6S:	116 x 70 x 16 mm (4.57 x 2.75 x 0.63 in.) 180 x 93 x 25 mm (7.08 x 3.66 x 0.98 in.)	
Weight	91 g (3.2 oz.)	173 g (5.7 oz.)
Temperature Operating: Storage:	-20...+60 °C (-4...+140 °F) -40...+85 °C (-40...+185 °F)	
Relative Humidity	5...95% non-condensing	
Atmosphere	Important: The module must not be installed in an area where the ambient atmosphere contains volatile or corrosive gas, vapors or dust. If the module is not going to be installed for a period of time, it must be stored in an area where it will not be exposed to a corrosive atmosphere.	
UV Radiation	The HIM is not UV rated.	

Specifications - Human Interface Modules (Continued)

Specification	20-HIM-A6 ⁽¹⁾	20-HIM-C6S ⁽¹⁾
Vibration Operating: Non-Operating:	2.5 G at 5...2000 Hz 5 G at 5...2000 Hz	
Shock Operating: Non-Operating:	30 G peak acceleration, 11 (±1) ms pulse width 50 G peak acceleration, 11 (±1) ms pulse width	
UL c-UL CE RCM FCC ID IC	UL 61800-5-1 CAN / CSA C22.2 No. 274 EN61800-3, EN61800-5-1 EN61800-3 — —	

(1) NOTE: This is a product of category C2 according to IEC 61800-3. In a domestic environment this product may cause radio interference in which case supplementary mitigation measures may be required.

Human Interface Module Kits

Description	Cat. No.
Bezel Kit for LCD HIMs, NEMA Type 1 ⁽¹⁾	20-HIM-B1
PowerFlex HIM Interface Cable, 1 m (39 in.) ⁽²⁾	20-HIM-H10
Comm Option Cable Kit (Plug-Plug) 0.33 m (1.1 ft) 1 m (3.3 ft) 3 m (9.8 ft) 9 m (29.5 ft)	1202-C03 1202-C10 1202-C30 1202-C90
Cable Kit (Plug-Socket) ⁽³⁾ 0.33 m (1.1 ft) 1 m (3.3 ft) 3 m (9.8 ft) 9 m (29.5 ft)	1202-H03 1202-H10 1202-H30 1202-H90
DPI Cable Kit with Connectors, Tools and 100 m (328 ft) Cable	1202-CBL-KIT-100M
DPI Cable Connector Kit	1202-TB-KIT-SET
DPI/SCANport™ One to Two Port Splitter Cable	1203-S03

- (1) Includes a 1202-C30 interface cable (3 m) for connection to drive.
- (2) Required only when HIM is used as handheld or remote.
- (3) Required in addition to 20-HIM-H10 for distances up to a total maximum of 10 m (32.8 ft).

PowerFlex 750-Series Drives Option Kits

This section provides information for PowerFlex 750-Series drives option kits.

PowerFlex 750-Series Drives Option Kits

Cat. No.	Description	Frame Size	
20-750-TAPS-XT	Auxiliary power supply	24V auxiliary power supply. Publication 750-IN111 .	1...7
20-750-DCBB3-F6	DC bus bar option kit	DC bus bars for 380...480V AC drives. Publication 750-IN127 .	6
20-750-DCBB3-F7			7
20-750-DCFH-51	DC fuse holders (Qty. 2 holders)	DC fuse and fuse holder kits are recommended for short circuit protection of PowerFlex 755TS DC input drives installed in common bus applications. Publication 750-IN121 .	1...4
20-750-DCFH-NH1			1...7
20-750-DCFH-NH2			5...7
20-750-DCFH-NH3			5...7
20-750-DCFUSE1-nnA	DC fuse kit (Qty. 2 fuses)	Use with 20-750-DCFH-51 fuse holder.	1...4
20-750-DCFUSE3-nnA			1...4
20-750-DCFUSE3S-nnnA			5...7
20-750-DCFUSE5S-nnnA			5...7
20-750-DCFUSE6S-nnnA			5...7
20-750-EMC6-F6	EMC C3 option kit ⁽¹⁾	EMC plate for 380...480V AC drives. Publication 750-IN124 .	6
20-750-EMC6-F7			7
20-750-TFLNG1-F2	Flange mount adapter kit	Converts Open Type drive to external heatsink (flange) with NEMA/UL Type 1 integrity backside. This kit is for use with IP20, NEMA/UL Type 0 drives and does not provide an airtight or watertight seal. Where an airtight or watertight seal is required (for example, contaminated, dirty, or wet environments), use a drive with an "F" enclosure option. Publication 750-IN122 .	2
20-750-TFLNG1-F3			3
20-750-TFLNG1-F4			4
20-750-TFLNG1-F5			5
20-750-TFLNG1-F6			6
20-750-TFLNG1-F7			7
20-750-NEMA1-F1	NEMA/UL Type 1 option kit	Provides NEMA/UL Type 1 IEC 60529 IP20 rating. Publication 750-IN008 .	1
20-750-NEMA1-F2			2
20-750-NEMA1-F3			3
20-750-NEMA1-F4			4
20-750-NEMA1-F5			5
20-750-NEMA1-F6			6
20-750-NEMA1-F7			7
20-750-TNEMA1-F3	NEMA/UL Type 1 option kit - Frame 3	Provides NEMA/UL Type 1 IEC 60529 IP20 rating for 40 HP/30 kW ND frame 3 drives. Publication 750-IN008 .	3
20-750-ACTE1-F6	Power terminal extension	Allows connection of two parallel leads to the AC power terminals. Publication 750-IN012 .	6
20-750-PTG2-F6	Power terminal guard	Provides additional protection against contact with the power terminals. Publication 750-IN126 .	6
20-750-TSTAM-CD-XT	Torque accuracy module	Precise torque control for PowerFlex 755TS drives. Publication 750-IN120 .	2...7

(1) EMC C3 brackets are factory installed on drive frames 2...5 and provided loose with frame 1 drives. Replacement EMC C3 bracket kits (SK-RT-EMC3-Fx) are also available. See the PowerFlex 755TS Products with TotalFORCE Control Installation Instructions, publication [750-IN119](#) for installation instructions.

Communication Option Kits and Accessories

This section provides information for communication option kits and accessories.

Communication Option Kits and Accessories

Cat. No.	Description (see page 96 for specifications)	Publication
20-750-CNETC ⁽¹⁾	Coaxial ControlNet option module	750COM-UM003
20-750-DNET ⁽¹⁾	DeviceNet option module	750COM-UM002
20-750-ENETR ⁽¹⁾	Dual-port EtherNet/IP option module	750COM-UM008
20-750-PBUS	Series B PROFIBUS DPV1 option module	750COM-UM004
20-750-PNET	Series B Single-port Profinet I/O option module	750COM-UM007
20-750-PNET2P	Series B Dual-port Profinet I/O option module	750COM-UM007
20-750-TLINK-XT 20-750-TLINK-FOC-5 20-750-TLINK-FOC-10 20-750-TLINK-FOC-50	Fast synchronized data transfer module	750COM-IN100
1203-USB	Universal serial bus (USB) converter includes 2 m (6.6 ft) USB, 20-HIM-H10, and 22-HIM-H10 cables	DRIVES-UM001
1786-TPS	ControlNet T-tap straight	1786-IN007

(1) See Knowledgebase Technote [Explicit \(CIP\) Messaging PowerFlex 755T](#) for detailed information about using explicit messaging with option modules 20-750-CNETC, 20-750-DNET, or 20-750-ENETR.

Environmental Specifications - Communication Modules

Attribute	Description
Temperature Operating Storage	-20...+60 °C (-4...+140 °F) -40...+85 °C (-40...+185 °F)
Relative humidity	5...95% noncondensing
Atmosphere	IMPORTANT: Do not install the module in an area where the ambient atmosphere contains volatile or corrosive gas, vapors, or dust. If the module is not going to be installed right away, store the module in an area where it is not exposed to a corrosive atmosphere.

Communication Options and Accessories Specifications

Attribute	20-750-CNETC	20-750-DNET	20-750-ENETR	20-750-PBUS	20-750-PNET 20-750-PNET2P	1203-USB
Network Protocol Data rate	ControlNet 5 Mbps (fixed)	DeviceNet 125 Kbps, 250 Kbps, and 500 Kbps	EtherNet/IP 10/100 Mbps, Half/Full Duplex	PROFIBUS 9600 bps...12 Mbps (autobauds)	Profinet 10/100 Mbps	Universal Serial Bus (USB) 115.2 Kbps
Drive Protocol Data rates	DPI 500 Kbps	DPI 500 Kbps	DPI 500 Kbps	DPI 500 Kbps	DPI 500 Kbps	SCANport, DPI, or DSI 125, 125/500, 19.2 Kbps
Consumption Drive (DPI) Network	250 mA at 14V DC None	50 mA at 14V DC 60 mA at 24V DC	250 mA at 14V DC None	250 mA at 14V DC None	250 mA at 14V DC None	130 mA at 12V DC 170 mA at +5V DC (DSI)
Dimensions H x L x W mm (in)	68.0 x 150.0 x 26.0 (2.70 x 5.90 x 1.00)	68.0 x 150.0 x 26.0 (2.70 x 5.90 x 1.00)	68.0 x 150.0 x 26.0 (2.70 x 5.90 x 1.00)	16.0 x 130.0 x 83.0 (0.63 x 5.12 x 3.27)	16.0 x 130.0 x 83.0 (0.63 x 5.12 x 3.27)	103.5 x 73.4 x 23.6 (4.08 x 2.89 x 0.93)
Weight g (oz)	62 (2.1)	62 (2.1)	62 (2.1)	57 (2.0)	60 (2.0)	71 (2.5)
Compliance UL c-UL CE RCM	UL508C CAN/CSA C22.2 No. 14 EN61800-3 EN61800-3	UL508C CAN/CSA C22.2 No. 14 EN61800-3 EN61800-3	UL508C CAN/CSA C22.2 No. 14 EN61800-3 EN61800-3	UL508C CAN/ CSA C22.2 No.14 IEC61800-3 EN61800-3	UL508C CAN/CSA C22.2 No. 14 EN61800-3 EN61800-3	UL508C CAN/CSA C22.2 No. 14 — —

Feedback Options

This section provides information for the feedback options.

Cat. No.	Description
20-750-ENC-1 ⁽¹⁾	Incremental encoder
20-750-ENC-1-XT ⁽¹⁾	Incremental encoder with XT Corrosive Gas Protection
20-750-DENC-1 ⁽¹⁾	Dual incremental encoder
20-750-DENC-1-XT ⁽¹⁾	Dual incremental encoder with XT Corrosive Gas Protection
20-750-UFB-1 ⁽²⁾	Universal feedback board (includes Stegmann, Heidenhain, SSI, Biss, 5V incremental)
20-750-UFB-1-XT ⁽²⁾	Universal feedback board (includes Stegmann, Heidenhain, SSI, Biss, 5V incremental) with XT Corrosive Gas Protection

(1) Homing and registration functions are not supported when using this device with Studio 5000 Logix Designer® embedded motion instructions. To use the homing and registration functions, you must use the Universal Feedback Board (catalog number 20-750-UFB-1).

(2) Only PowerFlex 755 drives.

This table specifies which encoder type combinations work on a universal feedback board (UFB).

Encoder Combinations Compatible with Universal Feedback Board

		Encoder on Channel 0																			
		None	EnDat SC	Hiperface SC	BISS SC	SSI SC	EnDat FD ChX	EnDat FD ChY	BISS FD ChX	BISS FD ChY	SSI FD ChX	SSI FD ChY	SinCos only	Incmntl A B Z	Incmntl SC	LinTempo ChX	LinTempo ChY	LinStahl ChX	LinStahl ChY	Lin SSI ChX	Lin SSI ChY
Encoder on Channel 1	None	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	EnDat SC	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	Hiperface SC	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	BISS SC	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	SSI SC	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	EnDat FD ChX	C	C	C	C	C	N	N	N	C	N	C	C	C	C	N	C	N	C	N	C
	EnDat FD ChY	C	C	C	C	C	N	N	C	N	C	N	C	C	C	C	N	C	N	C	N
	BISS FD ChX	C	C	C	C	C	N	C	N	N	N	C	C	C	C	N	C	N	C	N	C
	BISS FD ChY	C	C	C	C	C	C	N	N	N	C	N	C	C	C	C	N	C	N	C	N
	SSI FD ChX	C	C	C	C	C	N	C	N	N	N	C	C	C	C	N	C	N	C	N	C
	SSI FD ChY	C	C	C	C	C	C	N	C	C	N	N	C	C	C	C	N	C	N	C	N
	SinCos only	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	Incmntl A B Z	C	C	C	C	C	C	C	C	C	C	C	C	C	N	C	C	C	C	C	C
	Incmntl SC	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	LinTempo ChX	C	C	C	C	C	N	C	N	C	N	C	C	C	C	N	C	N	C	N	C
	LinTempo ChY	C	C	C	C	C	C	N	C	N	C	N	C	C	C	C	N	C	N	C	N
	LinStahl ChX	C	C	C	C	C	N	C	N	C	N	C	C	C	C	N	C	N	C	N	C
	LinStahl ChY	C	C	C	C	C	C	N	C	N	C	N	C	C	C	C	N	C	N	C	N
	Lin SSI ChX	C	C	C	C	C	N	C	N	C	N	C	C	C	C	N	C	N	C	N	C
	Lin SSI ChY	C	C	C	C	C	C	N	C	N	C	N	C	C	C	C	N	C	N	C	N

C	Compatible
N	Not compatible

I/O Option Kits

This section provides information for the I/O option kits.

Cat. No.	Description ⁽¹⁾	Publication
20-750-ATEX	ATEX Option Module with 1 Thermosensor Input Connection (requires 11-Series I/O Module below)	750-UM003
20-750-1132C-2R	24V DC 11-Series I/O Module with 1 Analog In, 1 Analog Out, 3 Digital In and 2 Relay Outputs	750-IN11
20-750-1133C-1R2T	24V DC 11-Series I/O Module with 1 Analog In, 1 Analog Out, 3 Digital In, 1 Relay and 2 Transistor Outputs	
20-750-1132D-2R	115V AC 11-Series I/O Module with 1 Analog In, 1 Analog Out, 3 Digital In and 2 Relay Outputs	
20-750-2262C-2R	24V DC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In and 2 Relay Outputs	
20-750-2262C-2R-XT	24V DC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In and 2 Relay Outputs with XT Corrosive Gas Protection	
20-750-2262D-2R	115V AC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In and 2 Relay Outputs	
20-750-2262D-2R-XT	115V AC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In and 2 Relay Outputs with XT Corrosive Gas Protection	
20-750-2263C-1R2T	24V DC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In, 3 Digital Out, 1 Relay and 2 Transistor Outputs	
20-750-2263C-1R2T-XT	24V DC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In, 3 Digital Out, 1 Relay and 2 Transistor Outputs with XT Corrosive Gas Protection	

(1) I/O option kits are not allowed in CIP motion mode.

Safety Options

Four safety options are available for PowerFlex 755TS products.

Cat. No. ⁽¹⁾	Description	Publication
20-750-S	Safe Torque Off	750-UM002
20-750-S-XT	Safe Torque Off with XT Corrosive Gas Protection	
20-750-S1 ⁽²⁾	Safe Speed Monitor	750-RM001
20-750-S1-XT ⁽²⁾	Safe Speed Monitor with XT Corrosive Gas Protection	
20-750-S3	Integrated Safety - Safe Torque Off	750-UM004
20-750-S3-XT	Integrated Safety - Safe Torque Off with XT Corrosive Gas Protection	
20-750-S4	Network Safe Speed Monitor	750-UM005
20-750-S4-XT	Network Safe Speed Monitor with XT Corrosive Gas Protection	

(1) Drive can accommodate only one option.

(2) Requires the dual incremental encoder or universal feedback option.

Safe Torque Off is ideal for safety related applications requiring removal of rotational power to the motor without shutting down the drive. Safe Torque Off functionality offers the benefit of quick start-up after a demand on the safety system and helps reduce wear from repetitive start-up and provides safety ratings up to and including SIL CL3, PLe, and Category 3.

In applications where the speed needs to be controlled and monitored, the Safe-Speed Monitor option combines Safe Torque Off capability with integrated safety relay functionality and the Safe-Speed Control technology in one hardware option to provide safety ratings up to and including SIL CL3, PLe, and Category 4.

With the Safe Speed Monitor option you can safely monitor and control the speed of your application which allows operators to perform process or maintenance work without stopping the machine.

Note that PowerFlex 755TS products can accommodate only one option.

Specifications - PowerFlex 750-Series Safety Options

Attribute	Safe Torque Off, 20-750-S	Safe Speed Monitor, 20-750-S1
Standards	IEC/EN60204-1, ISO13489-1, IEC 61508, IEC 61800-5-2	IEC/EN60204-1, ISO12100, IEC 61508, IEC 61800-5-2
Safety Category	Cat. 3 and PL(e) per EN ISO 13849-1; SIL CL3 per IEC 61508 and EN 62061	Cat. 4 and PL(e) per EN ISO 13849-1; SIL CL3 per IEC 61508 and EN 62061
Power Supply (user I/O)	24V DC \pm 10%, 0.8...1.1 x rated voltage ⁽³⁾ PELV or SELV	
Power Consumption	4.4 W	36 W
Safety Enable (SE+, SE-)	24V DC, 22 mA, short-circuit protected	–
Safety Power (SP+, SP-)	24V DC, 35 mA, short-circuit protected	–
SLS Outputs (68, 78)	–	24V DC, 50 mA, short-circuit protected
SS Outputs (34, 44)	–	24V DC, 50 mA, short-circuit protected
Door Control Outputs (51, 52)	–	24V DC, short-circuit protected, 0.75 A bipolar (Power to Release/ Power to Lock) configuration. 20 mA, cascading (2Ch Source) configuration.
Pulse Outputs (S11, S21)	–	24V DC, 50 mA, short-circuit protected
Pulse Inputs (S12, S22, S32, S42, S52, S62, S72, S82, X32, X42)	–	5 mA per input, max
Input ON Voltage, Minimum	24V DC \pm 10%, 21.6...26.4V DC	15V
Input OFF Voltage, Maximum	5V	5V
Input OFF Current, Maximum	2.5 mA @ 5V DC	2 mA
Input-to-Output Response Time (SS_In, SLS_In, DM_In, ESM_In, LM_In)	–	20 ms
Overspeed Response Time	–	User-configurable
Inputs (S34)	–	5 mA per input, max
Conductor Size ⁽¹⁾	0.3...0.8 mm ² (28...18 AWG)	0.25...2.5 mm ² (24...14 AWG)
Strip Length	10 mm (0.39 in.)	6 mm (0.25 in.)
Terminal Screw Torque	–	0.2...0.25 N•m (1.8...2.2 lb•in)
Certification ⁽²⁾		
c-UL-us	UL Listed, certified for US and Canada.	
CE	European Union 2004/108/EC EMC Directive, and EU 2006/42/EC Machinery Directive EN 61800-3; categories C2 and C3 EN 62061; EM Immunity EN ISO 13849-1 EN ISO 13849-2 EN 61800-5-1 EN 61800-5-2 EN 61508 Parts 1-7	
C-Tick	Australian Radiocommunications Act, compliant with: EN 61800-3; categories C2 and C3	
TÜV	TÜV Certified for Functional Safety: up to SIL CL3, according to EN 61800-5-2, EN 61508, and EN 62061; up to Performance Level PL(e) and Category 3, according to EN ISO 13849-1; when used as described.	TÜV Certified for Functional Safety: up to SIL CL3, according to EN 61800-5-2, EN 61508, and EN 62061; up to Performance Level PL(e) and Category 4, according to EN ISO 13849-1; when used as described.

(1) See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) When product is marked.

(3) Safety outputs need additional fuse for reverse voltage protection of the control circuit. Install a 6 A slow-blow or 10 A fast-acting fuse.

Specifications - Network Safety Options

Attribute	Network Safe Torque Off, 20-750-S3	Network Safe Speed Monitor, 20-750-S4
Standards	EN 60204-1, IEC 61508, EN 61800-3, EN 61800-5-1, EN 61800-5-2, EN 62061, EN ISO 13849	EN 60204-1, IEC 61508, EN 61800-3, EN 61800-5-1, EN 61800-5-2, EN 62061, EN ISO 13849-1
Safety category	Cat. 3 and PLe per ISO 13849-1; SIL CL3 per IEC 61508 and EN 62061	Cat. 4 and PLe per EN ISO 13849-1; SIL 3 per IEC 61508 and SIL CL3 per EN IEC 62061
Power supply (user I/O)	24V DC ±10%, 0.8...1.1 x rated voltage ⁽¹⁾ PELV or SELV	24V DC ±10%, 0.8...1.1 x rated voltage ⁽¹⁾ PELV or SELV
Input type	Current sinking	Current sinking
Voltage, on-state input	11...30V, 3.5 mA DC	11...30V DC
Voltage, off-state input, max	5V, 3.5 mA DC	-3...+5V DC
Current, on-state input, min	3.3 mA	2 mA
Current, off-state, max	1.3 mA	1.5 mA
IEC 61131-2 (input type)	Type 3	Type 3
Conductor type	Multi-conductor shielded cable	Multi-conductor shielded cable
Conductor size ⁽²⁾	0.3...0.8 mm ² (28...18 AWG)	0.3...0.8 mm ² (28...18 AWG)
Strip length	10 mm (0.39 in.)	10 mm (0.39 in.)

(1) Safety outputs need additional fuse for reverse voltage protection of the control circuit. Install a 6 A slow-blow or 10 A fast-acting fuse.

(2) See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Internal Dynamic Brake Resistor Kits

These resistors have a limited duty cycle. To determine whether an internal resistor is sufficient for your application, see the PowerFlex Dynamic Braking Resistor Calculator Application Technique, publication [PFLEX-AT001](#). An external resistor can be required.

Cat. No.	Drive Input Voltage	Frame	Rating (ND kW)	Rating (ND Hp)	Brake Resistance
20-750-DB1-D1	200...240V AC	1	0.37...0.75	0.5...1	62 Ω
20-750-DB1-B1			1.5...4	2...5	22 Ω
20-750-DB1-B2		2	0.37...5.5	0.5...7.5	22 Ω
20-750-DB1-D1A	380...480V AC	1	0.75...2.2	1...3	115 Ω
20-750-DB1-D1			4...7.5	5...10	62 Ω
20-750-DB1-D2		2	0.75...11	1...15	62 Ω

Terminators

This table provided information for terminators.

Cat. No.	Description ⁽¹⁾
1204-TFA1	For use with 3.7 kW (5 Hp) and lower drives.
1204-TFB2	For use with 1.5 kW (2 Hp) and higher drives.

(1) For selection information, see Appendix A of the Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives, publication [DRIVES-IN001](#).

Reflected Wave Reduction Modules with Common Mode Choke

This table provided information for reflected wave reduction modules with common mode choke.

Cat. No.	Description ⁽¹⁾
1204-RWC-17-A	17 A with common mode choke

(1) For selection information, see Appendix A of the Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives, publication [DRIVES-IN001](#).

Reflected Wave Reduction Modules


This table provides information for reflected wave reduction modules.

ND kW	ND Hp	Cat. No.
		380...480V AC
4	5	1321-RWR8-DP
5.5	7.5	1321-RWR12-DP
7.5	10	1321-RWR18-DP
11	15	1321-RWR25-DP
15	20	1321-RWR35-DP
18.5	25	1321-RWR35-DP
22	30	1321-RWR45-DP
30	40	1321-RWR55-DP
37	50	1321-RWR80-DP
45	60	1321-RWR80-DP
55	75	1321-RWR100-DP
75	100	1321-RWR130-DP
90	125	1321-RWR160-DP
110	150	1321-RWR200-DP
132	200	1321-RWR250-DP
187	250	1321-RWR320-DP

Isolation Transformers

This section provides information for isolation transformers.

Figure 1 - IP32, NEMA/UL Type 3R Standalone, 4...6% Nominal Impedance

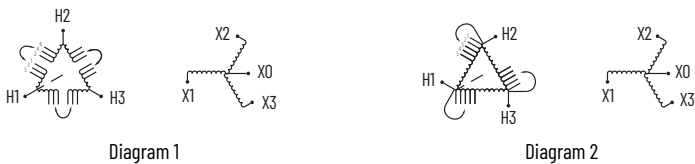

460V, 60 Hz, Three-phase, 460V Primary and 460V Secondary

Motor Rating		Wiring Diagram	Cat. No.
kW	Hp		
0.75	1	1	1321-3TW005-BB
1.5	2	1	1321-3TW005-BB
2.2	3	1	1321-3TW005-BB
22	30	2	1321-3TW040-BB
30	40	2	1321-3TW051-BB
37	50	2	1321-3TH063-BB
45	60	2	1321-3TH075-BB
55	75	2	1321-3TH093-BB
75	100	2	1321-3TH118-BB
90	125	2	1321-3TH145-BB

Motor Rating		Wiring Diagram	Cat. No.
kW	Hp		
110	150	2	1321-3TH175-BB
149	200	2	1321-3TH220-BB
187	250	2	1321-3TH275-BB
224	300	2	1321-3TH330-BB
261	350	1	1321-3TH440-BB
298	400	1	1321-3TH440-BB
336	450	1	1321-3TH550-BB
373	500	1	1321-3TH550-BB
448	600	1	1321-3TH660-BB
485	650	1	-

Motor Rating		Wiring Diagram	Cat. No.
kW	Hp		
522	700	1	1321-3TH770-BB
560	750	1	1321-3TH770-BB
597	800	1	1321-3TH880-BB
671	900	900 kVA	A 1321 isolation transformer solution is not available. Approximate drive kVA is shown at left.
746	1000	1000 kVA	
821	1100	1200 kVA	
933	1250	1200 kVA	
1007	1350	1300 kVA	
1119	1500	1500 kVA	
1492	2000	2000 kVA	

575V, 60 Hz, Three-phase, 575V Primary, and 575V Secondary

Motor Rating		Wiring Diagram	Cat. No.
kW	Hp		
0.75	1	1	1321-3TW005-CC
1.5	2	1	1321-3TW005-CC
2.2	3	1	1321-3TW005-CC
22	30	2	1321-3TW040-CC
30	40	2	1321-3TW051-CC
37	50	2	1321-3TH063-CC
45	60	2	1321-3TH075-CC
55	75	2	1321-3TH093-CC
75	100	1	1321-3TH118-CC

Motor Rating		Wiring Diagram	Cat. No.
kW	Hp		
90	125	1	1321-3TH145-CC
110	150	1	1321-3TH175-CC
149	200	1	1321-3TH220-CC
187	250	1	1321-3TH275-CC
224	300	1	1321-3TH330-CC
261	350	1	1321-3TH440-CC
298	400	1	1321-3TH550-CC
336	450	1	1321-3TH550-CC
373	500	1	1321-3TH660-CC

Motor Rating		Wiring Diagram	Cat. No.
kW	Hp		
410	550	1	1321-3TH660-CC
448	600	1	1321-3TH770-CC
522	700	1	1321-3TH770-CC
597	800	1	1321-3TH880-CC
671	900	950 kVA	A 1321 isolation transformer solution is not available. Approximate drive kVA is shown at left.
709	950	1000 kVA	
746	1000	1100 kVA	
895	1200	1200 kVA	
1119	1500	1500 kVA	

Input and Output Reactors

This section provides information for input and output reactors.

380...480V, 50/60 Hz, Three-phase, 3% Impedance

kW	Hp	Duty	Input Line Reactor		Output Load Reactor	
			IP00 (Open Style)	IP11 (NEMA/UL Type 1)	IP00 (Open Style)	IP11 (NEMA/UL Type 1)
			Cat. No.	Cat. No.	Cat. No.	Cat. No.
0.75	1	Normal	1321-3R2-A	1321-3RA2-A	1321-3R2-A	1321-3RA2-A
1.1	1.5	Heavy	1321-3R4-C	1321-3RA4-C	1321-3R4-B	1321-3RA4-B
1.5	2	Normal	1321-3R4-B	1321-3RA4-B	1321-3R4-B	1321-3RA4-B
		Heavy	1321-3R4-B	1321-3RA4-B	1321-3R8-C	1321-3RA8-C
2.2	3	Normal	1321-3R8-C	1321-3RA8-C	1321-3R8-C	1321-3RA8-C
		Heavy	1321-3R8-C	1321-3RA8-C	1321-3R8-B	1321-3RA8-B
4	5	Normal	1321-3R8-B	1321-3RA8-B	1321-3R8-B	1321-3RA8-B
		Heavy	1321-3R8-B	1321-3RA8-B	1321-3R12-B	1321-3RA12-B
5.5	7.5	Normal	1321-3R12-B	1321-3RA12-B	1321-3R12-B	1321-3RA12-B
		Heavy	1321-3R12-B	1321-3RA12-B	1321-3R18-B	1321-3RA18-B
7.5	10	Normal	1321-3R18-B	1321-3RA18-B	1321-3R18-B	1321-3RA18-B
		Heavy	1321-3R18-B	1321-3RA18-B	1321-3R25-B	1321-3RA25-B
11	15	Normal	1321-3R25-B	1321-3RA25-B	1321-3R25-B	1321-3RA25-B
		Heavy	1321-3R25-B	1321-3RA25-B	1321-3R25-B	1321-3RA25-B
15	20	Normal	1321-3R35-B	1321-3RA35-B	1321-3R25-B	1321-3RA25-B
		Heavy	1321-3R35-B	1321-3RA35-B	1321-3R35-B	1321-3RA35-B
18.5	25	Normal	1321-3R35-B	1321-3RA35-B	1321-3R35-B	1321-3RA35-B
		Heavy	1321-3R35-B	1321-3RA35-B	1321-3R45-B	1321-3RA45-B
22	30	Normal	1321-3R45-B	1321-3RA45-B	1321-3R45-B	1321-3RA45-B
		Heavy	1321-3R45-B	1321-3RA45-B	1321-3R55-B	1321-3RA55-B
30	40	Normal	1321-3R55-B	1321-3RA55-B	1321-3R55-B	1321-3RA55-B
		Heavy	1321-3R55-B	1321-3RA55-B	1321-3R80-B	1321-3RA80-B
37	50	Normal	1321-3R80-B	1321-3RA80-B	1321-3R80-B	1321-3RA80-B
		Heavy	1321-3R80-B	1321-3RA80-B	1321-3R80-B	1321-3RA80-B
45	60	Normal	1321-3R80-B	1321-3RA80-B	1321-3R80-B	1321-3RA80-B
		Heavy	1321-3R80-B	1321-3RA80-B	1321-3R80-B	1321-3RA80-B
55	75	Normal	1321-3R100-B	1321-3RA100-B	1321-3R100-B	1321-3RA100-B
		Heavy	1321-3R100-B	1321-3RA100-B	1321-3R100-B	1321-3RA100-B
75	100	Normal	1321-3R130-B	1321-3RA130-B	1321-3R130-B	1321-3RA130-B
		Heavy	1321-3R130-B	1321-3RA130-B	1321-3R130-B	1321-3RA130-B
90	125	Normal	1321-3R160-B	1321-3RA160-B	1321-3R160-B	1321-3RA160-B
		Heavy	1321-3R160-B	1321-3RA160-B	1321-3R160-B	1321-3RA160-B
110	150	Normal	1321-3R200-B	1321-3RA200-B	1321-3R200-C	1321-3RA200-C
		Heavy	1321-3R200-B	1321-3RA200-B	1321-3R200-C	1321-3RA200-C

380...480V, 50/60 Hz, Three-phase, 3% Impedance (Continued)

kW	Hp	Duty	Input Line Reactor		Output Load Reactor	
			IPO0 (Open Style)	IP11 (NEMA/UL Type 1)	IPO0 (Open Style)	IP11 (NEMA/UL Type 1)
			Cat. No.	Cat. No.	Cat. No.	Cat. No.
—	200	Normal/Heavy	1321-3RB250-B	1321-3RAB250-B	1321-3RB250-B	1321-3RAB250-B
132	—	Normal/Heavy	1321-3RB320-B	1321-3RAB320-B	1321-3RB320-B	1321-3RAB320-B
160	250	Normal/Heavy	1321-3RB320-B	1321-3RAB320-B	1321-3RB320-B	1321-3RAB320-B
—	300	Normal/Heavy	1321-3RB400-B	1321-3RAB400-B	1321-3RB400-B	1321-3RAB400-B
200	—	Normal/Heavy	1321-3RB400-B	1321-3RAB400-B	1321-3RB400-B	1321-3RAB400-B
—	350	Normal/Heavy	1321-3R500-B	1321-3RA500-B	1321-3R500-B	1321-3RA500-B
250	—	Normal/Heavy	1321-3R500-B	1321-3RA500-B	1321-3R500-B	1321-3RA500-B
270	—	Normal/Heavy	1321-3R500-B	1321-3RA500-B	1321-3R500-B	1321-3RA500-B
—	400	Normal/Heavy	1321-3R500-B	1321-3RA500-B	1321-3R500-B	1321-3RA500-B

380...480V, 50/60 Hz, Three-phase, 5% Impedance

kW	Hp	Duty	Input Line Reactor		Output Load Reactor	
			IPO0 (Open Style)	IP11 (NEMA/UL Type 1)	IPO0 (Open Style)	IP11 (NEMA/UL Type 1)
			Cat. No.	Cat. No.	Cat. No.	Cat. No.
0.75	1	Normal	1321-3R2-B	1321-3RA2-B	1321-3R2-B	1321-3RA2-B
1.1	1.5	Heavy	1321-3R4-D	1321-3RA4-D	1321-3R4-D	1321-3RA4-D
1.5	2	Normal	1321-3R4-D	1321-3RA4-D	1321-3R4-D	1321-3RA4-D
		Heavy	1321-3R4-D	1321-3RA4-D	1321-3R8-D	1321-3RA8-D
2.2	3	Normal	1321-3R8-D	1321-3RA8-D	1321-3R8-D	1321-3RA8-D
		Heavy	1321-3R8-D	1321-3RA8-D	1321-3R8-C	1321-3RA8-C
4	5	Normal	1321-3R8-C	1321-3RA8-C	1321-3R8-C	1321-3RA8-C
		Heavy	1321-3R8-C	1321-3RA8-C	1321-3R12-C	1321-3RA12-C
5.5	7.5	Normal	1321-3R12-C	1321-3RA12-C	1321-3R12-C	1321-3RA12-C
		Heavy	1321-3R12-C	1321-3RA12-C	1321-3R18-C	1321-3RA18-C
7.5	10	Normal	1321-3R18-C	1321-3RA18-C	1321-3R18-C	1321-3RA18-C
		Heavy	1321-3R18-C	1321-3RA18-C	1321-3R25-C	1321-3RA25-C
11	15	Normal/Heavy	1321-3R25-C	1321-3RA25-C	1321-3R25-C	1321-3RA25-C
15	20	Normal	1321-3R35-C	1321-3RA35-C	1321-3R25-C	1321-3RA25-C
		Heavy	1321-3R35-C	1321-3RA35-C	1321-3R35-C	1321-3RA35-C
18.5	25	Normal	1321-3R35-C	1321-3RA35-C	1321-3R35-C	1321-3RA35-C
		Heavy	1321-3R35-C	1321-3RA35-C	1321-3R45-C	1321-3RA45-C
22	30	Normal	1321-3R45-C	1321-3RA45-C	1321-3R45-C	1321-3RA45-C
		Heavy	1321-3R45-C	1321-3RA45-C	1321-3R55-C	1321-3RA55-C
30	40	Normal	1321-3R55-C	1321-3RA55-C	1321-3R55-C	1321-3RA55-C
		Heavy	1321-3R55-C	1321-3RA55-C	1321-3R80-C	1321-3RA80-C
37	50	Normal	1321-3R80-C	1321-3RA80-C	1321-3R80-C	1321-3RA80-C
		Heavy	1321-3R80-C	1321-3RA80-C	1321-3R80-C	1321-3RA80-C

380...480V, 50/60 Hz, Three-phase, 5% Impedance (Continued)

kW	Hp	Duty	Input Line Reactor		Output Load Reactor	
			IP00 (Open Style)	IP11 (NEMA/UL Type 1)	IP00 (Open Style)	IP11 (NEMA/UL Type 1)
			Cat. No.	Cat. No.	Cat. No.	Cat. No.
45	60	Normal/Heavy	1321-3R80-C	1321-3RA80-C	1321-3R80-C	1321-3RA80-C
55	75	Normal/Heavy	1321-3R100-C	1321-3RA100-C	1321-3R100-C	1321-3RA100-C
75	100	Normal/Heavy	1321-3R130-C	1321-3RA130-C	1321-3R130-C	1321-3RA130-C
90	125	Normal/Heavy	1321-3R160-C	1321-3RA160-C	1321-3R160-C	1321-3RA160-C
110	150	Normal	1321-3R200-C	1321-3RA200-C	1321-3R200-C	1321-3RA200-C
		Heavy	1321-3R200-C	1321-3RA200-C	1321-3R200-C	1321-3RA200-C
–	200	Normal/Heavy	1321-3RB250-C	1321-3RAB250-C	1321-3RB250-C	1321-3RAB250-C
132	–	Normal/Heavy	1321-3RB320-C	1321-3RAB320-C	1321-3RB320-C	1321-3RAB320-C
160	250	Normal/Heavy	1321-3RB320-C	1321-3RAB320-C	1321-3RB320-C	1321-3RAB320-C
–	300	Normal/Heavy	1321-3RB400-C	1321-3RAB400-C	1321-3RB400-C	1321-3RAB400-C
200	–	Normal/Heavy	1321-3RB400-C	1321-3RAB400-C	1321-3RB400-C	1321-3RAB400-C
–	350	Normal/Heavy	1321-3R500-C	1321-3RA500-C	1321-3R500-C	1321-3RA500-C
250	–	Normal/Heavy	1321-3R500-C	1321-3RA500-C	1321-3R500-C	1321-3RA500-C
270	–	Normal/Heavy	1321-3R500-C	1321-3RA500-C	1321-3R500-C	1321-3RA500-C
–	400	Light/Normal/Heavy	1321-3R500-C	1321-3RA500-C	1321-3R500-C	1321-3RA500-C
315	–	Light/Normal/Heavy	1321-3R600-C	1321-3RA600-C	1321-3R600-C	1321-3RA600-C
336	450	Normal/Heavy	1321-3RA600-C	1321-3RA600-C	1321-3R500-C	1321-3RA500-C
–	450	Light/Normal/Heavy	1321-3R600-C	1321-3RA600-C	1321-3R600-C	1321-3RA600-C
355	–	Light/Normal/Heavy	1321-3R750-C	1321-3RA750-C	1321-3R750-C	1321-3RA750-C
–	500	Light	1321-3R600-C	1321-3RA600-C	1321-3R600-C	1321-3RA600-C
–	–	Normal/Heavy	1321-3R750-C	1321-3RA750-C	1321-3R750-C	1321-3RA750-C
400	–	Light/Heavy	1321-3R750-C	1321-3RA750-C	1321-3R750-C	1321-3RA750-C
–	–	Normal	1321-3R850-C	1321-3RA850-C	1321-3R850-C	1321-3RA850-C
–	600	Light/Normal/Heavy	1321-3R750-C	1321-3RA750-C	1321-3R750-C	1321-3RA750-C
450	–	Light	1321-3R850-C	1321-3RA850-C	1321-3R850-C	1321-3RA850-C
500	–	Normal/Heavy	1321-3R1000-C	1321-3RA1000-C	1321-3R1000-C	1321-3RA1000-C
–	650	Light	1321-3R850-C	1321-3RA850-C	1321-3R850-C	1321-3RA850-C
–	–	Normal	1321-3R750-C	1321-3RA750-C	1321-3R750-C	1321-3RA750-C
–	700	Light/Normal/Heavy	1321-3R850-C	1321-3RA850-C	1321-3R850-C	1321-3RA850-C
–	750	Heavy	1321-3R850-C	1321-3RA850-C	1321-3R850-C	1321-3RA850-C
–	800	Light/Normal/Heavy	1321-3R1000-C	1321-3RA1000-C	1321-3R1000-C	1321-3RA1000-C
560	–	Light/Normal/Heavy	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾
630	–	Light/Normal/Heavy	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾
–	900	Light/Normal/Heavy	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾
710	–	Light/Normal/Heavy	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾
–	1000	Light/Normal/Heavy	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾	1321-3R600-C ⁽¹⁾	1321-3RA600-C ⁽¹⁾

380...480V, 50/60 Hz, Three-phase, 5% Impedance (Continued)

kW	Hp	Duty	Input Line Reactor		Output Load Reactor	
			IP00 (Open Style)	IP11 (NEMA/UL Type 1)	IP00 (Open Style)	IP11 (NEMA/UL Type 1)
			Cat. No.	Cat. No.	Cat. No.	Cat. No.
–	1100	Light/Normal	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾
800	–	Light/Normal	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾
850	–	Light/Normal	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾
–	1250	Light/Normal	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾	1321-3R750-C ⁽¹⁾	1321-3RA750-C ⁽¹⁾
900	–	Light	1321-3R850-C ⁽¹⁾	1321-3RA850-C ⁽¹⁾	1321-3R850-C ⁽¹⁾	1321-3RA850-C ⁽¹⁾
–	1350	Light	1321-3R850-C ⁽¹⁾	1321-3RA850-C ⁽¹⁾	1321-3R850-C ⁽¹⁾	1321-3RA850-C ⁽¹⁾
–	1500	Light	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾
1000	–	Light	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾
–	2000	Light	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾
1400	–	Light	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾	1321-3R850-C ⁽²⁾	1321-3RA850-C ⁽²⁾

(1) Requires two reactors that are wired in parallel.
 (2) Requires three reactors that are wired in parallel.

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

Resource	Description
PowerFlex 755TM IPO0 Open Type Kits Technical Data, publication 750-TD101	Provides detailed information on: <ul style="list-style-type: none"> • Kit selection • Kit ratings and specifications • Option specifications
PowerFlex 755TS Products with TotalFORCE Control Installation Instructions, publication 750-IN119	Provides the basic steps to install PowerFlex 755TL low harmonic drives, PowerFlex 755TR regenerative drives, and PowerFlex 755TM drive systems.
PowerFlex TotalFORCE Firmware Documentation Set: <ul style="list-style-type: none"> • PowerFlex Drives with TotalFORCE Control Programming Manual, publication 750-PM101 • PowerFlex Drives with TotalFORCE Control Parameters Reference Data, publication 750-RD101 • PowerFlex Drives with TotalFORCE Control Conditions Reference Data, publication 750-RD102 	Provides detailed information on: <ul style="list-style-type: none"> • Startup, control algorithms, and status indicators • Parameters and programming • Faults, alarms, events, and troubleshooting
PowerFlex Low Voltage Drives Selection Guide, publication PFLEX-SG002	Provides overview and selection information for PowerFlex low voltage drive products.
Drives in Common Bus Configurations with PowerFlex 755TM Bus Supplies Application Techniques, publication DRIVES-AT005	Provides basic information to properly wire and ground the following products in common bus applications: <ul style="list-style-type: none"> • PowerFlex 755TM drive system for common bus solutions • PowerFlex 750-Series AC and DC input drives • Kinetix 5700 servo drives
PowerFlex 755T Flux Vector Tuning, publication 750-AT006	Provides guidance on how to tune Flux Vector position and velocity loops, filters, and other features to achieve the level of performance that is required for a given application. This publication is intended for novice drives users and users with advanced skills.
PowerFlex Drives with TotalFORCE Control Built-in EtherNet/IP Adapter User Manual, publication 750COM-UM009	Provides information on how to install, configure, and troubleshoot applications for the PowerFlex drives with the built-in EtherNet/IP adapter.
PowerFlex 755TS Products with TotalFORCE Control Hardware Service Manual, publication 750-TG101	Provides detailed information on: <ul style="list-style-type: none"> • Preventive maintenance • Component testing • Hardware replacement procedures
PowerFlex 750-Series Safe Speed Monitor Option Module Safety Reference Manual, publication 750-RM001	These publications provide detailed information on installation, set-up, and operation of the 750-Series safety option modules.
PowerFlex 750-Series Safe Torque Off Option Module User Manual, publication 750-UM002	
PowerFlex 750-Series ATEX Option Module User Manual, publication 750-UM003	
PowerFlex 755 Integrated Safety - Safe Torque Off Option Module User Manual, publication 750-UM004	
PowerFlex 755/755T Integrated Safety Functions Option Module User Manual, publication 750-UM005	
PowerFlex 20-HIM-A6 / -C6S HIM (Human Interface Module) User Manual, 20HIM-UM001	Provides detailed information on HIM components, operation, and features.
PowerFlex 755TS Products with TotalFORCE Control Product Information, publication 750-PC112	These publications identify technical documentation resources that can be obtained on-line at rok.auto/literature .
PowerFlex 755TS Products with TotalFORCE Control Renewal Parts, publication 750-PC113	
Industry Installation Guidelines for Pulse Width Modulated (PWM) AC Drives, publication DRIVES-AT003	Provides basic information on enclosure systems, considerations to help protect against environmental contaminants, and power and grounding considerations for installing Pulse Width Modulated (PWM) AC drives.
Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives, publication DRIVES-IN001	Provides basic information to properly wire and ground PWM AC drives.
EtherNet/IP Network Devices User Manual, ENET-UM006	Describes how to configure and use EtherNet/IP devices to communicate on the EtherNet/IP network.
Ethernet Reference Manual, ENET-RM002	Describes basic Ethernet concepts, infrastructure components, and infrastructure features.
CIP Security Application Technique, SECURE-AT001	Describes how to plan an implement a Rockwell Automation system that support the CIP Security protocol.
Industrial Components Preventive Maintenance, Enclosures, and Contact Ratings Specifications, publication IC-TD002	Provides a quick reference tool for Allen-Bradley industrial automation controls and assemblies.

Resource	Description
Safety Guidelines for the Application, Installation, and Maintenance of Solid-State Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, rok.auto/certifications .	Provides declarations of conformity, certificates, and other certification details.
Rockwell Automation Knowledge Base	The Rockwell Automation Support Forum

You can view or download publications at rok.auto/literature.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, and product notification updates.	rok.auto/support
Knowledgebase	Access Knowledgebase articles.	rok.auto/knowledgebase
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Get help determining how products interact, check features and capabilities, and find associated firmware.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.


Allen-Bradley, DeviceLogix, expanding human possibility, PowerFlex, Rockwell Automation, SCANport, TorqProve, and TotalFORCE are trademarks of Rockwell Automation, Inc.

EtherNet/IP is a trademark of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com ————— expanding **human possibility**[™]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846