

► Model 300SCW-1

SelecTone® Wall Mount Command Unit



Model 300SCW-1 SelecTone® Command Unit generates up to four tones or voice communications through a SelecTone system.

Four tones, auxiliary, test and cancel are controlled via an illuminated keypad. Voice transmission is activated by keying the optional hand held microphone.

Public address can be accessed from the optional local microphone or via the remote microphone input. Public address has the highest priority, followed by tones 1-4, remote microphone and audio.

“Test” plays tones or voice messages through the monitor speaker only. “Cancel” interrupts any tone.

External dry contacts can be wired into the command unit for automatic remote operation of the signal system.

Model 300SCW-1 SelecTone Command Unit is the basis for a simple, versatile general signaling system for weather warning, start and dismissal, general alarm, evacuation and paging.

Model 300SCW-1 Command Unit allows up to four tones and public address capability to be prioritized and broadcast through a SelecTone system.


FEATURES

- Multi-voltage design operates on 24VDC, 120VAC and 240VAC
- Produces four prioritized tone signals and public address using UTM or TM33-SD tone modules
- Remote microphone input
- Wall mount
- Type 1 enclosure
- CSA Certified
- UL Listed

MODEL	VOLTAGE	OPERATING CURRENT	STANDBY CURRENT
300SCW-1	24VDC*	0.76 amps	0.09 amps
	120VAC 50/60Hz	0.2 amps	0.03 amps
	240VAC 50/60Hz	0.1 amps	0.02 amps

*Allows emergency power back-up using PS250, PS600 or PS1000. See page 256

SelecTone® Wall Mount Command Unit (300SCW-1)

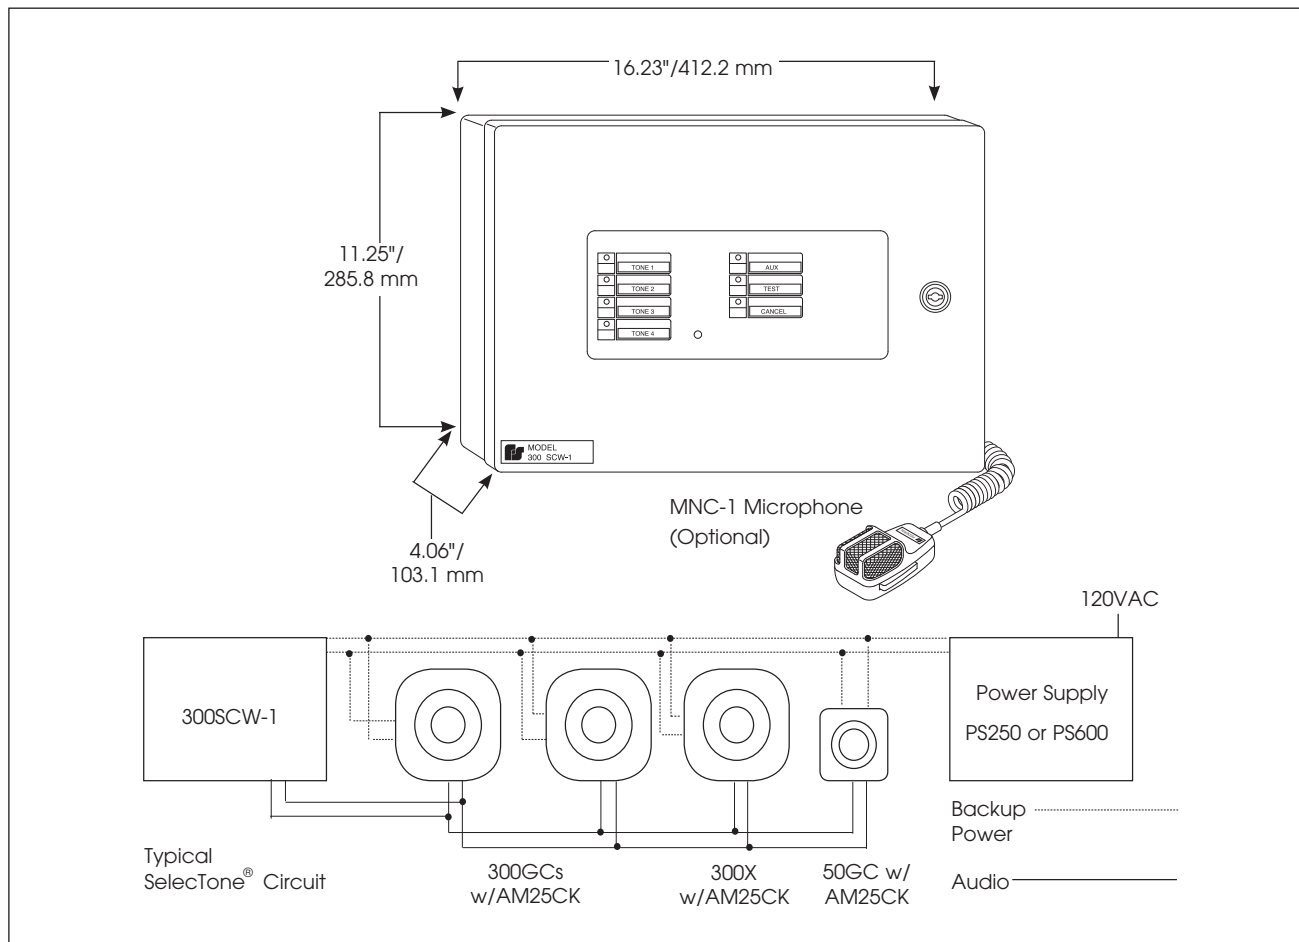

SPECIFICATIONS

Tone Output Levels		
Unbalanced Signal Line		10 Vrms (25 Ohm max.)
Balanced Signal Line		25 Vrms (40 Ohm max./15 watt)
Signal to Noise Ratio		(<1.5% THD) Chip Input 67 dBa
Signal Frequency Response		250Hz to 4.5KHz (typical)
Net Weight:	13.4 lbs	6.1 kg
Shipping Weight:	15.0 lbs	6.8 kg
Height:	11.25"	285.8 mm
Width:	16.23"	412.2 mm
Depth:	4.06"	103.1 mm

HOW TO ORDER

- 1. Specify Model:**
300SCW-1 – SelecTone® Command Unit, wall mount
- 2. Select Required Accessory** (sold separately)
 - A. For stand alone operation, select Tone Module:
 Specify number of **UTM** – Universal Tone Modules, up to four (Reference page 215 for a complete list of tones)
TM33-SD – Custom Tone Module (Reference page 217 for list of tones)

REPLACEMENT PARTS

Description	Part Number
PC Board Assembly, Tone Card Connector	K2001164A
Connector, 17 Position	K140A332A-17
Connector, 16 Position	K140A332A-16

OPTIONAL ACCESSORIES

Description	Part Number
Handheld Microphone	MNC-1
Desktop Microphone	MSB-1