


M-8895 2

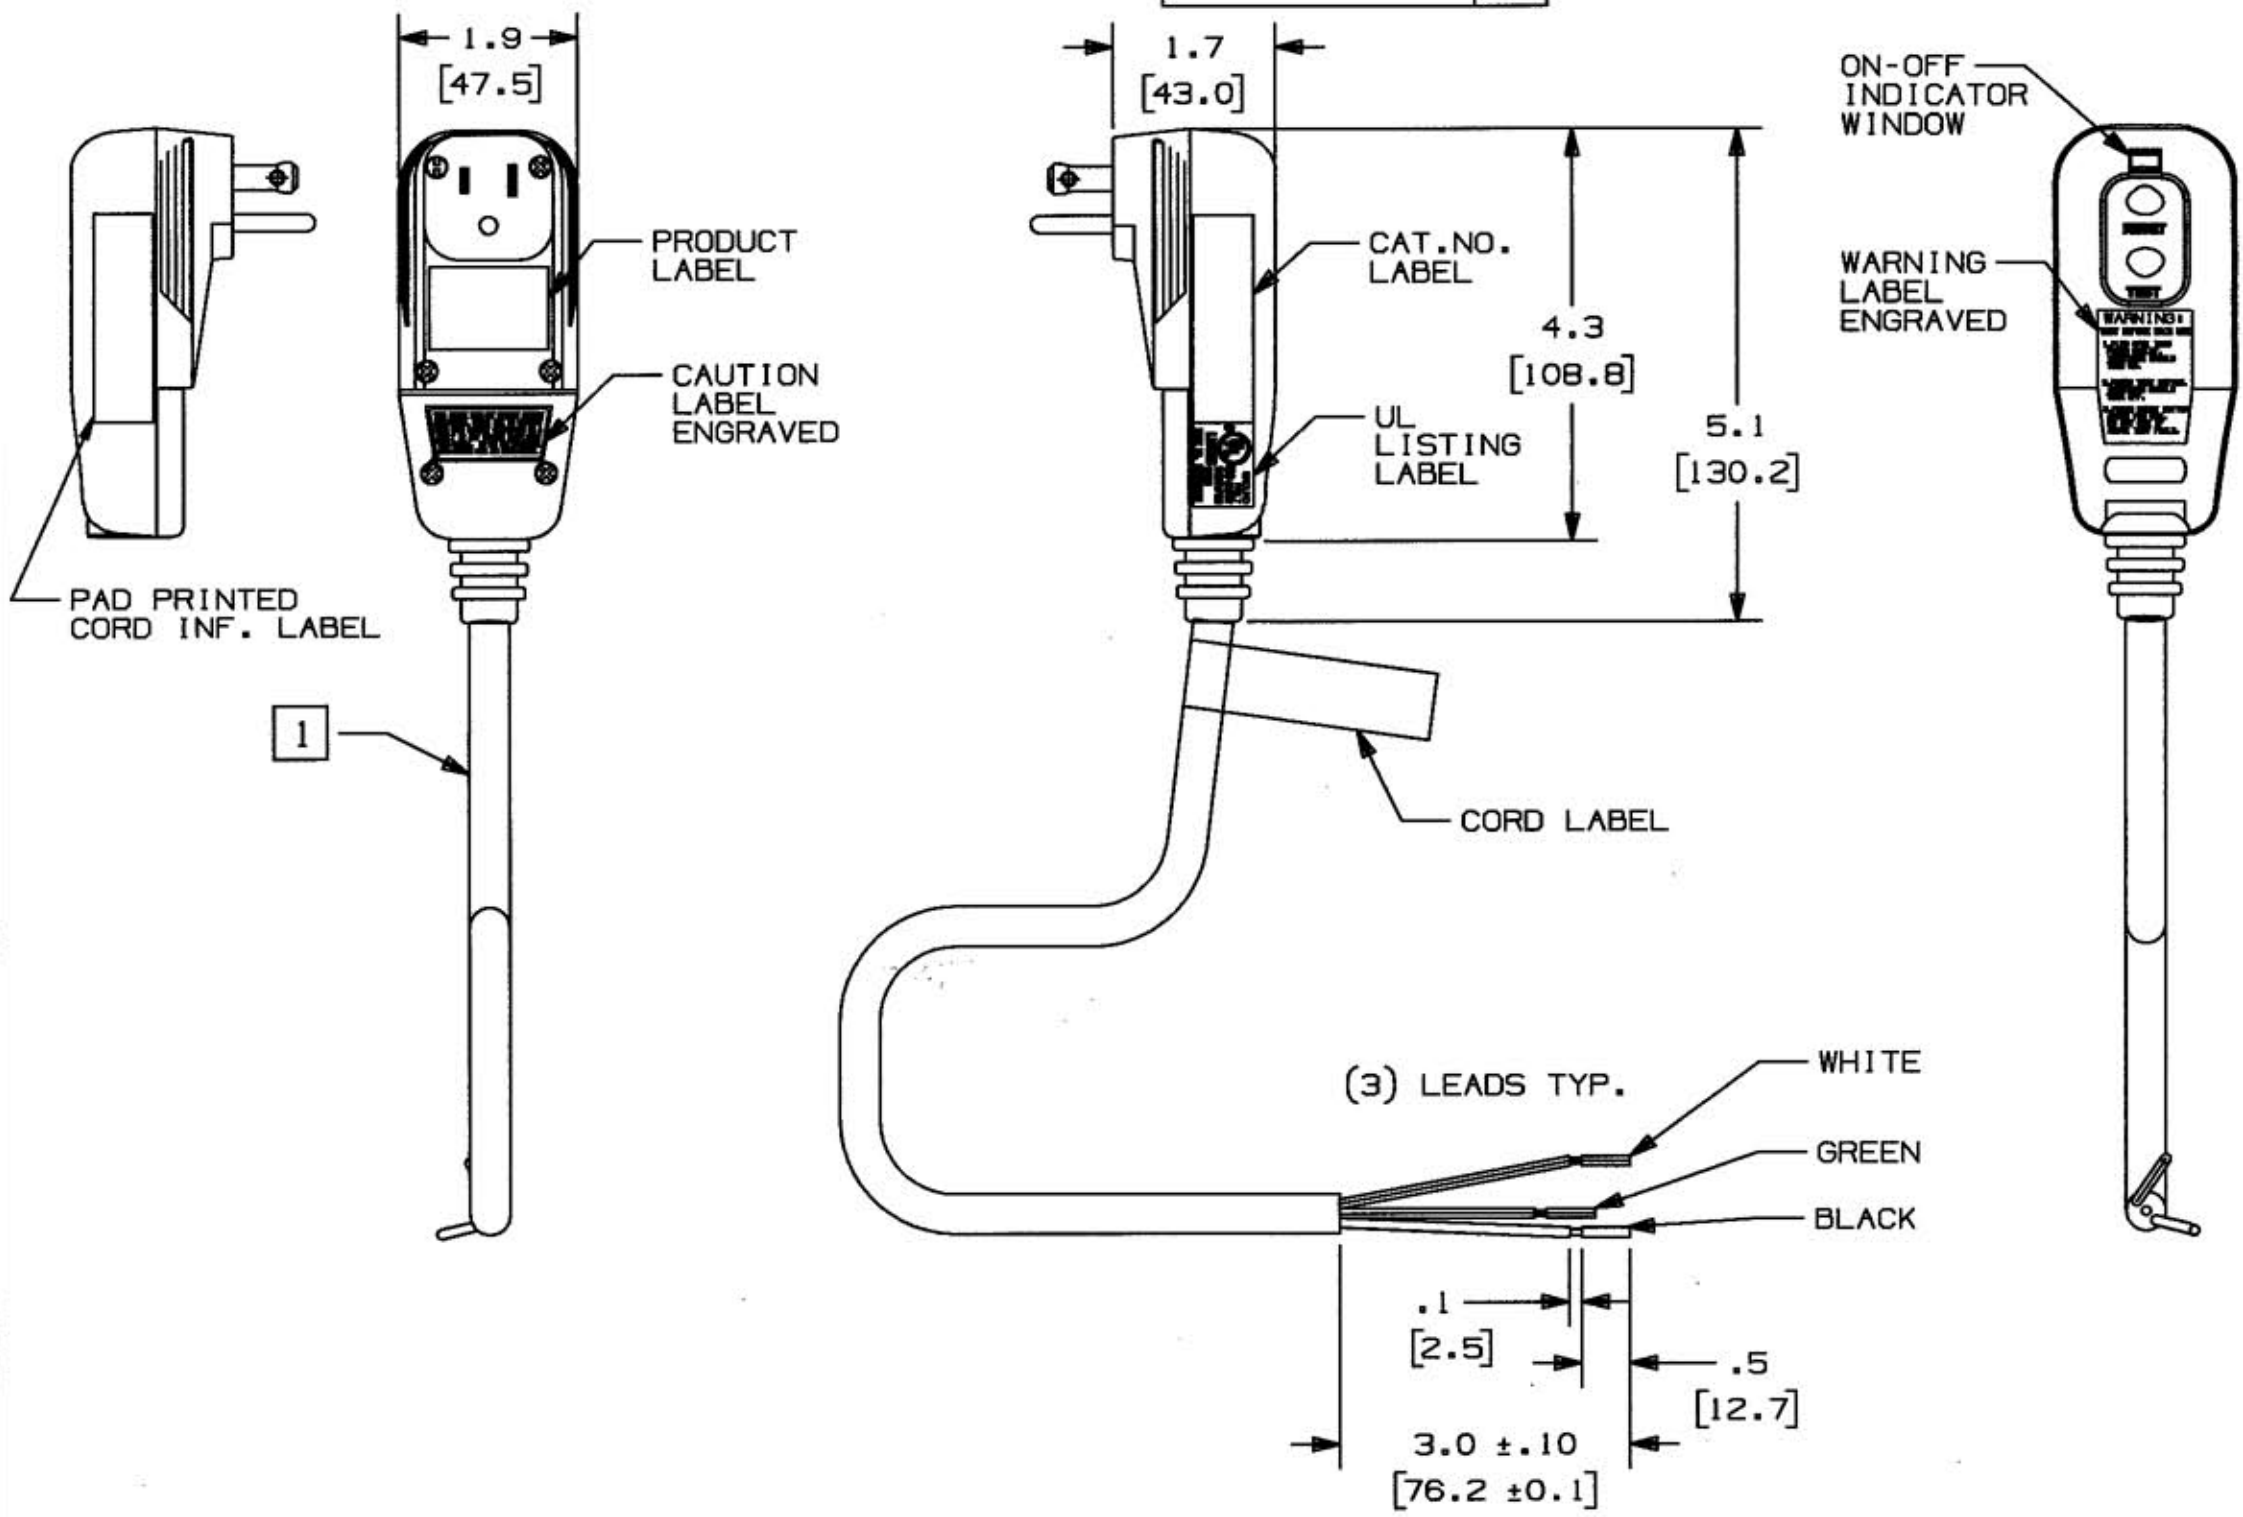

NOTE:  
 1 CABLE (BLACK) 14/3 AWG 300V MIN. 105°C DRY 60°C WATER RESISTANT TYPE SJE00W, UL LISTED FOR U.S. AND EITHER CUL LISTED OR CSA CERTIFIED FOR CANADA. CORD TO BE COILED AND TIED WITH 8" I.D.

CAT. NO.	RESET TYPE	VOLTAGE	AMP	WATTS	HZ	CORD (FT) LENGTH
GFP15LM	MANUAL	120V	15	1800	60	15
GFP15LA	AUTOMATIC	120V	15	1800	60	15
GFP35LM	MANUAL	120V	15	1800	60	35
GFP35LA	AUTOMATIC	120V	15	1800	60	35

DESCRIPTION	MATERIAL	FINISH
GFCI BODY	POLYCARB.	BLACK
GFCI BLADES	BRASS	NONE
RESET BUTTON	POLYCARB.	GREEN
TEST BUTTON	POLYCARB.	BLUE
STRAIN RELIEF	ELASTOMER	BLACK
SCREWS	STEEL	TIN-ZINC
CORD GRIP	POLYCARB.	BLACK
CORD	PVC	BLACK

SYM	REVISIONS	APP	DATE
2	4/7/04 REVISED VIEWS & CALLOUTS TO AGREE WITH NEW DESIGN; ADDED NOTE 1 PER DCN 11630 RCM	SL SC	4/8/04
1	8.2.02 INITIAL RELEASE PER DCN 10077 SM	SM	8.23.02

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE GFCI 15A PLUG WITH FLYING LEADS. CUSTOMER DWG.

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ± 1/64	DR. BY S.M.	APP. BY SM
DECIMALS ± .005	TR. BY	SCALE NONE
ANGLES ± 2°	CHK'D BY SM	DATE 7.26.02

DIMENSION SHEET FOR CAT. NO. M-8895  
 REPAIRABLE  NON-REPAIRABLE   
 B  
 M-8895  
 2