


# Conduit & cable



## Multi-Run Cable Carrier for MC/AC Cable

- Secures and supports multiple runs of MC/AC cable as required by the NEC.
- Effectively organizes cables and eliminates derating issues.
- Retention tab is open for easy loading and unloading and contains cables when bent in place.
- Compatible with new BCH-HBA for multi tier assemblies.
- Load Capacity: 50 lbs.
- Finish: Zinc Plated.

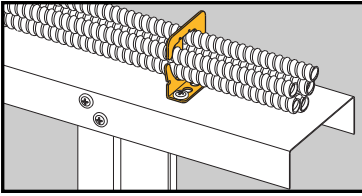

BRC5-1



BRC5-2




BRC5-3



UPC/Part Number	Catalog Number	Cable Diameter & Number Of Runs	Box Qty.
78205143593	<b>BRC5-1</b>	.430" to .560" Up To 4 Runs	50
78205143594	<b>BRC5-2</b>	.430" to .560" Up To 9 Runs	50
78205143595	<b>BRC5-3</b>	.560" to .690" Up To 7 Runs	50

Read safety/installation instruction sheets in packages before use.

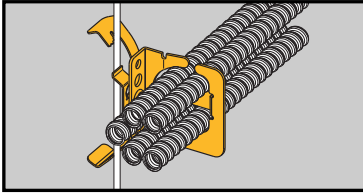

## Multi-Run Cable Carrier for MC/AC Cable

- Secures and supports multiple runs of MC/AC cable as required by the NEC.
- W2 Series attaches to 1/8" thru 3/8" flanges or #12 thru 1/4" plain or threaded rod.
- W6 Series attaches to 3/8" thru 7/16" flanges or 3/8" plain or threaded rod.
- Load Capacity: 50 lbs.
- Finish: Zinc Plated.



UPC/Part Number	Catalog Number	Cable Diameter & Number Of Runs	Box Qty.
78205144075	<b>BRC51-W2</b>	.430" to .560" Up To 4 Runs	25
78205144076	<b>BRC52-W2</b>	.430" to .560" Up To 9 Runs	25
78205144077	<b>BRC53-W2</b>	.560" to .690" Up To 7 Runs	25
78205144078	<b>BRC51-W6</b>	.430" to .560" Up To 4 Runs	25
78205144079	<b>BRC52-W6</b>	.430" to .560" Up To 9 Runs	25
78205144080	<b>BRC53-W6</b>	.560" to .690" Up To 7 Runs	25

Note: An independent means of support is required by NEC Article 300.11. Refer to pages 221-222 for additional support methods.

*Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.*