

# STAINLESS STEEL HUBS


## Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless threaded conduit
- Use of neoprene O-ring assures weatherproof seal
- Includes a type 316 stainless steel locknut for a secure installation
- No package qty. required



## Applications:

To connect threaded stainless conduit to a threadless opening in a box or enclosure in an outdoor or indoor location. To positively bond conduit to a box or enclosure.

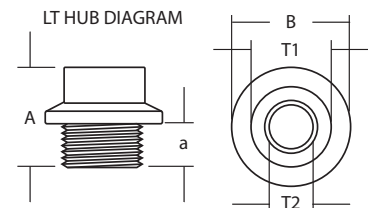

## Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Pulp & Paper Mills
- Along with other corrosive environments

Part Number	Trade Size (in)	A (in)	B (in)	a (in)	T1 (in)	T2 (in)	Male Thread O.D. (in)	Weight each per (lb)
S60500LT00	½	1.670	1.700	0.620	1.100	0.750	0.840	0.390
S60700LT00	¾	1.680	1.930	0.675	1.350	0.960	1.050	0.530
S61000LT00	1	2.070	2.200	0.830	1.600	1.210	1.315	0.750
S61200LT00	1¼	2.060	2.560	0.850	1.960	1.560	1.660	0.970
S61500LT00	1½	2.080	2.800	0.870	2.200	1.800	1.900	1.170
S62000LT00	2	2.100	3.320	0.875	2.730	2.290	2.375	1.650
S62500LT00	2½	2.720	3.800	0.950	3.310	2.730	2.875	2.250
S63000LT00	3	2.910	4.500	0.975	3.860	3.350	3.500	3.000
S64000LT00	4	3.190	5.500	1.090	5.000	4.360	4.500	4.860

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [atkore.com/calbrite](http://atkore.com/calbrite)

