
_

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
- 2. DIMENSIONS IN BRACKETS [] ARE ENGLISH.
- 3. ALL MATERIALS AND COMPONENTS USED MUST MEET
 THE MATERIAL RESTRICTIONS OF ROHS (EUROPEAN
 DIRECTIVE 2002/95/EC ON THE RESTRICTION OF
 HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS
 TECHNICAL ADAPTATION COMMITEE.

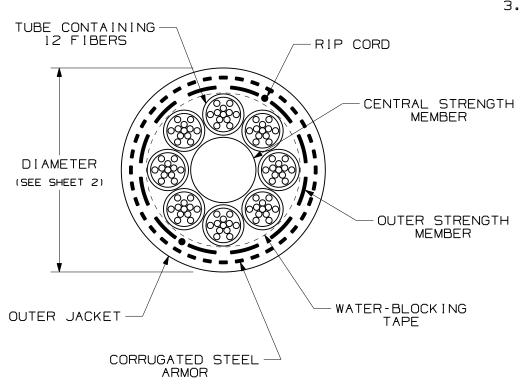

TEC	HNICAL S	PECIFICATI	IONS			
MAXIMUM LOS	SS	SINGLEMO	DE MAXIMUM LOSS			
3.5 dB/KM @ 8		.40 dB/KM @ !3!0nm .30 dB/KM @ !500nm				
	BEND	RADIUS				
INSTALLAT	ION	l	LONG TERM			
31.8cm		15.9cm				
[12.4in]	[6.2in]				
INSTALLAT	ION	Į	LONG TERM			
2700 N			890 N			
(600 16	`)	(200 16f)				
	TEMPERATURE					
INSTALLATION	OPEF	RATION	STORAGE			
-30°C TO +60°C -22°F TO +140°F		TO +70°C ΓΟ +158°F	-40°C TO +75°C -40°F TO +167°F			

OUTSIDE PLANT SINGLE ARMOR-SINGLE JACKET CABLE WITH (8) 12 FIBER SUB-UNITS CUSTOMER DRAWING TM CORP. TINLEY PARK, ILL 60477 ALL DIMENSIONA FOR GIVEN IN INCIES. DIMENSIONAL TOLERANCES ARE: (1, XXX120.81.031 ANGLES REVIEW DRAWING NAMBERS PART NO. FSWN + 96 FFK O7-10-07 ORANIN DO DATE O7-10-07 O2 10-29-09 EFK RELEASED TO PRODUCTION O2055-160 OTHER DATE O7-10-07 ALL DIMENSIONAL TOLERANCES ARE: (1, XXX120.81.031 ANGLES) PART NO. FSWN + 96 ORANING NO. SIZE O7-10-07	REV	DATE	BY	CHK	DESCRIPTION	ECN -	R	CUST	SUP	отн	MWV CHK.D		SHEET 1 OF 2	
CABLE WITH (8) 12 FIBER SUB-UNITS CUSTOMER DRAWING TM CORP. TINLEY PARK, ILL 60477 ALL DIMENSIONAL TOLERANCES ARE: (IX) (IX) 10.3 I.010 SCALE DRAWING ILL STANDED (IX) (IX) 10.3 I.010 SCALE NONE DRAWN BY REVIEW DRAWING NUMBERS PART NO. FSWN 96	02	10-29-09	EFK		RELEASED TO PRODUCTION	02055-160							DRAWING NO. 02055 - 160	SIZE
CABLE WITH (8) 12 FIBER SUB-UNITS CUSTOMER DRAWING TM CORP. TINLEY PARK, ILL 60477 ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED, MO2055DA_DC_96/OOC DIMENSIONS ARE CONTRACTED AND ALL DIMEN												REVIEW DRAWING NUMBERS	1 311114 30	
CABLE WITH (8) 12 FIBER SUB-UNITS CUSTOMER DRAWING TM TINLEY PARK, ILL 60477 ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED, MO2055DA_DC_96/00C												(.XX)±0.8 (.03) ANGLES	14014	
CABLE WITH (8) 12 FIBER SUB-UNITS CUSTOMER DRAWING TM CORP. TINLEY PARK, ILL 60477												UNLESS OTHERWISE SPECIFIED.	MO2055DA_DC_96	5/00C
CABLE WITH (8) 12 FIBER SUB-UNITS CUSTOMER DRAWING TM													60477	
CABLE WITH (8) 12 FIBER SUB-UNITS													тм	
											CABL			J

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	FIBER TYPE	FIBER COUNT	TUBE COUNT	DIAMETER
FSWN996	SINGLEMODE 9/125um			
FSWN696	MULTIMODE 62.5/125um			
FSWN596	MULTIMODE 50/125um	96	8 WITH 12 FIBERS	15.9mm [0.62"]
FOWNX96	MULTIMODE 50/125um OM3			
FOWNZ96	MULTIMODE 50/125um OM4			

REV	DATE	ВҮ	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK'D
02	10-29-09	EFK		RELEASED TO PRODUCTION	02055-160					07-10-07 DRAWING NO. SIZE 02055-160 A
										DRAWN BY REVIEW DRAWING NUMBERS PART NO. FSWN+96 FOWN+96
										THIRD ANGLE (.XX):0.8 [.03] ANGLES NOIS NONE
										ALL DIMENSIONS ARE GIVEN IN INCHES, DRAWING FILENAME UNLESS OTHERWISE SPECIFIED, MO2055DA_DC_96/00C
										TINLEY PARK, ILL 60477
										TANDUT COPP
										CUSTOMER DRAWING
										OUTSIDE PLANT SINGLE ARMOR-SINGLE JACKE' CABLE WITH (8) 12 FIBER SUB-UNITS