









Dragon Tooth® Magnet Wire Termination System

Secure connections easily!

Ring Terminals

Wire Termination — Sta-Kon® Wire Termination & Insulation



CAT. NO.	STUD SIZE	DIMENSIONS (IN.)					CIRCULAR MIL AREA	ROUND WIRE RANGE (AWG)	RECTANGULAR WIRE RANGE (IN.)		PKG. QTY.
		A	B	C	D	E*			THICKNESS	WIDTH	
1											
314125	10	.38	.56	1.22	.41	.14	3,260-12,330	15-13	.05-.06	.05-.18	250
314123	1/4"	.38	.56	1.41	.41	.14	3,260-12,330	15-13	.05-.06	.05-.18	250
210219	8	.38	.56	1.22	.41	.17	4,110-20,760	14(a)-10	.08-.09	.08-.18	250
210217	10	.38	.56	1.22	.41	.17	4,110-20,760	14(a)-10	.08-.09	.08-.18	250
210216	1/4"	.38	.56	1.41	.41	.17	4,110-20,760	14(a)-10	.08-.09	.08-.18	250
1											
204217	10	.53	.61	1.58	.50	.25	10,380-52,480	12(b)-4(c)	.10-.16	.10-.26	100
204212	1/4"	.53	.61	1.58	.50	.25	10,380-52,480	12(b)-4(c)	.10-.16	.10-.26	100
210214-1	1/4"	.38	.56	1.41	.69	.17	4,110-20,760	14(a)-10	.08-.09	.08-.18	250
210214-2	3/16"	.38	.56	1.41	.69	.17	4,110-20,760	14(a)-10	.08-.09	.08-.18	250
210214-3	3/8"	.38	.56	1.41	.69	.17	4,110-20,760	14(a)-10	.08-.09	.08-.18	250
204210-1	1/4"	.53	.61	1.58	.81	.25	10,380-52,480	12(b)-4(c)	.10-.16	.10-.26	100
204210-2	3/16"	.53	.61	1.58	.81	.25	10,380-52,480	12(b)-4(c)	.10-.16	.10-.26	100
204210-3	3/8"	.53	.61	1.58	.81	.25	10,380-52,480	12(b)-4(c)	.10-.16	.10-.26	100
204210-5	1/2"	.53	.61	1.58	.81	.25	10,380-52,480	12(b)-4(c)	.10-.16	.10-.26	100
3											
204210-1H	1/4"	.53	.61	1.58	.81	.47	20,760-104,960	12(b)-4(c)	.10-.16	.10-.26	100
204210-3H	3/8"	.53	.61	1.58	.81	.47	20,760-104,960	12(b)-4(c)	.10-.16	.10-.26	100
220017	3/8"	.88	1.50	2.76	1.06	(d)	50,000-115,000	.100-.175	—	.300-.625	25
220018	1/2"	.88	1.50	2.76	1.06	(d)	50,000-115,000	.100-.175	—	.300-.625	25
220021	3/8"	.88	1.50	2.76	1.06	(d)	110,000-175,000	—	.175-.250	.300-.625	25
220022	1/2"	.88	1.50	2.76	1.06	(d)	110,000-175,000	—	.175-.250	.300-.625	25
220025	3/8"	.88	1.50	2.76	1.06	(d)	110,000-230,000	—	.175-.325	.300-.625	25
220026	1/2"	.88	1.50	2.76	1.06	(d)	110,000-230,000	—	.175-.325	.300-.625	25
22R061**	6	.16	.32	.78	.30	.10	404-4100	15-24	.02-.05	.02-.10	1000
22R081**	8	.16	.32	.78	.30	.10	404-4100	15-24	.02-.05	.02-.10	1000
22R101**	10	.16	.32	.78	.30	.10	404-4100	15-24	.02-.05	.02-.10	1000
22R086	8	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
22R106	10	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
6											
22R146	1/4"	.25	.45	.95	.42	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000

* Reference dimension. See installing die illustration for gauging. (a) Four wires max. (b) Six wires max. (c) Conductors heavier than #6 AWG require special dies. Contact Thomas & Betts for assistance. (d) Crimping dies may not bottom. Connector height will depend on number and size of wires in barrel. Pump must deliver 9800 psi minimum.




Note: Wire sizes and combinations shown have been tested to and meet or exceed Thomas & Betts specifications. Connectors may be suitable for other wire sizes or combinations. Thomas & Betts sells these connectors with the understanding that the user will perform necessary tests to determine their suitability for the intended purpose.

** #22-#24 AWG and equivalent rectangular CMA, copper only.

Dragon Tooth® Magnet Wire Termination System

Connectors for every application!

Fork Terminals

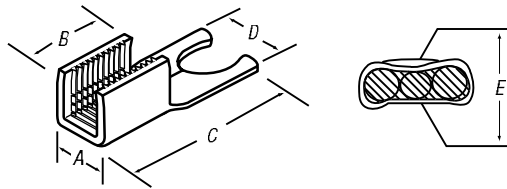




CAT. NO.	STUD SIZE	DIMENSIONS (IN.)					CIRCULAR MIL AREA	ROUND WIRE RANGE (AWG)	RECTANGULAR WIRE RANGE (IN.)		PKG. QTY.
		A	B	C	D	E*			THICKNESS	WIDTH	
1 22F061**	6	.16	.32	.78	.30	.10	404-4100	15-24	.02-.05	.02-.10	1000
1 22F081**	8	.16	.32	.78	.30	.10	404-4100	15-24	.02-.05	.02-.10	1000
1 22F101**	10	.16	.32	.78	.30	.10	404-4100	15-24	.02-.05	.02-.10	1000
1 22F066	6	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
1 22F086	8	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
1 22F106	10	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
2 210219F	6	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
2 210217F	8	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
2 210216F	10	.25	.45	.91	.30	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000

* Reference dimension. See installing die illustration for gauging.

** #22-#24 AWG and equivalent rectangular CMA, copper only.

Durable and convenient!

Disconnects

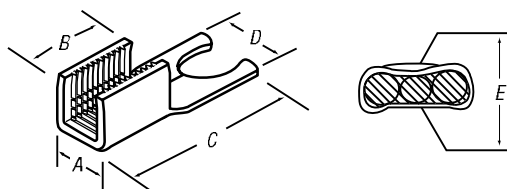

CAT. NO.	TAB SIZE	DIMENSIONS (IN.)					CIRCULAR MIL AREA	ROUND WIRE RANGE (AWG)	RECTANGULAR WIRE RANGE (IN.)		PKG. QTY.
		A	B	C	D	E*			THICKNESS	WIDTH	
1 22LM01**	.250 x .032	.16	.32	.76	.25	.10	404-4100	15-24	.02-.05	.02-.10	1000
1 22LM06	.250 x .032	.25	.45	.91	.25	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000
2 22LF01**	.250 x .032	.16	.32	.79	.25	.10	404-4100	15-24	.02-.05	.02-.10	1000
2 22LF06	.250 x .032	.25	.45	.91	.25	.13	2,580-12,330	12-16	.05-.08	.05-.16	1000

* Reference dimension. See installing die illustration for gauging.

Note: Wire sizes and combinations shown have been tested to and meet or exceed Thomas & Betts specifications. Connectors may be suitable for other wire sizes or combinations. Thomas & Betts sells these connectors with the understanding that the user will perform necessary tests to determine their suitability for the intended purpose.

** #22-#24 AWG and equivalent rectangular CMA, copper only.